


OffSet Bumper Seal Thresholds



Bumper Seal Thresholds



884-6	1.10 lbs./ft.	6"
884-6DKB	1.10 lbs./ft.	
884-7	1.31 lbs./ft.	7"
884-7DKB	1.31 lbs./ft.	
884-8	1.52 lbs./ft.	8"
884-8DKB	1.52 lbs./ft.	

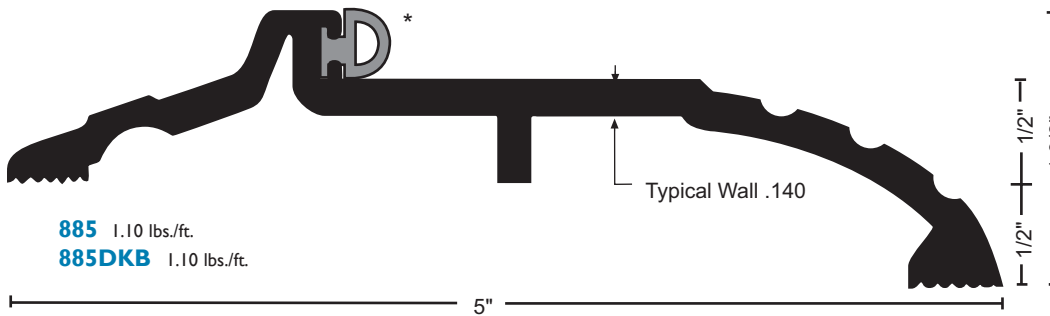


885	1.10 lbs./ft.
885DKB	1.10 lbs./ft.


*** HD**
Bumper Seal
 Seals against the door providing weather resistance

Vinyl ("V") supplied unless other material is specified

Options:
 Neoprene ("N")
 Silicone ("S")
 Pile ("P")

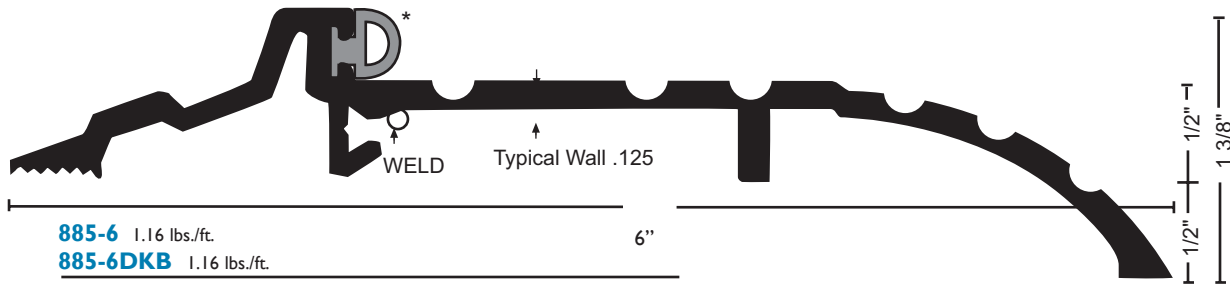

885-6	1.16 lbs./ft.	6"
885-6DKB	1.16 lbs./ft.	
885-7	1.16 lbs./ft.	7"
885-7DKB	1.16 lbs./ft.	
885-8	1.16 lbs./ft.	8"
885-8DKB	1.16 lbs./ft.	

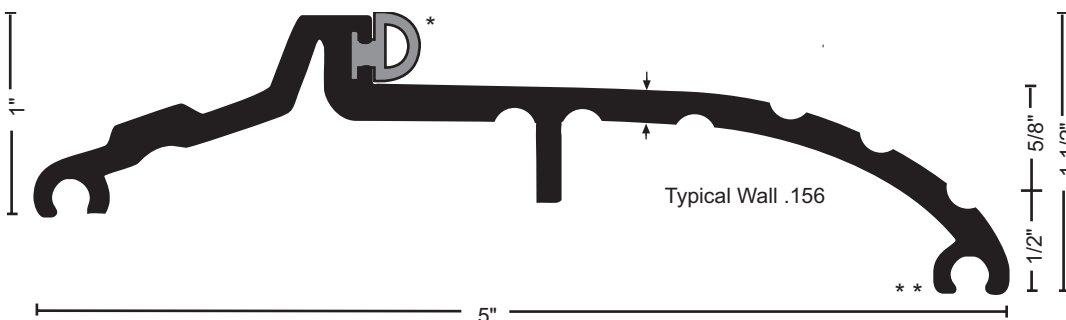

888	1.22 lbs./ft.
888DKB	1.22 lbs./ft.

VINYL FOOT SEAL
 used instead of caulking to increase the weather resistance of the threshold.
 Specify on order