





8135 .60 lbs./ft.
8135DKB .60 lbs./ft.




892 .61 lbs./ft.
892DKB .61 lbs./ft.

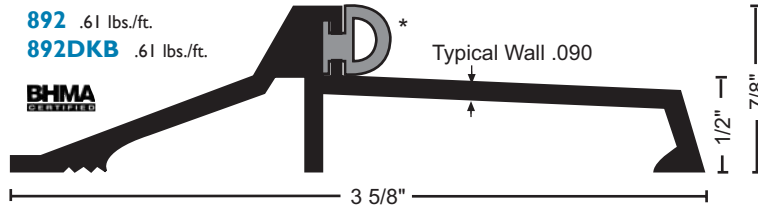


893 .86 lbs./ft.
893DKB .86 lbs./ft.

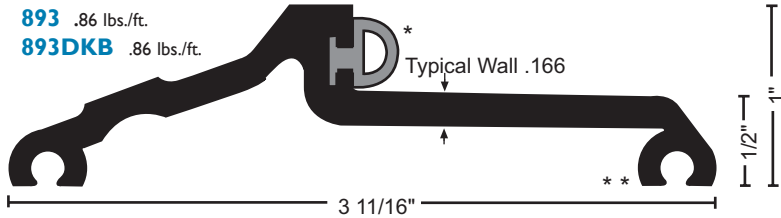


897 .91 lbs./ft.
897DKB .91 lbs./ft.

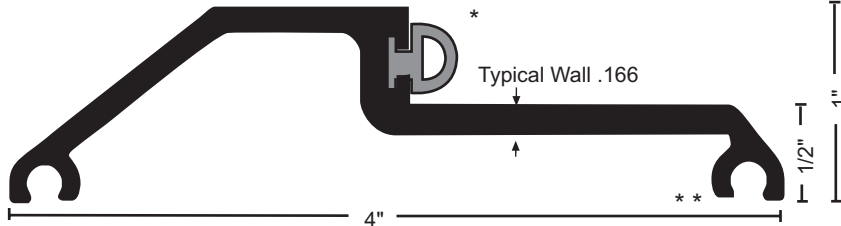



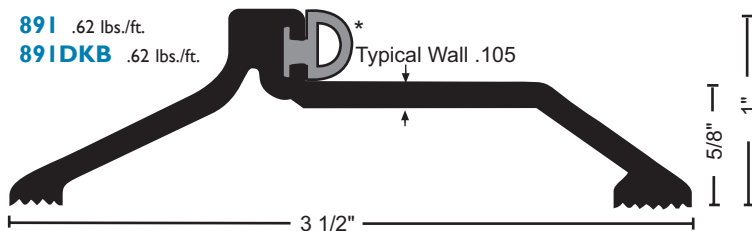

891 .62 lbs./ft.
891DKB .62 lbs./ft.

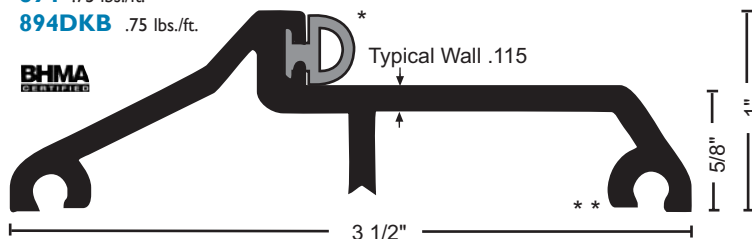

894 .75 lbs./ft.
894DKB .75 lbs./ft.



*** HD**
Bumper Seal
Seals against the door providing weather resistance
Vinyl ("V") supplied unless other material is specified
Options:
Neoprene ("N") 
Silicone ("S") 
Pile ("P")  **BHMA**

****** 
VINYL FOOT SEAL
used instead of caulking to increase the weather resistance of the threshold
Specify on order

FASTENERS
#10 x 1-1/2" FH zinc plated wood screws are included on mill finish thresholds.
Zinc plated antique bronze finish screws are provided to match DKB finish.