


INVERTED Y-BLADE LOUVER: 800 SERIES

L7

Inverted "Y" Blades Recommended for Schools, Class "A" and Institutional Buildings.



800A1 in Optional Stainless Steel Finish

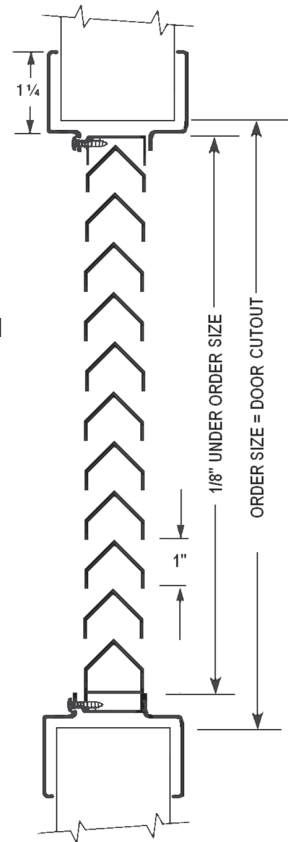

SPECIFICATIONS:

Material:	18 gauge CRS frame and blades. Min size 6" x 4", Max 48" x 80".
Construction:	Louvers: Inverted "Y" blades with 1" blade spacing are attached by interlocking construction to the 1" deep, welded frame. Non-vision. 800A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.
Door:	_____ 1-3/4" Any Style. Door cutout = order size. _____ 1 3/8"-1 3/4" - 800CORE, 800C, 800A.
Mounting Options:	_____ Select one mounting option from table below.
Fasteners:	Phillips head screws #8 x 3/4".
Powder Coat Finishes:	_____ (B) Mineral Bronze (std color) _____ (BK) Black _____ (FBK) Flat Black _____ (SA) Satin Aluminum _____ (SB) SC Beige _____ (GH) Gray Hammertone _____ (S) Sand _____ (AB) AMS Beige _____ (G) Gray (A1 stock color) _____ (W) White _____ (R) Red Color Samples Online.
Free Flow Area:	50% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	_____ (S) 18 gauge frame and 20 gauge stainless steel, #4 finish _____ 16 gauge CRS _____ (G) Galvanized sheet for exterior use and corrosion-resistance _____ (EG) Electro Galvanized for corrosion resistance & exterior use _____ Special order colors. Please provide color chip.
Fasteners:	_____ Torx _____ Hex head _____ Other: _____
Screen:	_____ 18x14 mesh insect screen installed in roll-formed aluminum frame _____ aluminum _____ bronze _____ fiberglass _____ stainless _____ Bird Screen.
Custom:	Custom sizes, other door thickness, other options; Contact Customer Service.

**STOCK ITEM— 800A1 IN STOCK FOR NEXT DAY SHIPMENT
IN 9 STANDARD SIZES FROM MOST WAREHOUSES**

Order Format: 800 _____
Example: 800AS1212 A,A1,CORE,C Option S,G,EG W H Color

DOOR MOUNTING OPTIONS - SELECT ONE	
800A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" door only.	
800CORE: Basic blade unit only; for interior door or as transom louver held in place with wood or metal moulding (furnished by others).	
800C: Basic blade unit with single flanged frame welded to face (corridor) side; for interior or exterior door; wood or metal moulding (by others) used on opposite side.	
800A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALSPDS1001
<p>HDQTRS:4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN</p>		