




ELECTRIFIED OUTSIDE TRIM

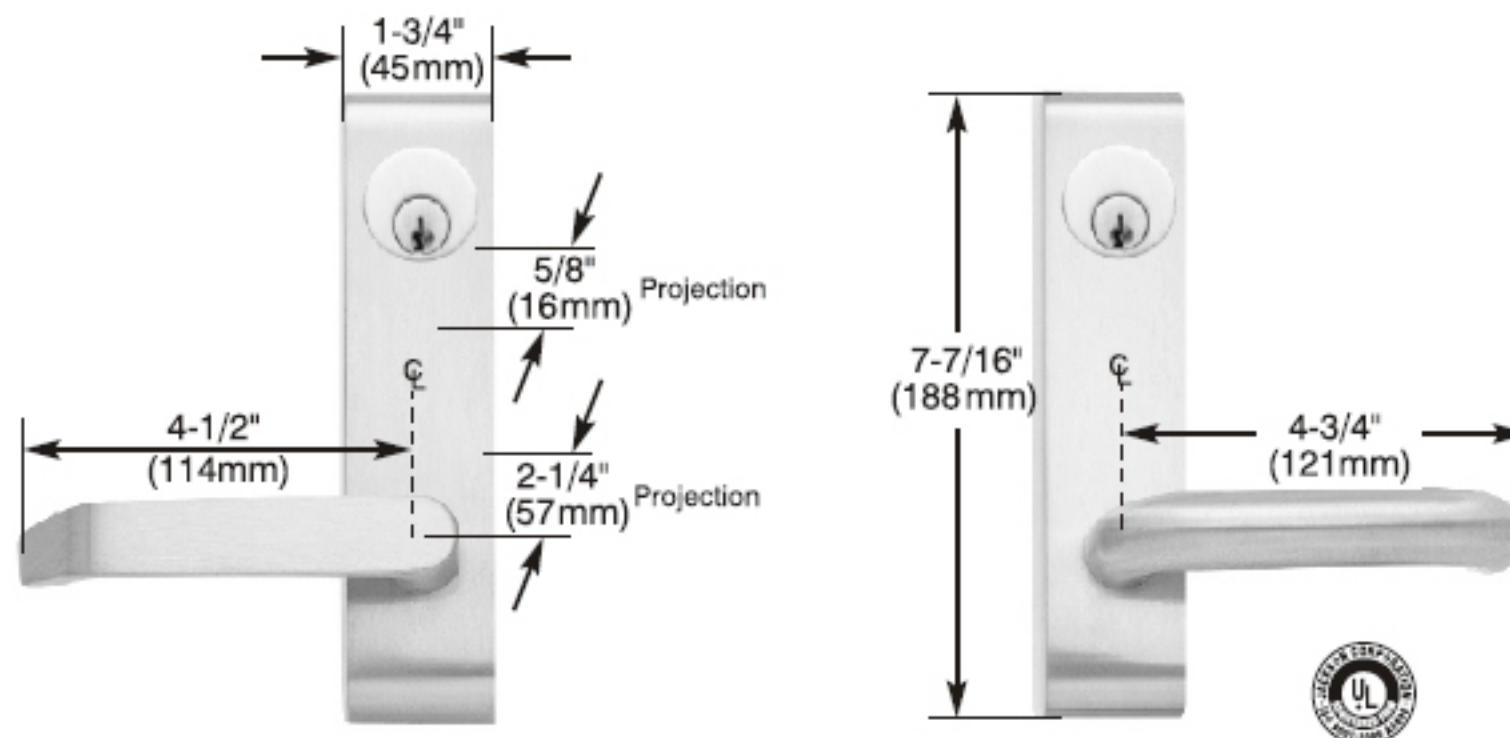

TECHNICAL INFORMATION

APPLICATIONS

- Key controlled outside trim is available for use with all Jackson Exit Devices. **(Excludes 1095)**
- Product is shipped for use with standard 1-3/4" (45mm) Thick Doors - 2" (51mm) Door Mounting is optional.

FEATURES

- Uses standard cylinder (Supplied by Others)
 - CVR Device: 1" (25mm) Mortise cylinder with MS type cam.
 - Rim Devices: 1" (25mm) Mortise cylinder with MS type cam.
- Non-Handed
- Thru-bolted with machine screws
- Available Trim Configuration:
 - Lever - Flat Style
 - Lever - Rounded
 - Matching Inactive Dummy Trim
- Electrified Trim (24 Volts, AC/DC)

MATERIALS

Escutcheon..... Extruded Aluminum
Lever Aluminum
Mechanical Components..... Plated Hardened Steel

FINISH

Standard Finished:
DBZ 313 - Anodized Dark Bronze
US28/628 - Anodized Satin Aluminum

ELECTRIC TRIM SPECIFICATIONS

TEMPLATE: Same as our Mechanical Trim

SOLENOID: Continuous Duty.....24 VDC
Current inrush requirements. (Approx. 0.25 Milliseconds) 0.25 amps.
Continuous holding (Approx. 300 milliamps) 0.30 amps.

WIRING RUN-DO NOT EXCEED MAXIMUM LENGTH

16 AWG.....80 FEET
14 AWG.....100 FEET
12 AWG.....120 FEET

PART #	FOR USE WITH MODEL
7500 EL-01 - Round	1275
7500 EL-02 - Flat	1275
8500 EL-01 - Round	12850, 2085, 2080
8500 EL-02 - Flat	12850, 2085, 2080
9500 EL-01 - Round	1295
9500 EL-02 - Flat	2095