


Automatic Door Bottoms - Heavy Duty Surface

- Use with a threshold for maximum sealing capability.
- Nylon brush recommended for carpet applications where no threshold is provided.
- Specify the exact net length required to avoid field sizing. Automatic Door Bottoms 36" and longer may be cut up to 4" in the field, under 36" should not be cut in the field, order net length.
- Minimum length 11", maximum length 60"
- End caps furnished standard

All products this page

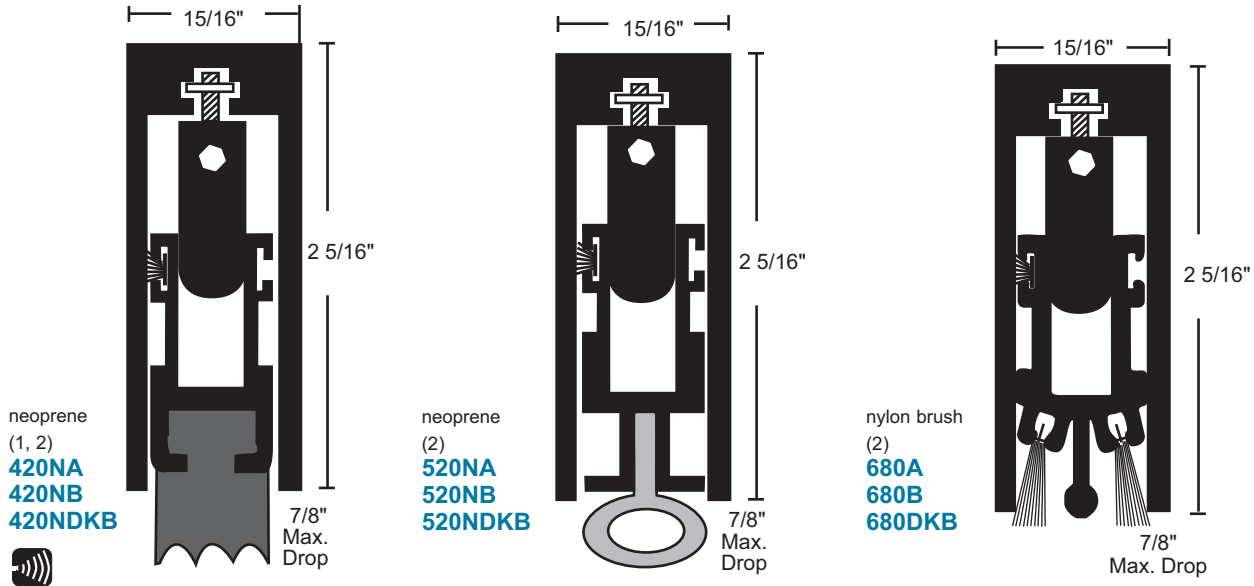

E-Z Touch

SURFACE

5/8"



The EZ-Touch door bottom requires only 3 to 5 pounds of pressure to activate.

Perfect for accessibility applications and still provides an effective seal.

Available 23 1/4" net to 48" in length.

End caps available - please specify

neoprene
223NA
223NB
223NDKB

silicone
223SA
223SB
223SDKB

Sliding or Pocket Doors Surface or Half Mortise - Heavy Duty

15/16"



Designed for use on sliding or pocket doors. A series of actuating bars keep the seal parallel to the sill or threshold until the door is in the closed position.

Available 11" to 144" in length.

End caps not available

neoprene (1)
421NA
421NB
421NDKB

1. Lead insert available for radiation shield - specify "lead-lined".
2. For half mortise applications specify HM in item number prior to finish (ie: 420NHMDKB).