

Scan for Latest
Price & Product
Updates



Innovative Access & Egress Solutions *for Building Security and Life Safety*



Price List 17.2

EFFECTIVE OCTOBER 1, 2012

ELECTRIC & MECHANICAL
ACCESS CONTROL HARDWARE



1	Warranty & Sales Policy
4	Warranty
4	Basic Component Considerations
4	Sales Policy
5	System Engineering
2	IP-based Access Control
7	IP Pro™ Series IP-based Access Control
3	Stand Alone Access Controls
9	918, 920 Keypads
10	923, 921P/924P Keypads
11	E70 Series EntryCheck™ Standalone Electronic Locksets (E75, E76, E77)
5	Electrified Cylindrical Locksets
14	7200 Electra™ Cylindrical Locksets
6	Electrified Mortise Locksets
16	7800 SELECTRIC® Mortise Lockset
18	7500 HiTower® Actuator Controlled Lockset
20	Field Electrification Kit for Schlage L9080
21	7000-DGK Door Core Drill Guide Kit
7	Exit Devices
22	S6000 Spectra™ Exit Device
23	Exit Device Trim
24	Exit Device: Electric Latch Retraction/Dogging
25	Exit Device: Delayed Egress
26	Exit Device: Electrified Mortise
27	Exit Device: Electric Dogging
28	Exit Device: Alarmed Exit
29	HiTower Pro® Electrified Mortise Exit Device
30	Exit Device Strikes
8	Electric Latch Retraction Kit
31	LR100K Field Retrofit ELR

9	Electric Strikes
35	15, 25 Strike
36	UniFLEX™ 45 Series Universal Strike
37	UniFLEX™ 55 Series Electric Strike
38	30 Rim Mount Electric Strike
10	Electric Bolt Locks
39	1091A, 1291A, 1190A, 2090A, PB2090A Narrow Mortise Bolt Locks
39	110, 210, 160, 260 Conventional Bolt Locks
40	180, 280 Surface Bolt Locks
11	Cabinet, Gate & Specialty Locks
41	295 Programmable Cabinet Lock, 290 Cabinet Lock
41	1583 Micro EMLock®
41	E300 Excel™ Value Series
42	PBD2090A PanicLok Exit Device Release
42	GL160A, GL260A Gate Locks
42	1591 Mortise EMLock®
43	1575/1576 Gate EMLock®
12	Magnetic Locks
44	350 Narrow Line EMLock®
45	E6200, E1200, E600 Excel™ Value Series
46	1510, 1570, 1580 EMLock Pro Series
48	Magnetic Lock Mounting Kits, Architectural Housings
49	Magnetic Lock Header Mounting Bracket
49	Magnetic Lock Universal & Concrete Mounting Brackets
49	Magnetic Lock AR Armature Mounting Bracket
50	Magnetic Lock Filler Plates, Angle Brackets
13	Magnetic Shear Locks
51	1561, 1562, 1565, 1566 Hi/Shear Concealed
52	1561S, 1561TJ, 1562SC Hi/Shear Surface
14	Delayed Egress Locks & Controllers
54	1511S/T Exit Check, Integrated
55	1581S Mini Exit Check, Integrated
56	101-DE Exit Check, Wall Mount Controller
57	Delayed Egress, Annunciators & Controls
15	Magnetic Door Holders
59	EH Magnetic Door Holder & Releasing Device



16 Power Supplies & Door Control Modules

- 61 621 Value Series Power Supplies
- 62 Power Supply
- 63 Door Control Modules
- 64 AC Transformers
- 65 Power Supply Lock Capacity Chart

17 Exit Sense Bars & Switch Bars

- 67 PSB560 Sure Exit® Sense Bar
- 67 MSB550 REX Switch Bar

18 Switch & Status Kits

- 68 500 Series Exit Device REX Switch Kits
- 68 MS Series Latch & Deadbolt Monitoring Strike Kits

19 Key Switches

- 69 700, 800 Key Switches

20 Exit Switches & Egress

- 71 400 Exit Switches
- 73 480 Bollards, Bollard Exit Switch Kits
- 76 491 & 492 Emergency Release
- 76 15 Under Desk Switch
- 76 400 Communicating Bathroom Controls
- 77 400 Wall Mount Station Control
- 77 DPS, MC Door Status Switches
- 77 10TD Mini Timer
- 77 MD-31 PIR Request-To-Exit

21 Power Transfer Devices

- 79 PTH Power Transfer Hinge
- 80 PT, PTM Power Transfer Hinges & Devices

22 Control Consoles

- 81 DT, TCC, RCC Control Consoles

23 Communicating Bathrooms, Mantraps & Interlocks

- 83 Communicating Bathroom
- 84 Interlock - Both doors normally unlocked
- 84 Mantrap - One door normally locked and one door normally unlocked
- 85 Mantrap - Both doors normally locked
- 85 Elevator Lobby Door System

24 Index

- 87 Quick Reference Chart

Some products in this price book are protected by one or more of the following U.S. Patents. Foreign Patents are not shown.: 4,021,065; 4,099,752; 4,596,411; 4,609,910; 4,623,178; 4,623,181; 4,634,155; 4,641,867; 4,826,223; 4,986,581; 5,000,497; 5,006,723; 5,033,779; 5,141,271; 5,376,910; 5,429,399; 5,525,880; 5,564,228; 5,876,073; 6,363,363; 6,363,763; 7,540,542; 7,614,669; 7,698,918



Over 200 Access Hardware products available for immediate shipping.

East & West coast warehouses reduced time-in-transit

- SDC - Camarillo, CA
- SDC - Baltimore, MD



Dealers & Installers:
Contact SDC to find out first hand which products your SDC distributor can expedite.



Scan QR Code to load ShipQuick Inventory list on your smartphone or visit at:

www.SDCSecurity.com/shipQuick

LIMITED WARRANTY

Security Door Controls (SDC) warrants that all new products sold by us are free from defects in material and workmanship and fit for the purpose intended by SDC when properly installed in accordance with the appropriate factory instructions and template for a period, from the date of shipment as follows:

Lifetime: EMLock Series electromagnetic locks and Exit Check Series Delayed Egress Electromagnetic Locks, excluding Exit Check delayed egress PC board assemblies, purchased since January 1, 2006 are warranted for the life of the product. Excel Series Electromagnetic Locks and 600 Series power supplies purchased since January 1, 2012 are warranted for the life of the product.

5 Years: All other SDC products, including Exit Check electronic PC Board Assemblies are warranted for 5 years

The extent of our liability for breach of warranty, when such is shown to our satisfaction, shall be limited to a functionally equivalent replacement, or repair of such product, or part thereof at SDC's sole discretion, when returned, delivery prepaid to SDC. We shall not, except to the extent this limitation may be precluded by law, be liable for inconvenience, labor costs, lost profit, damages to other property, injury or any other consequential or punitive damages resulting directly or indirectly from any product defect or breach of this warranty.

This warranty is limited to the original purchaser, is not transferable and shall not apply to changes of Oil Rubbed Bronze (613/US10B) finish, which is a living finish designed to change appearance through daily use, lamps, LED's, maintenance, wear and tear caused by normal use, altered product, abuse or negligence.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IS IN LIEU OF ALL OTHER WARRANTIES OF FITNESS AND MERCHANTABILITY.

SDC APP

Available on the
App Store

It's on
ANDROID



Mobile Resource

For Sales Calls, Onsite Installation, Dealers, Specifiers, & Engineers

20 Product Categories

Access Control Equipment
Electric & Mechanical Locking Devices

Video Library

Video Demos for Sales, Installations, Product & System Application

Document Library

PDF Datasheets, 3-Part Specs, Instructions, Templates & Cad

System Library

Cross Brand Compatible Riser & Point-To-Point System Wiring

Social Links

Latest News thru LinkedIn, Facebook, Twitter & YouTube

Print & Share

Print via WiFi or Bluetooth, Share Media Via Text or Email




Scan QR Code for
iPhone, iPad



Scan QR Code for
Android


BASIC COMPONENT CONSIDERATIONS FOR A SINGLE DOOR SYSTEM

- LOCKING DEVICE**
Electromechanical Bolt Lock
Electromagnetic Lock
Electric Strike
Electric Mortise Lock
Electrical Cylindrical Lock
Delayed Egress Lock
- ACCESS CONTROL**
Card Reader
Digital Keypad
Key Switch
- EXIT SWITCH**
Push Switch
Motion Detector
Request to Exit Push Bar®
- REMOTE CONTROL**
Desk Switch
Control/Monitoring Panel
(lock status sensors required)
- POWER SUPPLY AND DOOR CONTROL MODULE(S)**

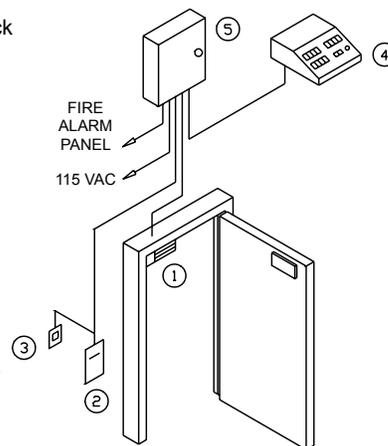

A 600 series power supply and time delay modules provide delayed re-locking, interface capability with alarm systems and access control components plus system documentation.

DOOR HANDS

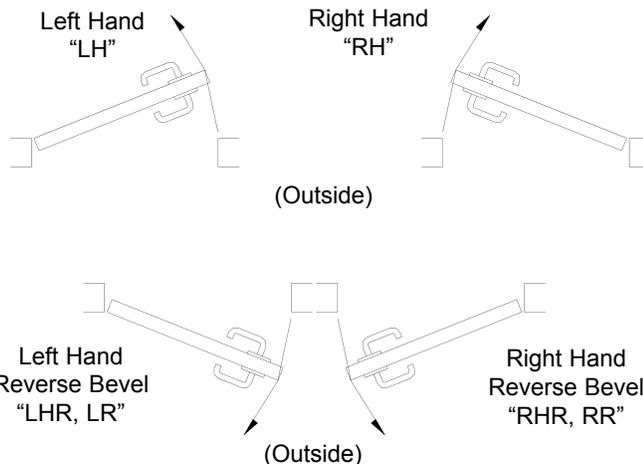

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012

SALES POLICY

TERMS: A minimum purchase of \$2500.00 annually is required to maintain an open account with Security Door Controls.

RETURNED GOODS: Any defects or errors for which we are responsible will be promptly rectified. Approval for return of merchandise must be requested of us, and when granted the return authorization number must be displayed on all packages returned. Material found suitable for resale without reconditioning will be credited to customer's account less a handling and reprocessing charge of 35% of the net material value. Further charges will be assessed on material requiring rework to return it to saleable condition. Obsolete products will not be accepted for return. Custom products, special finish, options, size or pre-assembly configuration are considered special and are not returnable for credit. Incoming transportation charges are to be prepaid by the Buyer. Credits for material returned will have 2% deducted to cover the cash discount allowance on the original invoice.

ADDITIONAL TERMS: 2% - TEN (10) DAYS. Net thirty (30) days from date of invoice. Interest at 1-1/2% per month will be charged on unpaid balances beyond thirty (30) days. Orders received from 60+ day accounts will not be entered until account is current. It is understood that you may use your normal purchase order or other order forms in placing orders. However any such forms shall be used for convenience only and any terms or provisions which may be contained therein inconsistent with, or in addition to, those contained in our then current Acknowledgment to Customer form or other terms or provisions contained herein shall have no force or effect whatsoever. Custom material or wiring diagrams requires 50% deposit. At SDC's discretion, orders in excess of \$1500 net will be acknowledged by product category and department, and shipped on an "as ready" basis unless customer purchase order specifically states "Do not ship before _____," and "No partial shipments."

PRICES: Prices are subject to change without notice. No prices are guaranteed. All shipments will be made at prices prevailing at time of shipment. Errors or omissions in pricing are subject to correction.

PRICING POLICY: Shipments must be accepted within sixty (60) days after receipt of the order. Contracts extending beyond this period are subject to prices in effect at the time of shipment.

MINIMUM ORDER: Our minimum net invoice charge is \$250.

ACCEPTANCE: We reserve the right to decline an order, in whole or in part, when the price, quantity or assortment of goods is not satisfactory to us.

NOTE: SDC complete sales policy as stated in our price book prevails at all times.

CUSTOM SYSTEM DESIGN

Security, Life-Safety and Access Control. They demand the best, in planning, products and operation. So it's only good sense to work with a complete product package, and to begin with an expertly prepared, custom engineered design package from SDC. Detailed to your needs, one entrance or a complex multi-entrance system.

Every professional in the field knows all too well the usual problems. Wiring specs and wiring diagrams don't match up, components are improperly planned out or missing, projects slow down and costs start escalating.

Security Door Controls is prepared to assist you with a complete System Design Folder which eliminates any problems with component compatibility, system operation or wiring installation.

We provide what your particular job requires in electrical drafts,

CHANGE IN ORDERS: A charge of \$20.00 will be applied to each change on any order after said original order has been previously acknowledged by SDC, plus a cost incurred by manufacturing at point of change.

CANCELLATIONS: A charge of \$40.00 will apply in addition to any cost incurred by us for any cancellation made after our acknowledgment is issued. Custom architectural housings are non-cancelable. Orders for custom architectural housings, custom parts, special and optional plated finishes are non-cancelable.

FREIGHT: All goods are invoiced EXW (EXWorks) SECURITY DOOR CONTROLS. When delivered to the transportation company the shipments become the property of the purchaser, who assumes the risk of loss or damage in transit. All ground shipments will be made by United Parcel Service (UPS).

BACK CHARGES: We are not responsible for, do not authorize, and will not accept any charges for the cost of any labor or material incurred by anyone other than Security Door Controls for any installation, repair, service or replacement unless incurred with our prior written consent and agreement.

PRODUCT CHANGES: SDC reserves the right to modify, change, or discontinue any components as required.

SHORTAGES/ DISCREPANCIES: Claims must be made within ten (10) days after receipt of material. (The original invoice number will be required).

TEMPLATES: It shall be the customer's responsibility to check all templates requested from SDC for suitability for proper door and frame preparation. Direct mail requests for the door and frame supplier will not release this customer of this responsibility. Duplicates will be mailed to distributors.

ARBITRATION AND GOVERNING LAW: In the event of a dispute or controversy, or differences, which may arise between parties, any claim shall be settled by arbitration. The arbitration shall take place in California under the rules of the American Arbitration Association. The validity, interpretation, and performance of this agreement shall be controlled by and construed under the laws of the state of California, United States of America.

ACCEPTANCE: We reserve the right to decline an order, in whole or in part, when the price, quantity, or assortment of goods is not satisfactory to us.

instructions and data. It offers a great advantage for you, with time saved, a faster, easier, better job in every way.

General instructions. Job name. Supplier. SDC reference number and drawing numbers for easy reference when technical support is needed. System operation: a detailed outline of the complete operation. A full list of components with individual instruction data for each, conduit layout indicating quantity and gauge of wires. Point-to-point wire diagrams of all component connections.

All necessary data is a matter of record. In short, whatever that job requires in equipment, technical understanding or assistance, at the office or in the field, will be detailed in your SDC System Design Folder.

*SDC fees vary according to requirements.

ENGINEERING POLICY

Engineering services are available for special system design and documentation.

All requests must be submitted in writing with all detailed requirements before final quotation. Any alterations or omissions must also be submitted in writing and are subject to additional quotation.

SDC assumes no responsibility for information exchanged by

telephone regarding estimates or product suitability for verbally expressed systems. Fax requests will speed up the process and eliminate misunderstandings.

A non-cancelable purchase order for engineering is required before any engineering may proceed.

A signed Engineering Policy form is required for all system drafts.




SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



Price List Effective October 1, 2012

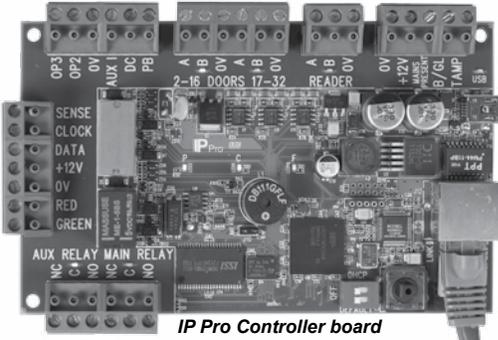

IP Pro Controller board



IP Pro Splitter



IP Pro Injector

FEATURES

- Controls one door directly, with multi-door expansion capabilities
- Password protected built-in web server (No separate software to install)
- Entry & exit reader capability
- Supports industry standard proximity, smart card, and multi-technology readers (Wiegand output)
- Compliant with PoE+ standard
- 15,000 users (up to 2 credentials per user)
- Internet Explorer, Firefox and Google Chrome browser support
- Batch card enrollment
- 250 User groups/Time Zones/Door Groups
- Audit Trail – Up to 5,000 events may be exported as a .csv file
- Anti-tailgating
- Door Status Monitoring Input
- Request-to-Exit (REX) Input
- Lock Relay Output

Controller with embedded software managed via web browser



NO SOFTWARE TO INSTALL

SPECIFICATIONS

IP Pro Controller

Voltage	12 VDC Input
Current Consumption (max)	250mA
Operating Temperature	14°F – 122°F (Indoor use only)
Dimensions	5.375" x 3.5" x 0.875" board only 9.25" x 6.5" x 2.1875" w/ ABS plastic enclosure
Weight	1lb

IP Pro Splitter

Input voltage	44 - 57 VDC
Input power	30W max
Output power	24W max
Output Current	2A @ 12V

Relay Output Type	Form C (SPDT) x 2
Relay Contact Rating	Main (Lock) – 5A @ 30VDC Auxiliary – 1A @30VDC
Connections	Digital Inputs: 4 dry contact inputs Ethernet: RJ45 RS-485 Terminal Bus Reader Power – 12VDC Reader Data – Wiegand (26bit to 37bit) Reader LED Control – Red & Green Two Solid State outputs (100mA max)

IP Pro Injector

PoE+ Output Pin	4/5 (+), 7/8 (-)
Assignment and Polarity	
Output Power Voltage	55Vdc
User Port Power	30Watts (Guaranteed)
Input Power	0.8A @ 100-240VAC



IP Pro Controller enclosure

IP Pro™ Starter Kit

IPPRO-SKE	IP Pro Starter Kit, including Controller board, Splitter, Injector plus Controller enclosure	1078.00
IPPRO-SK	IP Pro Starter Kit, including Controller board, Splitter, Injector	1053.00

IP Pro™ Components

IPDCE	IP Pro Controller, board plus enclosure	675.00
IPDC	IP Pro Controller, board only	650.00
IPI-30	IP Pro Injector, 30W PoE+	185.00
IPS-12	IP Pro Splitter, 12VDC PoE+	218.00

IP Pro™ Door Station

IPDSE	IP Pro Door Station Expansion, board plus enclosure	575.00
IPDS	IP Pro Door Station Expansion, board only	550.00

Prox Reader

IPRW	Wiegand Reader - PROX, HID compatible (125 kHz)	196.00
-------------	---	---------------



Wiegand Reader



SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



918/918W INDOOR EntryCheck™

Distributor Discount Code

JK LIST



918



500 user codes, 1 to 6 digits in length, 4 outputs, 2 relay and 2 solid state outputs timed or latching (on/off). Assign entry PIN's to relays 1 and/or 2. Tactile keys with selectable audible volume for key depression or output activation. LED Status: Access, lockout. Timed anti-passback. Keypad tamper lockout. Request-to-Exit/Enter input. Indoor blue backlit, moisture resistant keypad. Thick S.S. faceplate 3/32" (2mm).

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand

Current: 30mA typical, 150mA maximum - 60mA max for wiegand

Outputs (918): Relay 1 - SPDT 5 Amps @ 30VDC, Relay 2 - SPDT 2 Amps @ 30VDC, Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Dimensions: 3"W x 4-3/4"H x 1-1/2"D (1/4" wall projection)



918W



918 Stand alone digital indoor keypad **160.00**

918W Indoor digital keypad, Wiegand output **160.00**

SPECIFY FINISH

Add to List

U	630 Brushed Stainless Steel (standard)	N/C	H	613 Oil Rubbed Bronze	60.00
C	605 Bright Brass	60.00	P	625 Bright Chrome	60.00
D	606 Dull Brass	60.00			

OPTIONS

Add to List

TR12 Plug in power supply (optional) **72.00**
120 VAC primary, Output: 12VDC @ 1Amp, Secondary screw terminals with ground terminal



920/920P/920PW INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code

JK LIST



920



The 920 Series EntryCheck™ stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand

Current: 30mA typical, 150mA maximum - 60mA max for wiegand

Outputs (920/920P): Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)

Operating Humidity: 5% to 95% non-condensing

Housing: 3"W x 5-3/4"H x 1-7/16"D

920 Stand alone digital keypad **175.00**

920P Stand alone digital keypad with Prox Reader **390.00**

920PW Digital keypad with Prox Reader, Wiegand output **390.00**



920P



CARDS AND KEY FOBS

see page 3.13

ACCESSORIES

ADD to List


900-PS Privacy & Rain Shroud for stand alone digital keypads 918 and 920. Ensure protection from rain and security from spying eyes. **96.00**



900-PS with 920 Keypad



900-PS with 918 Keypad

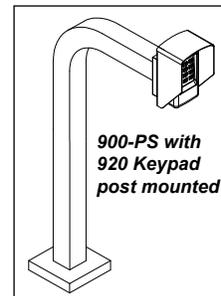

900-PS with 920 Keypad post mounted



920PW



Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com




3 - Access Control



923/923P/923PW NARROW INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code JK LIST

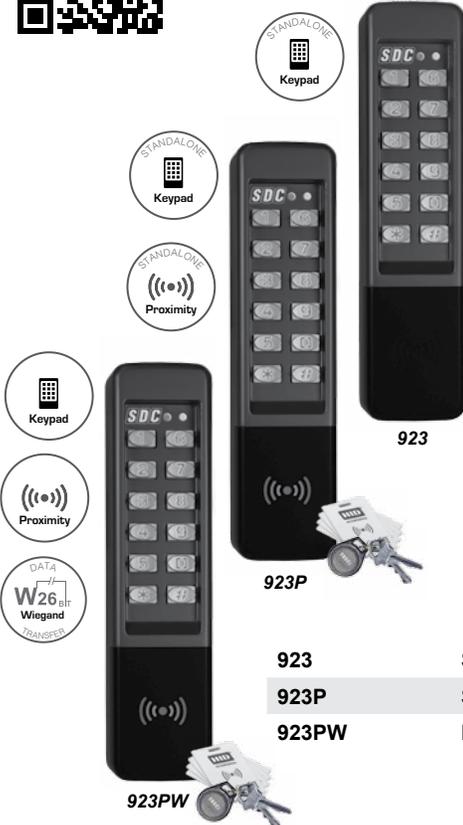

The 923 Series EntryCheck™ narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

- Voltage:** 12/24 VAC/DC — 5-16 VDC for wiegand
- Current:** 30mA typical, 150mA maximum - 60mA max for wiegand
- Outputs (923/923P):** Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
- Operating Temperature:** -20°F to + 130°F (-30°C to + 54°C)
- Operating Humidity:** 5% to 95% non-condensing
- Housing:** 1-3/4"W x 7-5/16"H x 1-3/8"D

923	Stand alone digital keypad, narrow	200.00
923P	Stand alone digital keypad, narrow, with Prox Reader	475.00
923PW	Digital keypad, narrow, with Prox Reader, Wiegand output	475.00

CARDS AND KEY FOBS

see page 3.13



921P/924P INDOOR/OUTDOOR 2-PIECE EntryCheck™

Distributor Discount Code JK LIST



The 921P and the 924P EntryCheck™ stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

- Voltage:** 12/24 VAC/DC
- Current:** 60mA typical, 150mA maximum
- Outputs:** Relay 1 - SPDT 5 Amps @ 30VDC
Relay 2 - SPDT 2 Amps @ 30VDC
Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
- Operating Temperature:** -20°F to + 130°F (-30°C to + 54°C)
- Operating Humidity:** 5% to 95% non-condensing
- Housing:** 921P: 3"W x 5-3/4"H x 1-7/16"D 924P: 1-3/4"W x 7-5/16"H x 1-3/8"D

921P	Stand alone, surface mount digital keypad, with Prox Reader and Controller	575.00
924P	Stand alone, surface mount digital keypad, narrow, with Prox Reader and Controller	600.00

CARDS AND KEY FOBS

see page 3.13



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012



E76 EntryCheck™ STANDALONE ELECTRONIC LOCKSET - SDC MORTISE LOCK

E76 EntryCheck™		LIST
E76K	Digital Keypad only, with mortise lock	1000.00
E76P	Digital Keypad with Prox Reader, with mortise lock	1200.00
E76PS	Digital Keypad with Prox Reader and Software, with mortise lock	1490.00

SPECIFY KEYPAD FINISH Add to List

Q	626 Dull Chrome (standard)	B	Black	N/C
---	----------------------------	---	-------	-----

SPECIFY LOCK HAND


L	Left hand	LR	Left hand reversed	All hands are field reversible	N/C
R	Right hand	RR	Right hand reversed	without disassembly	N/C

SPECIFY LOCK LEVER TRIM Add to List

G	Galaxy with rose	N/C	GE	Galaxy with escutcheon	100.00
E	Eclipse with rose	N/C	EE	Eclipse with escutcheon	100.00
N	Nova with rose	N/C	NE	Nova with escutcheon	100.00
07	Schlage equal with SDC B rose	N/C	07E	Schlage equal with SDC escutcheon	100.00

SPECIFY LOCK FINISH Add to List

Q	626 Dull Chrome (standard)	N/C	G	612 Dull Bronze	50.00	S	629 Bright Stainless Steel	50.00
C	605 Bright Brass	50.00	H	613 Oil Rubbed Bronze	50.00	U	630 Dull Stainless Steel	50.00
D	606 Dull Brass	50.00	P	625 Bright Chrome	50.00			
F	611 Bright Bronze	50.00						

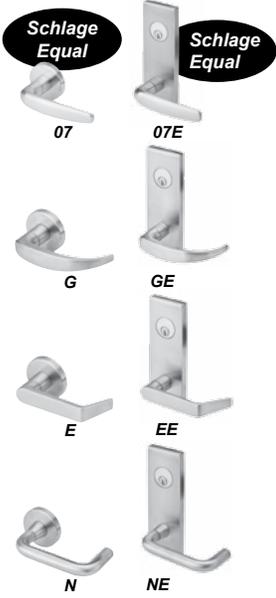

E77 EntryCheck™ STANDALONE ELECTRONIC LOCKSET - SDC RIM EXIT DEVICE

E77 EntryCheck™		LIST
E77K	Digital Keypad only, with SDC S6100 Exit Device	1400.00
E77P	Digital Keypad with Prox Reader, with SDC S6100 Exit Device	1600.00
E77PS	Digital Keypad with Prox Reader and Software, with SDC S6100 Exit Device	1890.00

SPECIFY KEYPAD FINISH Add to List

Q	626 Dull Chrome (standard)	B	Black	N/C
---	----------------------------	---	-------	-----

SPECIFY ELECTRIC TRIM Add to List

EK	Eclipse style electric trim less mortise cylinder, Stainless Steel Finish	N/C
GK	Galaxy style electric trim less mortise cylinder, Stainless Steel Finish	N/C

SPECIFY SPECTRA SERIES EXIT DEVICE Add to List

M61	Rim mount exit device	N/C
-----	-----------------------	-----

SPECIFY PANIC OR FIRE RATED Add to List

P	Panic exit device Mechanical Dogging STD; See part # CD for optional key cylinder dogging	N/C
F	Fire exit device Mechanical dogging not available	110.00

SPECIFY EXIT DEVICE FINISH Add to List

U	630 Dull Stainless Steel	N/C
---	--------------------------	-----

SPECIFY EXIT DEVICE LENGTH Add to List

36	For 36" Door	N/C	42	For 42" Door	20.00	48	For 48" Door	40.00
----	--------------	-----	----	--------------	-------	----	--------------	-------

3 - Stand Alone Access Controls



S6100 Rim Mount





SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



CARDS AND KEY FOBS

Distributor
Discount Code

MV

List

HID1326-25	HID ProxCard® II, 25 cards	160.00
HID1326-100	HID ProxCard® II, 100 cards	640.00
HID1346-10	HID ProxKey® II, 10 key fobs	130.00
HID1346-100	HID ProxKey® II, 100 key fobs	1280.00



ELECTRA MOD™ MAJOR BRAND LOCKS ELECTRIFIED BY SDC

Distributor Discount Code **LEK**



Schlage



Sargent



Best



Yale



Dorma

SDC's Electra™ Mod locksets ensure that the door stays latched even when unlocked, maintaining fire door integrity. The Electra™ Mod locksets comply with all national building and fire life safety code requirements for use on fire rated doors, including high-rise stairwell and elevator lobby doors where the use of electric strikes and magnetic locks is prohibited.

Features

- Outside lever normally locked, turning inside lever provides uninhibited egress
- Request-to-exit output optional with all locksets
- Dual Voltage 12 and 24VDC
- Choice of failsafe or failsecure operating mode

Specifications

Voltage: Dual 12/24VDC Input
Current: 600/300mA @ 12/24VDC
optional REX Output: SPDT 3 Amps @ 30VDC
Latchbolt: 1/2" throw

Backset: 2-3/4"
Strike: 4-7/8" ANSI A115.2
Door Thickness: 1-5/8" to 2-1/8"



Electrically Controlled Single Point Locks & Latches, 3 Hr A Label Fire Doors



HOW TO ORDER

DISTRIBUTOR SUPPLIED MECHANICAL LOCKSET SDC FACTORY ELECTRIFIED

LIST

Distributors to supply SDC with cylindrical lock for modification. SDC returns modified lock to distributor

S	Schlage	ND80PD	P	Yale	5405LN	160.00
T	Best	93K7D	D	Sargent	10G04	160.00
U	Dorma	C880	H	Hager	3480	160.00
		Failsafe		Failsecure		
Schlage		S7250		S7252		160.00
Yale		P7250		P7252		160.00
Best		T7250		T7252		160.00
Sargent		D7250		D7252		160.00
Dorma		U7250		U7252		160.00
Hager		H7250		H7252		160.00
REX option				request-to-exit output, SPDT, 3 Amps @ 30VDC		120.00

SDC SUPPLIED MECHANICAL LOCKSET

LIST

In Stock: Following SDC electrified locksets are in stock at both SDC east and west coast warehouses for shipment by the next business day.

Schlage Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZS7250ATHQ	ZS7252ATHQ	Athens	680.00
ZS7250SPAQ	ZS7252SPAQ	Sparta	680.00
ZS7250RHOQ	ZS7252RHOQ	Rhodes	680.00
ZS7250TLRQ	ZS7252TLRQ	Tubular	680.00
ZS7250OMEQ	ZS7252OMEQ	Omega	680.00

Sargent Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZD7250BQ	ZD7252BQ	B	780.00
ZD7250JQ	ZD7252JQ	J	780.00
ZD7250LQ	ZD7252LQ	L	780.00
ZD7250PQ	ZD7252PQ	P	780.00


Yale Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZP7250AUQ	ZP7252AUQ	Augusta	696.00
ZP7250MOQ	ZP7252MOQ	Monroe	696.00
ZP7250PBQ	ZP7252PBQ	Pacific Beach	696.00

Best Failsafe and Failsecure electrified locksets provided by SDC

SDC Failsafe	SDC Failsecure	Trim Type	
ZT725014Q	ZT725214Q	14	825.00
ZT725015Q	ZT725215Q	15	825.00
ZT725016Q	ZT725216Q	16	825.00

REX option request-to-exit output, SPDT, 3 Amps @ 30VDC 120.00

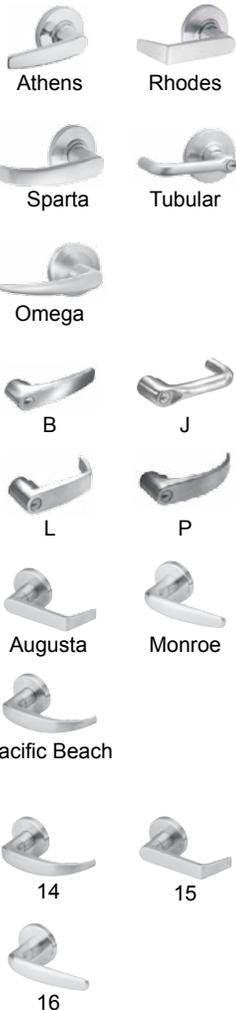



ELECTRA PRO™ SDC' Z7200 SERIES HEAVY DUTY CYLINDRICAL LOCKSETS

Distributor Discount Code **LEK**

Function: 7200 series locksets are locked on the outside and unlocked from the exterior by an access control or mechanical key. The inside lever is always operable for uninhibited egress.

Request-to-Exit Output: Standard with all SDC brand Z7200 locksets. SPDT, 3 Amps @ 30VDC

Features

- Choice of failsecure or failsafe mode
- Dual 12/24 VDC
- **REX** output: Z7200 **standard**
- 'C' type keyway, BEST IC core optional
- Independent lever power return springs
- Power Regulator Module included

Specifications

- Dual Voltage, 600/300 mA @ 12/24VDC
- Exceeds ANSI A156-2-4000 Grade 1
- 0.5625" latchbolt
- 2.75" Backset
- 4.875 strike ANSI A115.2
- Door thickness 1-3/4" to 2-1/8"



Electrically Controlled
Single Point
Locks & Latches,
3 Hr A Label Fire Doors



3773-0324-104



Price List Effective October 1, 2012

5 - Electrified Cylindrical Locksets



Electra Pro™ Z7250G



Electra Pro™ Z7250E



G Galaxy



E Eclipse



G5 Galaxy, I-Core prep



E5 Eclipse, I-Core prep



I-CORE

SPECIFY MODEL

LIST

Electra Pro™ Locks

Z7250	SDC Failsafe, with REX Output	Z7252	SDC Failsecure, with REX Output	420.00
--------------	-------------------------------	--------------	---------------------------------	---------------

SPECIFY LEVER TRIM

SDC Lever Trim

G	Galaxy	E	Eclipse	N/C
G5	Galaxy, I-Core prep	E5	Eclipse, I-Core prep	25.00

G5 and E5 I-Core prep without I-Core

SPECIFY FINISH

Add to List

Q	626 Dull Chrome (standard)	N/C		
C	605 Bright Brass	50.00	H	613 Oil Rubbed Bronze 50.00
D	606 Dull Brass	50.00	P	625 Bright Chrome 50.00

OPTIONAL CYLINDER and I-CORES

Add to List

SDC Conventional Cylinders (Schlage 'C' Keyway Standard)

6PKA	6 PIN Keyed alike	N/C	6PKD	6 PIN Keyed different (standard)	N/C
-------------	-------------------	------------	-------------	----------------------------------	------------

[IC] Interchangeable Core (Best 'A' Keyway Standard)

IC7P-KA	7 pin I-Core, small format, keyed alike	50.00	IC7P-KD	7 pin I-Core, small format, keyed different	50.00
----------------	---	--------------	----------------	---	--------------

OPTIONAL LATCH AND BACKSET ASSEMBLIES

B1	2-3/4" Backset latchbolt (Standard)	N/C		
-----------	-------------------------------------	------------	--	--

OPTIONAL STRIKE PLATES

ST1	ANSI 1-1/4" x 4-7/8" (Standard)	N/C	ST2	T-Strike with dust box, 1-1/8" x 2-3/4" MUST BE SPECIFIED	N/C
------------	---------------------------------	------------	------------	--	------------





SELECTRIC™ PRO Z7800 ELECTRIC LOCKSET

Distributor Discount Code **LSK**

SELECTRIC® PRO locksets incorporate an SDC manufactured Grade 1 Heavy Duty mortise lockset and vandal resistant clutch mechanism. Proprietary to SDC, SELECTRIC® PRO locksets. All operational attributes are field selectable. In addition, SELECTRIC® PRO locksets retrofit many other mechanical lock brands making them fully compatible with new and retrofit applications.

Field Selectable Attributes


- Selectable mode, failsafe or failsecure
- Selectable function, locked outside only or both sides
- Selectable voltage, 12 or 24VDC
- Selectable handing



Electrically Controlled
Single Point Locks or
Latches
3 Hr A Label Fire
Rated Doors



3773-0324:104



SPECIFY FUNCTION AND MODE

LIST

SDC Supplied Electrified Lock (Mortise cylinder not included). SDC Brand 7800 lockset. Clutch for lever trim vandal resistance. * Less trim - compatible with Schlage trim

		* Less Trim	With SDC Trim
Z7830	Locked both sides, failsafe. Field reversible to failsecure mode.	295.00	710.00
Z7850	Locked outside only, failsafe. Field reversible to failsecure mode.	295.00	710.00
Z7832	Locked both sides, failsecure. Field reversible to failsafe mode.	295.00	710.00
Z7852	Locked outside only, failsecure. Field reversible to failsafe mode.	295.00	710.00
Z7835	Locked outside and/or inside. Outside failsecure, inside failsafe	450.00	820.00

Voltage - Z7835 Only

Specify voltage for Z7835 function only. Leave blank for all other functions which are 12/24VDC, field selectable

12	12VDC	24	24VDC	N/C
----	-------	----	-------	-----

SPECIFY HAND

L	Left hand	LR	Left hand reversed	All hands are field reversible	N/C
R	Right hand	RR	Right hand reversed	without disassembly (exception Z7835)	N/C

SPECIFY FINISH

Add to List

Q	626 Dull Chrome (standard)	N/C	G	612 Dull Bronze	50.00	S	629 Bright Stainless Steel	50.00
C	605 Bright Brass	50.00	H	613 Oil Rubbed Bronze	50.00	U	630 Dull Stainless Steel	50.00
D	606 Dull Brass	50.00	P	625 Bright Chrome	50.00			
F	611 Bright Bronze	50.00						

SPECIFY LEVER TRIM

Add to List

G	Galaxy with rose	N/C	GE	Galaxy with escutcheon	100.00
E	Eclipse with rose	N/C	EE	Eclipse with escutcheon	100.00
N	Nova with rose	N/C	NE	Nova with escutcheon	100.00
07	Schlage equal with SDC B rose	N/C	07E	Schlage equal with SDC escutcheon	100.00

OPTIONS AND ACCESSORIES

Add to List

Optional Outputs

R	Request-to-exit. Indicates inside lever operation for access control request-to-exit input, alarm shunt, remote annunciation or CCTV activation, SPDT 5 Amp @ 30VDC	80.00
D	Door position status output. Indicates door open and door closed. SPDT 5 Amp @ 30VDC.	80.00
S	Latched & locked status output. Indicates door latched and locked and door unlocked. SPDT 5 Amp @ 30VDC	100.00

Optional Cable and Connectors

CC1-5	5ft. Cable and connectors for locks <u>without</u> optional outputs	45.00
CC3-5	5ft. Cable and connectors for locks <u>with</u> optional outputs	60.00

Optional Key Cylinders

1 required for 7850/7852	2 required for 7830/7832	30.00
--------------------------	--------------------------	-------

CYL-6KDQ 6 pin, 1.125" keyed different, 626 Dull Chrome

CYL-6KAQ 6 pin, 1.125" keyed alike, 626 Dull Chrome

Power Transfer Hinge


UL listed, 4.5", five knuckle hinge. Special finish available

PTH-4Q Four wire, dull chrome 150.00

PTH-10Q Ten wire, dull chrome 195.00

PTH-2+4Q 6-wire Electric Hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V 175.00

6 - Electrified Mortise Locksets

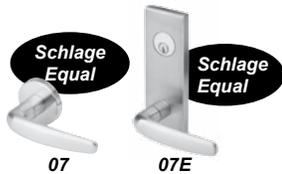

PTH

UL 10B Listed for 3Hr
Fire Rated Doors
See page



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



SELECTRIC™ MOD 7800 SERIES LOCKSETS



Distributor Discount Code **LSK**

Send the brand lockset of your choice to SDC for electrification. When factory authorized, distributors may take advantage of SDC's mechanical lock inventory to expedite orders. **SDC stocks Schlage, Corbin Russwin, Yale, Best and Sargent mechanical locks that may be electrified and charged to an order. Meanwhile, distributors may then send replacement mechanical locks to SDC for credit and SDC inventory replenishment.**

Features Schlage S and ZS only

- Field selectable failsafe / failsecure
- Field selectable function and handing without removing cover

Features All Other Brands

- Field selectable voltage, 12/24VDC
- Field selectable function and handing based on brand capability

SPECIFY BRAND MODEL

LIST

Distributors supply SDC with the mortise lock body and armored front (less trim) for modification. SDC returns the modified lock body. Upon installation, two lever return spring cages (supplied by distributor) are required for proper operation.

A Falcon - LM561/MA581	N Arrow - B12	U Dorma - M9000	160.00
D Sargent - 8204	P Yale - 8805	V Marks - 5EW	160.00
H Hager - 3880	S Schlage - L9080	W Cal Royal - M8080	160.00
I Corbin/Russwin - ML2055	T Best - 35HEW/45H	X PDQ - MR148	160.00

Note: Two locking hubs required for 7830 & 7832

Electrified lock chassis, less trim, provided by SDC factory are special order, no cancellation, no return.

ZS Schlage	ZN Arrow	ZD Sargent	ZT Best	POA
-------------------	-----------------	-------------------	----------------	------------

ZA Falcon	ZP Yale	ZI Corbin Russwin	NOTE: All locks supplied less cylinder
------------------	----------------	--------------------------	---

SPECIFY FUNCTION & ELECTRICAL MODE

Add to List

7830 Locked both sides, failsafe.	7832 Locked both sides, failsecure.	60.00
7850 Locked outside only, failsafe.	7852 Locked outside only, failsecure.	N/C

Schlage S and ZS only

- Field selectable failsafe / failsecure
- Field selectable function without removing cover

SPECIFY HAND

L Left hand	LR Left hand reversed	R Right hand	RR Right hand reversed	N/C
--------------------	------------------------------	---------------------	-------------------------------	------------

SPECIFY FINISH

Add to List

Q 626 Dull Chrome (standard)	N/C				
C 605 Bright Brass	50.00	G 612 Dull Bronze	50.00	S 629 Bright Stainless Steel	50.00
D 606 Dull Brass	50.00	H 613 Oil Rubbed Bronze	50.00	U 630 Dull Stainless Steel	50.00
F 611 Bright Bronze	50.00	P 625 Bright Chrome	50.00		

OPTIONS AND ACCESSORIES

Add to List


Optional Outputs

R Request-To-Exit. Indicates inside lever operation for access control request-to-exit input, alarm shunt, remote annunciation or CCTV activation, SPDT 5 Amp @ 30VDC Available with A, D, I, N, P, S, T, U, V and ZS only.	120.00
D Door Position Status Output Indicates door open and door closed. SPDT 5 Amp @ 30VDC Available with locks S and ZS only.	80.00
S Latched & Locked Status Output Indicates door latched and locked or door unlocked. SPDT 5 Amp @ 30VDC Available with locks S and SZ only.	100.00
L Latchbolt status. Indicates door latched and unlatched status. SPDT 5 Amp @ 30VDC Available with locks A, D, I, N, P, S, T, U, V and ZS only.	100.00


Consult factory for recent updates of option availability with any model

Optional Cable and Connectors

CC1-5 5ft. Cable and connectors for locks <u>without</u> optional outputs	45.00
CC3-5 5ft. Cable and connectors for locks <u>with</u> optional outputs	60.00

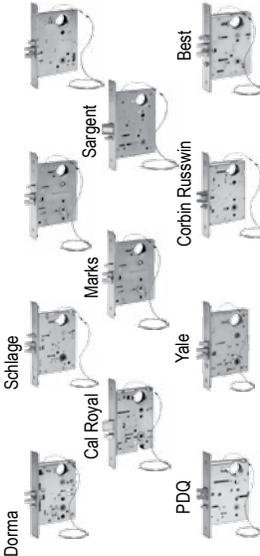

Electrically Controlled Single Point Locks or Latches
3 Hr A Label Fire Rated Doors



3773-0324:104



PTH
UL 10B Listed for 3Hr Fire Rated Doors
See page 79



HiTower – Electric Frame Actuator Controlled Locksets

The HiTower utilizes SDC's original concept of utilizing an electric frame actuator to control a mechanical lock in the door, eliminating the cost and labor associated with a power transfer hinge and wires through the door.

HiTower Z7500


- SDC brand Grade 1 Heavy Duty lockset
- Field selectable function, Locked outside only or both sides

HiTower Conversions

Distributors provide a new mechanical lock brand of choice to the factory for conversion to an electric frame actuator controlled lockset.



Electrically Controlled Single Point Locks or Latches
3 Hr A Label Fire Rated Doors

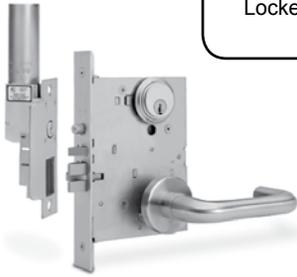

Z7500



SDC S6303FH



O7550 Yale Conversion

SPECIFY SOURCE OF MORTISE LOCK

HiTower® Pro - SDC supplied mortise lock and electric frame actuator, **complete with lever trim (Cylinder not included)**

Z SDC lockset **ZR** SDC Retrofit lockset, replaces discontinued 5000/6000 series

ZY SDC retrofit lockset replaces SDC modifications of discontinued manufacturer models: Falcon-LM581; Sargent-7704/7705; Corbin-9557L/2257; Russwin- 7059L; Arrow-1600EW; Yale-8705; Almet-5007; Best-35HEW

HiTower® Mod - SDC supplied Schlage mortise lock and electric frame actuator, **less lever trim**

ZS Schlage L9080

HiTower® Mod - Distributors supply SDC with the mortise lock body and armored front (less trim) for modification. SDC returns the modified lock body with an electric actuator. Upon installation, two lever return spring cages (supplied by distributor) are required for proper operation.

A Falcon*	LM-561/MA581	P Yale	8805
D Sargent	8204	R Schlage Retro	L9080 (replaces 5000 series)
H Hager	3880	S Schlage	L9080
I Corbin/Russwin	2057	T Best	35 HEW and 45H
N Arrow	B12	U Dorma	M9000
O Yale	7130F-L5 Exit device	V Marks	5EW

*All Falcon locks must be supplied with 0201000-000 face plate, less hub locking bar

SPECIFY FUNCTION

7530 Locked both sides. Unlocked by access control, remote control and key from either side, failsafe

7550 Locked outside only. Unlocked by access control, remote control, outside key and inside lever, failsafe

7560 Locked both sides. Unlocked by access control, remote control and key from either side, failsecure

7570 Locked outside only. Unlocked by access control, remote control, outside key and inside lever, failsecure

SPECIFY HAND

L Left hand **LR** Left hand reversed

R Right hand **RR** Right hand reversed

ACTUATOR VOLTAGE AND FRAME SIZE

Failsafe actuator for 1-3/4" to 2" face frames		Extra Narrow failsafe actuator for 1-1/4" to 1-1/2" face frames		+Failsecure actuator for 2" face frames	
A 115VAC 0.2 Amps	N/C	D 115VAC 0.2 Amps	120.00	G 115VAC 0.2 Amps	120.00
B 24VAC 0.5 Amps	N/C	E 24VAC 0.5 Amps	120.00	H 24VAC 0.5 Amps	120.00
C 24VDC 0.5 Amps	N/C	F 24VDC 0.5 Amps	120.00	J 24VDC 0.5 Amps	120.00

+ Fail Secure Actuator Available with Z or S lockset only. Special strike preparation required for S7560/7570.

SPECIFY FINISH

Q 626 Dull Chrome (standard)			
C 605 Bright Brass	50.00	G 612 Dull Bronze	50.00
D 606 Dull Brass	50.00	H 613 Oil Rubbed Bronze	50.00
F 611 Bright Bronze	50.00	P 625 Bright Chrome	50.00
		S 629 Bright Stainless Steel	50.00
		U 630 Dull Stainless Steel	50.00

SPECIFY LEVER TRIM FOR Z, ZR & ZY

G Galaxy with rose	N/C	GE Galaxy with escutcheon	100.00
E Eclipse with rose	N/C	EE Eclipse with escutcheon	100.00
N Nova with rose	N/C	NE Nova with escutcheon	100.00
07 Schlage style with SDC B rose	N/C	07E Schlage style with SDC escutcheon	100.00
12 Schlage style with SDC B rose	185.00	12E Schlage style with SDC escutcheon	265.00

6 - Electrified Mortise Locksets



G

GE



E

EE



N

NE



07

07E



12

12E



PRICING BY SOURCE AND FUNCTION

Distributor Discount Code **LK LIST**

HiTower® PRO Sources Z, ZR, ZY: SDC supplied - SDC lever trim, mortise lock and electric frame actuator. Schlage style lever trim 07 and 12 POA, consult factory for minimum qty.

SOURCE/FUNCTION			
Z7530	SDC	Failsafe, locked both sides with rose trim	705.00
Z7550	SDC	Failsafe, locked outside only with rose trim	695.00
Z7560	SDC	Failsecure, locked Both sides with rose trim	855.00
Z7570	SDC	Failsecure, locked outside only with rose trim	845.00
ZY7530	SDC	(Replaces discontinued lock models, see 18 for details) Failsafe, locked both sides with rose trim	705.00
ZY7550	SDC	(Replaces discontinued lock models, see 18 for details) Failsafe, locked outside only with rose trim	695.00
ZR7530	SDC	(Replaces 5000 series) Failsafe, locked both sides with rose trim	805.00
ZR7550	SDC	(Replaces 5000 series) Failsafe, locked outside only with rose trim	795.00
ZR7560	SDC	(Replaces 6000 series) Failsecure, locked both sides with rose trim	855.00
ZR7570	SDC	(Replaces 6000 series) Failsecure, locked outside only with rose trim	845.00
Extra Narrow Failsafe Frame Actuator			Add 120.00
(Actuator type D, E, F, only page 18) For 1-1/4" to 1-1/2" frames. Special strike prep required. Not available with ZR or failsecure 7560 and 7570			
Rose Trim			N/C
Escutcheon trim			Add 100.00

HiTower® MOD Source ZS (see 18) **Special order, no returns, no cancellation**
SDC supplied - Schlage L mortise lock and electric frame actuator, **less lever trim**

SOURCE/FUNCTION			
ZS7530	Schlage	Failsafe, locked both sides	POA
ZS7550	Schlage	Failsafe, locked outside only	POA

HiTower® MOD Sources A, D, I, N, O, P, S, T (see 18)
Distributor supplied - Major brand mechanical lock for modification, SDC supplied Electric frame actuator

SOURCE/FUNCTION			
A, D, H, I, N, O, P, S, T, U, V		Failsafe, locked both sides	480.00
7530			
A, D, H, I, N, O, P, S, T, U, V		Failsafe, locked outside only	445.00
7550			
S7560		Failsecure, locked both sides (5.75" Strike plate)	625.00
S7570		Failsecure, locked outside only (5.75" Strike plate)	615.00

HiTower® MOD Source R (see 18) Distributor supplied - Schlage L9080 mechanical lock for modification. SDC supplied - Electric frame actuator

SOURCE/FUNCTION			
R7530	(Replaces 5000 series)	Failsafe, locked both sides	530.00
R7550	(Replaces 5000 series)	Failsafe, locked outside only	500.00

Finish Add to List

Q	Dull chrome	N/C
All other finishes (see page 18)		Add 50.00

OPTIONS AND ACCESSORIES Add to List

Schlage style lever trim 07. Minimum quantity required, consult factory. POA

Lock status and wire harness		
L	Latch status switch, SPDT, 5 Amps @ 30VDC	60.00
S	Latch and deadlock status, 3 Amps @ 30VDC	100.00
SC-10	Socket connectors with 10 ft. cable, power wiring only	60.00
SC-10-5	Socket connectors with 10 ft. cable for power and options	60.00

Special Strikes
SSP Special retrofit strike plate 120.00

Specify extended lip strike in writing POA

Electrical back boxes for frame actuators with conduit knockouts:
(Recommended for new construction)

7500EB-S	For standard actuator in 1-3/4" or 2" face frame	30.00
7500EB-N	For narrow actuator in 1-1/4" or 1-1/2" face frame	30.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



6 - Electrified Mortise Locksets



SK-L90 Field Electrification Kit for Schlage L9000



LIST



SK-L90	Field Electrification Kit for Schlage L9000 Series	120.00
SK-L90-SC	Field Electrification Kit for Schlage L9080 (includes Springcage)	136.00
S7800-REX	Request-To-Exit kit for Schlage L9000 Series	120.00



SK-88 Field Electrification Kit for Yale 8805



LIST

SK-88	Field Electrification Kit for Yale 8805		120.00
LM-88	Field Latch Kit for Yale 8805		100.00



SK-82 Field Electrification Kit for Sargent 8206



LIST

SK-82	Field Electrification Kit for Sargent 8206		120.00
LM-82	Field Latch Kit for Sargent 8206		100.00



PTH SERIES POWER TRANSFER HINGE

Distributor Discount Code **LZK**

LIST



PTH x 5 Ft Cable

see page 79 for ordering information



F 10B Listed for 3hr Fire Rated Door



PTM HEAVY DUTY SERIES ELECTRIC POWER TRANSFER DEVICE

Distributor Discount Code **LZK**

LIST



NEW

see page 80 for ordering information



10B Listed For 3 Hrs Fire Rated Doors



HIGH IN-RUSH CONCEALED POWER TRANSFER DEVICE, UL LISTED

Distributor Discount Code **LZK**

LIST



see page 80 for ordering information



10B Listed For 3 Hrs Fire Rated Doors



DOOR CORE DRILL GUIDE

Distributor Discount Code **LZK**

LIST




The SDC 7000-DG Laser Guided Wire Raceway Drill Fixture enables wire raceway preparation through particle filled and solid wood doors. The door core wire raceway permits the installation and wiring of electrified locksets, exit devices and electric hinges.

The Laser Guided Wire Raceway Drill Fixture is easy to use without previous experience. The kit allows for drilling from the hinge side without removing the door from the frame.

The **7000-DGK** Kit includes: **Laser Guided Door Core, Raceway Fixture, 1/4" x 6" Pilot Drill Bit, 3/8" x 50" Door Raceway Drill Bit** (Custom designed evacuator drill bit tool sharpened with 1' extra long flutes), **Fiberglass Wire Running Kit** (Flexible acrylic end connection, Brass hook end for pulling, Brass eye end for pushing), **Door Wedge, Kit Carry Case**

7000-DGK	Laser door core drill guide Kit	500.00
7000-DB3/8	3/8" x 50" evacuator drill bit	75.00
7000-PD 1/4 X 6	1/4" x 6" pilot drill bit	24.00

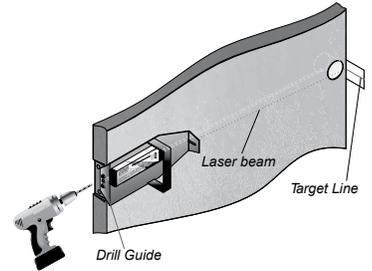

1/4 x 6" Pilot Drill Bit

3/8" x 50" Evacuator Drill Bit - Custom Designed for Door Raceways

Extra Long 1 Ft. Flute

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



6 - Electrified Mortise Locksets



SPECTRA™ S6000 TOUCH BAR EXIT DEVICES


Distributor Discount Code **XK**

Panic & Fire Rated Exit Devices ANSI / BHMA Grade 1

SDC S6000 Spectra™ series panic and fire rated exit devices are available in rim mount, mortise and surface vertical rod configurations. Spectra Class mechanical exit devices are UL listed and ANSI A156.3 Grade 1 compliant and comply with all national and state building and fire life safety codes.




- ANSI/BHMA A156.3-2001 Grade 1 Compliant
- Meets/Exceeds ADA requirements
- CA Title 19 Compliant
- UBC 97, Standard 7.2

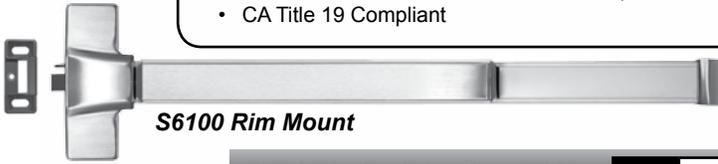

S6100 Rim Mount

SPECTRA SERIES EXIT DEVICE		LIST
S61	Rim mount exit device	600.00
S62	Surface vertical	900.00
S63	Mortise [03 Lever Trim included] - specify:	EE Eclipse Escutcheon 1100.00
		GE Galaxy Escutcheon 1100.00

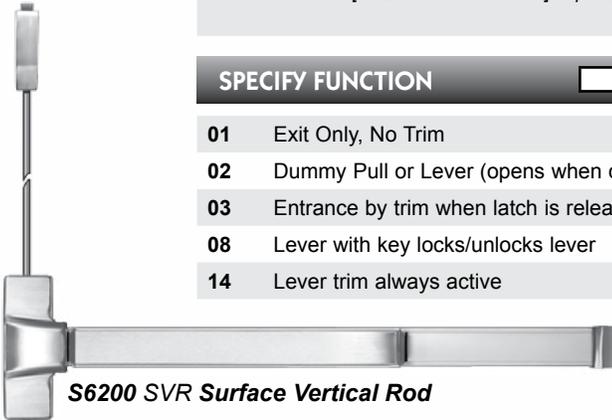

S6200 SVR Surface Vertical Rod

SPECIFY PANIC OR FIRE RATED		Add to List
P	Panic exit device Mechanical Dogging STD; See part # CD for optional key cylinder dogging	N/C
F	Fire exit device Mechanical dogging not available	110.00

SPECIFY HAND		N/C
RR	Right hand reverse bevel, RHRB	LR Left hand reverse bevel, LHRB

SPECIFY FINISH		Add to List
U	630 Dull Stainless Steel	N/C



S6300 Mortise

SPECIFY LENGTH		Add to List
36	For 36" Door N/C	42 For 42" Door 20.00
		48 For 48" Door 40.00

SPECIFY TRIM (S63 Mortise Only)		N/C
EE	Eclipse Escutcheon	GE Galaxy Escutcheon

SPECIFY OPTIONS		Add to List
-----------------	--	-------------

R	Request-To-Exit Output, SPDT	80.00	L	Latch Status Output, SPDT	80.00
----------	------------------------------	--------------	----------	---------------------------	--------------

For 62 Series devices only:

LBR	Less Bottom Rod, for Panic Devices	N/C	LBRF	Less Bottom Rod, for Fire Rated devices	N/C
------------	------------------------------------	------------	-------------	---	------------



S6200-LBR SVR



EK Eclipse

Standard Active and Dummy Trim

SPECIFY TRIM Rim and Vertical Rod		Add to List
-----------------------------------	--	-------------

<i>Standard Trim</i>		
EK Eclipse	GK Galaxy	225.00
SP Saturn		100.00



GK Galaxy

SPECIFY TRIM FUNCTION		Add to List
-----------------------	--	-------------

Exit Only	CP01	N/C
Dummy Trim	EK02, GK02, SP02	N/C
Key Retracts Latchbolt	EK03, GK03, SP03	N/C
Key Locks/Unlocks Lever	EK08, GK08	N/C
No Cylinder Lever Always Active	EK14, GK14	N/C



SP Saturn

SPECIFY TRIM FINISH		Add to List
---------------------	--	-------------

U 630 Dull Stainless Steel	N/C
-----------------------------------	-----



EKE Eclipse

OPTIONS		Add to List
---------	--	-------------

- Rim cylinder required for 03 functions
- Mortise cylinder required for 08 functions and GKE03, EKE03.
- 1 key cylinder required for CD option

CD	Keyed dogging (Specify key cylinder separately) (not available with (F) fire exit device)	20.00
CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	30.00
CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	30.00
RIM-CYL-03U	Rim Cylinder, keyed different	50.00



GKE Galaxy

ELECTRIC TRIM OPTIONS FOR SDC 6000 SERIES		Add to List
---	--	-------------

Features

- Failsecure, field reversible to failsafe
- 4 ft cable and connectors
- 600/300 mA @ 12/24VDC

EKE03	Eclipse style electric trim less mortise cylinder, Stainless Steel Finish	675.00
GKE03	Galaxy style electric trim less mortise cylinder, Stainless Steel Finish	675.00
Electric Trim Options		
LS	Locked/unlocked status, SPDT 3 Amp contact	80.00

OPTIMAL DOOR STRIKES

List



ST2DF 48.00
Optional for pairs of doors with rim mount device.

Projection: 1-15/16" (49mm)



68.00
Optional for mullion application

ST1MP For 6100P **ST1MF For 6100F**
Projection: 7/8" (22.5mm)

REMOVABLE MULLION

List



KR90F 650.00
Standard Key Removable Mullion
For Panic Exit and Fire Exit Rim Mount Devices.
Length: 8ft
Material: 2" 11 Gauge Steel Tube
Finish: Primer gray

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



7 - Exit Devices

Momentary or maintained latch bolt and push pad retraction, with simultaneous dogging.
Automatic re-triggering of latch retraction
Voltage: 24VDC @ 700 mA activation, 200 mA continuous



Rim Mount



Mortise




Vertical Rod




EE



GE



E



EM

SDC 600 Series Power Supply



PTM Series



PTH x 5 Ft Cable



602RF (shown)

600 Series Power Supply

SPECIFY DEVICE **LIST**

S61	Rim mount exit device	600.00
S62	Surface vertical	900.00
S63	Mortise [03 Lever Trim included] - specify: EE/GE Eclipse Escutcheon/Galaxy Escutcheon	1100.00

SPECIFY FUNCTION **Add to List**

01	Exit Only	02	Dummy	03	Nightlatch	N/C
-----------	-----------	-----------	-------	-----------	------------	------------

SPECIFY PANIC OR FIRE RATED

P	Panic	N/C	F	Fire	110.00
----------	-------	------------	----------	------	---------------

SPECIFY HAND (Mortise Only)

RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB	N/C
-----------	--------------------------------	-----------	-------------------------------	------------

SPECIFY FINISH

U	630 Dull Stainless Steel	N/C
----------	--------------------------	------------

SPECIFY LENGTH

36	For 36" Door	N/C	42	For 42" Door	20.00	48	For 48" Door	40.00
-----------	--------------	------------	-----------	--------------	--------------	-----------	--------------	--------------

SPECIFY ELECTRIC LATCH RETRACTION

E	Dual Electric Latch Retraction and Dogging	700.00
EM	External Module Dual Electric Latch Retraction/Dogging	750.00

SPECIFY TRIM (Mortise Only)

EE	Eclipse Escutcheon	GE	Galaxy Escutcheon	N/C
-----------	--------------------	-----------	-------------------	------------

Specify Trim for S61 and S62 - See page 23

SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see pages 79 and 80) **LIST**

PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV, Aluminum Powder Coat, US28 equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC, Aluminum Powder Coat, US28 equivalent	358.00
PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	195.00

SPECIFY POWER SUPPLY (For the entire line of Power Supplies, see page 62) **LIST**

602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	260.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	350.00
EMC	Sequencer Module (For other Modules and pairs of doors see page 63)	150.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012




When energized by optional built-in (KS) or remote switch, manual depressing the pushpad causes the pushpad and latch to remain retracted (unlocked) providing push-pull door operation. When de-energized or signaled by a fire alarm, the pushpad and latch are released.
Voltage: 12/24VDC @ 170/100 mA



Rim Mount



Mortise

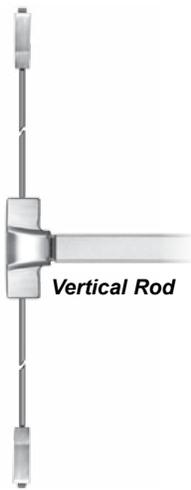

Vertical Rod



EE

GE



PTM Series



PTH x 5 Ft Cable



602RF (shown)

600 Series Power Supply

SPECIFY DEVICE **LIST**

S61	Rim mount exit device	600.00
S62	Surface vertical	900.00
S63	Mortise [03 Lever Trim included] - specify: EE/GE Eclipse Escutcheon/Galaxy Escutcheon	1100.00

SPECIFY FUNCTION **Add to List**

01	Exit Only	02	Dummy	03	Nightlatch	N/C
-----------	-----------	-----------	-------	-----------	------------	------------

SPECIFY PANIC OR FIRE RATED

P	Panic	N/C	F	Fire	110.00
----------	-------	------------	----------	------	---------------

SPECIFY HAND (Mortise Only)

RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB	N/C
-----------	--------------------------------	-----------	-------------------------------	------------

SPECIFY FINISH

U	630 Dull Stainless Steel	N/C
----------	--------------------------	------------

SPECIFY LENGTH

36	For 36" Door	N/C	42	For 42" Door	20.00	48	For 48" Door	40.00
-----------	--------------	------------	-----------	--------------	--------------	-----------	--------------	--------------

SPECIFY ELECTRIC DOGGING

G	Electric Dogging	450.00
----------	------------------	---------------

Options

KS	Built-in key switch	80.00
L1	Dogged Status Indicator, less cylinder, green = dogged (unlocked)	36.00

SPECIFY TRIM (Mortise Only)

EE	Eclipse Escutcheon	GE	Galaxy Escutcheon	N/C
-----------	--------------------	-----------	-------------------	------------

Specify Trim for S61 and S62 - See page 23

SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see pages 79 and 80) LIST

PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV, Aluminum Powder Coat, US28 equivalent	358.00
PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00

SPECIFY POWER SUPPLY (For the entire line of Power Supplies, see page 62) LIST

602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	260.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	350.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com



7 - Exit Devices



- LED (field selectable Active or Off) Bypass - No LED Armed - Blinks every 4 seconds (Green when armed, Red when in alarm mode)
- Low Battery Alert – Siren will beep every 45 seconds.
- 15 or 60 second arming delay
- Remote status output
- Field selectable alarm modes include:
 - › Continuous alarm with manual key reset
 - › Alarm automatically rearms 2 minutes after door closes and may be retriggered. May be manually rearmed by key before automatically rearmed.




Rim Mount

SPECIFY DEVICE		LIST
S61	Rim mount exit device	600.00
S62	Surface vertical	900.00
S63	Mortise [03 Lever Trim included] - specify: EE/GE Eclipse Escutcheon/Galaxy Escutcheon	1100.00



Mortise

SPECIFY FUNCTION		Add to List
01	Exit Only	03 Nightlatch N/C

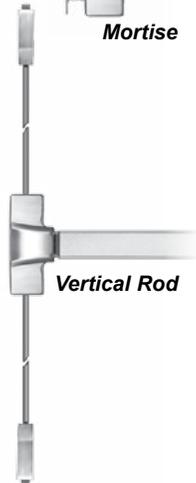

Vertical Rod

SPECIFY PANIC OR FIRE RATED		
P	Panic	N/C F Fire 110.00

SPECIFY HAND (Mortise Only)		
RR	Right hand reverse bevel, RHRB	LR Left hand reverse bevel, LHRB N/C

SPECIFY FINISH		
U	630 Dull Stainless Steel	N/C

SPECIFY LENGTH		
36	For 36" Door N/C	42 For 42" Door 20.00 48 For 48" Door 40.00

SPECIFY EXIT ALARM		
A	Exit Alarm, 9V Battery Powered	400.00
B	Exit Alarm with 12/24V AC/DC input (9V battery provides power backup)	440.00

Options

AR6	6 or 10 minute alarm with auto rearm and manual key reset.	AR20 20 minute alarm with auto rearm and manual key reset
------------	--	--

AD1 1 second arming delay



EE

GE

SPECIFY TRIM (Mortise Only)		
EE	Eclipse Escutcheon	GE Galaxy Escutcheon N/C

Specify Trim for S61 and S62 - See page 23

SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see pages 79 and 80) **LIST**

PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV, Aluminum Powder Coat, US28 equivalent	358.00
PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair, 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00

SPECIFY POWER SUPPLY FOR EXIT ALARM MODEL B (For the entire line of Power Supplies, see page 62)

602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	260.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	350.00

PTM Series

PTH x 5 Ft Cable

602RF (shown)



600 Series Power Supply

7.23



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdssecurity.com • www.sdssecurity.com


Price List Effective October 1, 2012



Electric Frame Actuator Controlled Exit Device

Features

- Fire rated exit device
- Failsafe, unlocks by access control, power loss or signal from fire command center
- For use with fire rated exit and stairwell doors
- Door stays latched even when unlocked
- All wiring maintained in the strike jamb
- Complies with all national codes
- No power transfer hinge

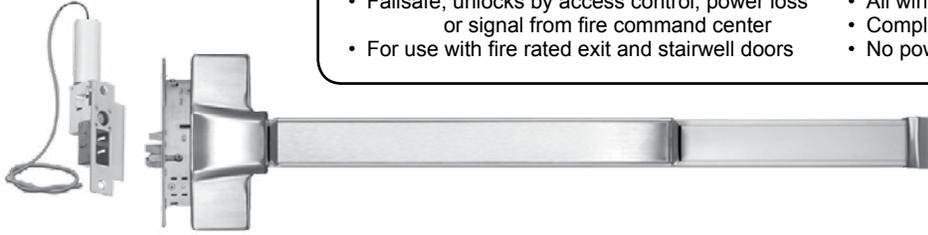

See SDC power supplies with fire command interface for emergency release of exit device

SPECTRA SERIES EXIT DEVICE **LIST**

S6303FH	Fire rated mortise exit device with electric frame actuator, key retracts latch	1855.00
----------------	---	----------------

ACTUATOR VOLTAGE AND FRAME SIZE **Add to List**

Failsafe actuator for 1-3/4" to 2" face frames		Narrow failsafe actuator for 1-1/4" to 1-1/2" face frames	
A	115VAC 0.2 Amp	N/C	
B	24VAC 0.5 Amp	N/C	
C	24VDC 0.5 Amp	N/C	
D	115VAC 0.2 Amp		120.00
E	24VAC 0.5 Amp		120.00
F	24VDC 0.5 Amp		120.00

SPECIFY HAND **LIST**

RR	Right hand reverse bevel, RHRB	LR	Left hand reverse bevel, LHRB	N/C
-----------	--------------------------------	-----------	-------------------------------	------------

SPECIFY LENGTH **Add to List**

36	For 36" Door (std)	N/C		
42	For 42" Door	40.00	48	For 48" Door 80.00

SPECIFY HEAD COVER & PUSH PAD FINISH **Add to List**

Push bar base finish anodized aluminum	
U	630 Dull Stainless Steel (std) N/C

OPTIONAL STATUS OUTPUTS **Add to List**

L	Latch position status output, SPDT, 3 Amp	60.00
S	Latch & deadlocked status output, SPDT, 3 Amp	100.00
SC10	Socket connectors with 10ft. cable, power wiring only	60.00
SC10-5	Socket connectors with 10ft. cable for power and options	60.00

SPECIFY TRIM **LIST**

EE03	Eclipse x Escutcheon	GE03	Galaxy x Escutcheon	NE03	Nova x Escutcheon	N/C
E03	Eclipse	G03	Galaxy	N03	Nova	N/C

SPECIFY TRIM FINISH **Add to List**

U	630 Dull Stainless Steel (std) N/C
----------	---

KEY CYLINDERS AND OPTIONAL HARDWARE **Add to List**

CYL-6KDQ	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	30.00
CYL-6KAQ	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	30.00



NE03 Nova



EE03 Eclipse



GE03 Galaxy



G03 Galaxy



E03 Eclipse



N03 Nova

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



7 - Exit Devices

RIM DEVICES STANDARD STRIKES

SURFACE / Standard VERTICAL ROD DEVICES Strike

Rim Strikes List



ST1P
Standard for S6100P
Projection: 13/16" (21mm)



ST1F
Standard for S6100F
Projection: 13/16" (21mm)

Optional Mullion Strike List




Optional for mullion application

ST1MP For 6100P
ST1MF For 6100F
68.00
Projection: 7/8" (22.5mm)

Top Strikes List



ST2P
Standard top strike for S6200P
Projection: 29/32" (23mm)



ST2F
Standard top strike for S6200F
Projection: 1-1/8" (29mm)

Bottom (Floor) Strikes List



ST28P
Standard floor strike for S6200P



ST28F
Standard floor strike for S6200F
Mortise: 2-1/4" (57mm)

Optional Threshold Strikes List



ST28T **14.00**
Optional floor strike for using threshold openings
Projection: 3/8" (9.5mm)

see pages 24 through 29 for electrical options

MORTISE STRIKE List



For use on 1-3/4" standard or 2-1/4" thick single door, and 2-1/4" double door with overlapping astragal and coordinator

ST3F Standard for S6300F
ST3P Standard for S6300P

OPTIONAL DOUBLE DOOR STRIKE List



ST2DF **48.00**
Optional for pairs of doors with rim mount device.
Projection: 1-15/16" (49mm)

REMOVABLE MULLION List



KR90F **650.00**
Standard Key Removable Mullion
For Panic Exit and Fire Exit Rim Mount Devices.
Length: 8ft
Material: 2" 11 Gauge Steel Tube
Finish: Primer gray






SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



SDC Factory Installed Kits are UL Listed and Field Retrofit Kits are UL Classified
For use with 3Hr fire rated and non-fire rated mechanical exit devices.
Only 700mA inrush / 200mA continuous @ 24VDC provides simultaneous latch retraction, dogging with pushpad depression unless specified otherwise.

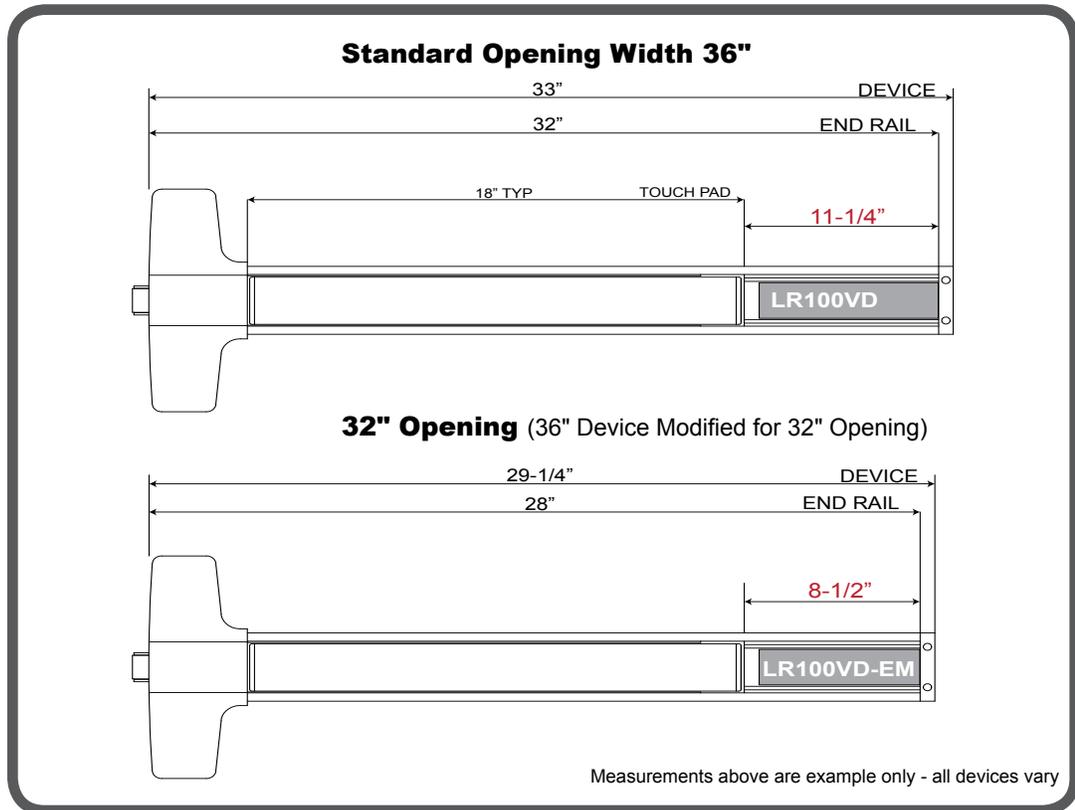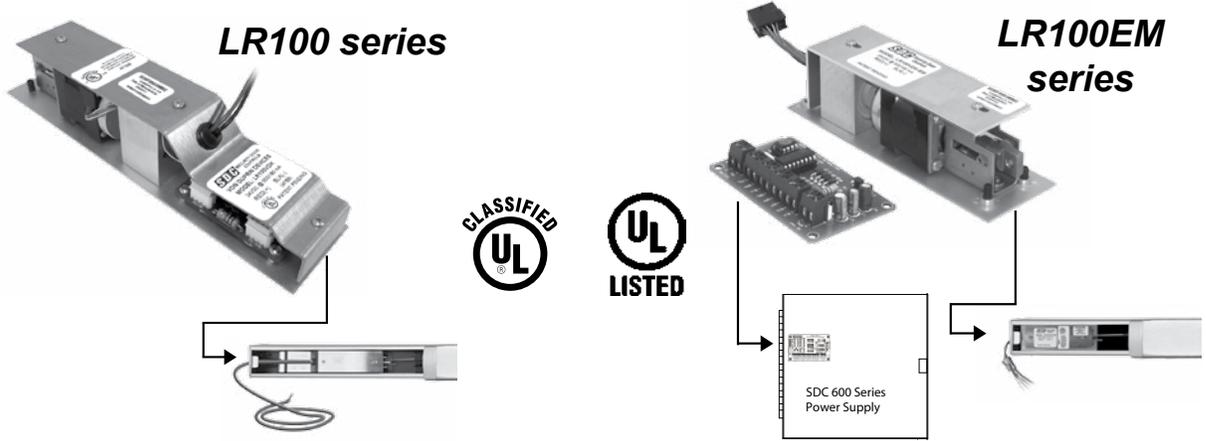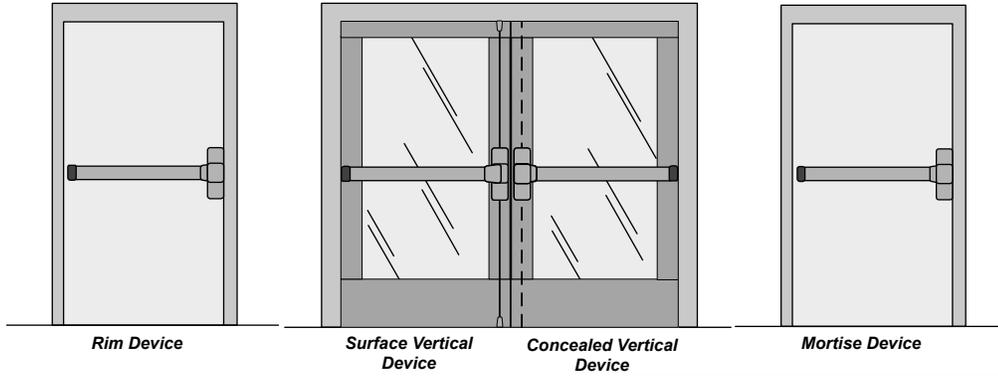

Measurements above are example only - all devices vary

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





602RF
see page 62



PTH-4Q
see page 79



PTM
see page 80



400NU-L2
see page 77

ACCESSORIES		List
602RF	1 Amp Power Supply, UL Listed 294, for 1 or 2 exit devices	260.00
632RF	2 Amp Power Supply, UL Listed 294 for 3 or 4 exit devices	400.00
EMC	2 Station Automatic Door Sequence; Each EMC provides interface and sequencing for two single or one double automatic door.	150.00
PTH-4Q	4-wire Electric Hinge, 1 Amp max. UL 10B	150.00
PTH-4QDPS	4-wire, Electric Hinge 1 Amp max. UL 10B. With concealed Door Status Contact	200.00
PTH-2+4Q	6-wire Electric Hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V	175.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge, 1 Amp @ 12/24V per pair	195.00
PT-5	Concealed mortise power transfer device, UL 10B Fire Door Accessory	60.00
PT-3V	Stainless steel door loop with surface wire junction	45.00
PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DC, Aluminum Powder Coat, US28 equivalent	358.00
PTM-2BZ	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DC, Dark Brown Powder Coat, US10B equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC, Aluminum Powder Coat, US28 equivalent	358.00
PTM-10BZ	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC, Dark Brown Powder Coat, US10B equivalent	358.00
400U-L2	Two LEDs. Specify lens color. Standard Finish, on 1 Gang plate	45.00
400NU-L2	Two LEDs. Specify lens color. Standard Finish, on narrow plate	45.00

Adams Rite Exit Device				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100ARK	550.00	LR100AR	600.00
Models				
Rim Mount		8700 / 8800 / 3700		
Surface Vertical Rod		8100 / 8200 / 3100		
Concealed Vertical Rod		8600 / 3600		

* Note: Retracts only the latch

Arrow 1000 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36" - 48"	LR100AWK	550.00	LR100AW	600.00
Models				
Rim Mount		S1250		
Surface Vertical Rod		S1150		

Cal-Royal Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100CAK	550.00	LR100CA	600.00
Models				
Rim Mount		7700 / F7700		
Surface Vertical Rod		7760 / F7760		

Corbin Russwin ED Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100CRK	550.00	LR100CR	600.00
42" - 48"	LR100CRK-42/48	600.00	LR100CR-42/48	650.00
Models				
Rim Mount		ED5200 / ED4200		
Surface Vertical Rod		ED5400		
Concealed Vertical Rod		ED5800		

Options		
LRCR1L	Latch Status Kit	100.00
LRCR1R	Pushpad/Dogging Status or REX Status Kit	100.00

* Note: Retracts only the latch

Design Hardware Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36" - 48"	LR100DHK	550.00	LR100DH	600.00
Models				
Rim Mount		1000R		
Surface Vertical Rod		1000V		



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012

Detex Exit Device				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100DXK	550.00	LR100DX	600.00
Models				
Rim Mount	10 / 40 Series			
Surface Vertical Rod	20 / 50 Series			
Concealed Vertical Rod	80 / 60 Series			

Dorma Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100DAK	550.00	LR100DA	600.00
Models				
Rim Mount	9300			
Surface Vertical Rod	9400			

Falcon 24/25 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100FRK	550.00	LR100FR	600.00
Models				
Rim Mount	25-R / F-25-R / 24-R / F-24-R			
Surface Vertical Rod	25-V / F-25-V / 24-V / F-24-V			
Concealed Vertical Rod	25-C / F-25-C / 24-C / F-24-C			

Falcon Dor-O-Matic Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100FAK	550.00	LR100FA	600.00
Models				
Rim Mount	1790			
Concealed Vertical Rod	1690			
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100DMK	550.00	LR100DM	600.00
Models				
Rim Mount	1590			
Concealed Vertical Rod	1490			

Hager 4500 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100HK	550.00	LR100H	600.00
30"	LR100HEM	600.00	LR100HEM	650.00
Models				
Rim Mount	4501 - Rim			
Surface Vertical Rod	4501 - SVR			
Options				
LRH1L	Latch Status Kit			100.00
LRH1R	Pushpad/Dogging Status or REX Status Kit			100.00

IDC (International Door Closers) 8000 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100IDCK	550.00	LR100IDC	600.00
30"	LR100IDCKEM	600.00	LR100IDCEM	650.00
Models				
Rim Mount	8610 / 8810 / 8510 / 8710			
Surface Vertical Rod	8630 / 8830 / 8530 / 8730			
Mortise	8620 / 8820			
Concealed Vertical Rod	8650 / 8850 / 8550 / 8750			
Options				
LRIDC1L	Latch Status Kit			100.00
LRIDC1R	Pushpad/Dogging Status or REX Status Kit			100.00

Marshall Best Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100MBSK	550.00	LR100MBS	600.00
Models				
Rim Mount	Q1100/QF1100			
Surface Vertical Rod	Q1200/QF1200			

PDQ Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100PDQK	550.00	LR100PDQ	600.00
Models				
Rim Mount	6200R			
Surface Vertical Rod	6200V			

PHI (Precision Hardware) Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100PDK	550.00	LR100PD	600.00
Models				
Rim Mount	2101			
Surface Vertical Rod	2201			
Concealed Vertical Rod	2801			
Rim Mount	5100			
Surface Vertical Rod	5200			
Options				
LRP1L	Latch Status Kit for PHI Rim 2000 Series			100.00
LRP2L	Latch Status Kit for PHI Vertical 2000 Series			100.00
LRP1R	REX Status or Pushpad/Dogging Status for PHI 2000 Series			100.00



Sargent Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100SGK	550.00	LR100SG	600.00
Models				
Rim Mount		8800		
Surface Vertical Rod		8700		
Concealed Vertical Rod		8600		

TownSteel ED1100 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100TSK	550.00	LR100TS	600.00
30"	LR100TSKEM	600.00	LR100TSEM	650.00
Models				
Rim Mount		ED1100		
Concealed Vertical Rod		ED1300		

SDC 6000 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"-48"	LR100SDCK	550.00	LR100SDC	600.00
30"	LR100SDCKEM	600.00	LR100SDCEM	650.00
Models				
Rim Mount		S6100		
Surface Vertical Rod		S6200		
Mortise		S6300		
Concealed Vertical Rod		S6800		
Options				
LRSDC1L	Latch Status Kit			100.00
LRSDC1R	Pushpad/Dogging Status or REX Status Kit			100.00

Von Duprin 22 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36" 48"	LR100VDK22	550.00	LR100VD22	600.00
30"	LR100VDKEM22	600.00	LR100VDEM22	650.00
Models				
Rim Mount		22		
Surface Vertical Rod		2227		
Options				
LRVD1L	Latch Status Kit			100.00
LRVD2R	REX Status or Pushpad/Dogging Status Kit			100.00

Stanley K2 QED Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100K2K	550.00	LR100K2	600.00
30"	LR100K2KEM	600.00	LR100K2EM	650.00
Models				
Rim Mount		QED111		
Surface Vertical Rod		QED114		
Concealed Vertical Rod		QED124		
Options				
LRK2R	Latch Status and REX Status or Pushpad/Dogging Status Kit			100.00

Von Duprin 98/99 and 33/35 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"- 48"	LR100VDK	550.00	LR100VD	600.00
30"	LR100VDKEM	600.00	LR100VDEM	650.00
Models				
Rim Mount		98 / 99		33A / 35A
Surface Vertical Rod		9827 / 9927		3327A / 3527A
Concealed Vertical Rod		9847 / 9947		3347A / 3547A
Mortise		9875 / 9975		
Three Point latching		9857 / 9957		
Options				
LRVD1L	Latch Status Kit for Von Duprin 98/99 Series			100.00
LRVD2L	Latch Status Kit for Von Duprin 33/35 Series			100.00
LRVD1R	REX Status or Pushpad/Dogging Status Kit for Von Duprin 98/99 and 33/35 Series			100.00

Tell Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100TEK	550.00	LR100TE	600.00
Models				
Rim Mount		9500		
Concealed Vertical Rod		9400		

Yale 7000 Series Exit Devices				
Opening for	Field Retrofit Kit	LIST	Factory Installed	LIST
36"	LR100YDK	550.00	LR100YD	600.00
42" - 48"	LR100YDK-42/48	600.00	LR100YD-42/48	650.00
Models				
Rim Mount		7100 / 7102 / 7200		
Surface Vertical Rod		7110 / 7210		
Concealed Vertical Rod		7120 / 7220		
Options				
LR1Y1L	Latch Status Kit			100.00
LR1Y1R	Pushpad/Dogging Status or REX Status Kit			100.00

* Note: Retracts only the latch

Note: Please check our website regularly for new releases in this product line

15 Series Electric Strike Distributor Discount Code **FK** **LIST**



- For 5/8" latch or 3/4" latch with 1/8" gap
 - Choice of failsafe or failsecure
 - 4.875" (124mm) radius corner
 - All stainless steel parts
 - 630 Satin stainless steel face plate
 - ANSI A156.31 compliant
- Input:** 200mA @ 12VDC, 150mA @ 24VDC
Dimensions: 1-1/4" W x 4-7/8" H x 1-1/2" D

MODEL			
15-4F12U	Failsafe, 12VDC	85.00	15-4S12U Failsecure, 12VDC 85.00
15-4F24U	Failsafe, 24VDC	85.00	15-4S24U Failsecure, 24VDC 85.00
RMB	Buzzer 12/24V AC/DC operation	40.00	BR64XL Rectifier for AC operation 25.00

Not recommended for wood application

25 Series Electric Strike **LIST**



The SDC 25 Series electric strike is designed for use with locksets having 5/8" (15mm) throw latchbolt. The compact low profile design with an internally mounted solenoid and factory supplied mounting tabs enable quick and easy installation where jamb space is limited.

- For 1/2" latch or 5/8" latch with 1/8" door gap
 - Latch bolt monitor standard
 - Failsecure
 - Field reversible for failsafe operation
 - Compatible with 5/8" latchbolts
 - All stainless steel parts
 - 630 Stainless steel standard finish
 - ANSI A156.31 compliant
- Dual Voltage:** 200/100 mA @ 12/24VDC
Latch Status: SPDT, 3 Amp @ 30VDC
Dimensions: 1-1/4" W x 4-7/8" H x 1-1/2" D

MODEL			
25-4U	4.875" (124mm) Square corner		120.00
RMB	Buzzer 12/24V AC/DC operation	40.00	BR64XL Rectifier for AC operation 25.00

Not recommended for wood application

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com





45 Series Electric Strike



LIST



The SDC 45 Series electric strike is designed for use with locksets having up to 3/4" latchbolts. The compact low profile design with an internally mounted solenoid and mounting tabs enable quick and easy installation where jamb space is limited. **UL Listing pending**

- For 5/8" latch or 3/4" latch with 1/8" gap
- **Latch bolt monitor standard**
- **Keeper closed and deadlocked standard**
- Field selectable failsecure - failsafe
- Field selectable voltage, 12/24V AC/DC
- 1/4" Horizontal alignment adjustment
- Low profile, 1-3/16" deep
- Plug-in wire connectors
- Mounting tabs
- All stainless steel parts with durable die cast body for corrosion resistance
- Fewer moving parts for maximum life
- 630 stainless steel standard
- ANSI A156.31 compliant



45-A


Dual Voltage: 280/140mA @ 12/24V DC
170/85mA @ 12/24V AC

Latch Status: SPDT, Dry 3Amp @ 30V (standard)
Keeper Closed / deadlocked SPDT, Dry 3Amp @ 30V (standard)
Keeper Open Closed Status: SPDT, Dry 3Amp @ 30V

SPECIFY MODEL **LIST**

MODEL

45-A	Included: One 4.875" square corner faceplate. <i>Stainless steel finish standard*</i> One 4.875" radius corner faceplate. <i>Aluminum finish standard*</i> One 7.9375" radius corner faceplate. <i>Aluminum finish standard*</i>	180.00
45-4S	4.875" x 1.25" (124x32mm) square corner faceplate. <i>Stainless steel finish standard*</i>	152.00
45-4R	4.875" x 1.25" (124x32mm) radius corner faceplate. <i>Aluminum finish standard*</i>	156.00
45-6R	6.875" x 1.25" (175x32mm) radius corner faceplate. <i>Aluminum finish standard*</i>	160.00
45-7R	7.937" x 1.438" (202x36.5mm) radius corner faceplate. <i>Aluminum finish standard*</i>	165.00

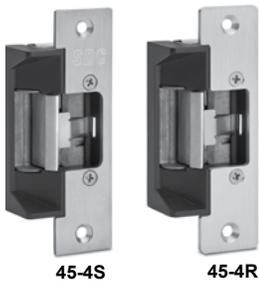

45-4S

45-4R



45-6R

45-7R

SPECIFY FINISH **Add to List**

Square Corner Faceplate

U	630 Dull stainless Steel (std)	N/C
H	613 Oil Rubbed Bronze	25.00
D	606 Dull Brass	25.00

Radius Corner Faceplate

V	628 Dull Aluminum (std)	N/C
Y	335 Black Anodized	25.00


45-A	Special Finish	75.00
-------------	----------------	--------------

OPTIONS **Add to List**

K	Keeper open/closed status	40.00	RMB	Buzzer 12/24V AC/DC operation	40.00
----------	---------------------------	--------------	------------	-------------------------------	--------------

SPECIFY LIP EXTENSION KIT **Add to List**

LE451	1" Lip Extension Kit	30.00
LE452	2" Lip Extension Kit (Includes two 1" extensions)	60.00
LE453	3" Lip Extension Kit (Includes three 1" extensions)	90.00

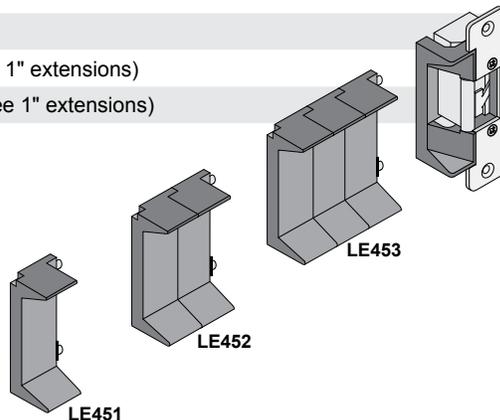

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012




UniFLEX™ SPEC 55 SERIES ELECTRIC STRIKE, GRADE 1 HEAVY DUTY - Factory tested 2500 lbs

STANDARD ANSI 4-7/8" STRIKE PREP - NO CENTERLINE RELOCATION REQUIRED. 5 YEAR LIMITED WARRANTY

One strike with choice of interchangeable faceplates for cylindrical and mortise locksets with or without deadbolts. Designed for new and retrofit hollow metal frame installations. *Frame face modification required.




55-A




55-B




55-D



55-D



55-E



55-F

- Up to 3/4" Latchbolt and 1" Deadbolt
- Field Reversible, Failsafe/Failsecure
- 1/8" Horizontal alignment adjustment
- Dual Voltage 12/24VDC
- Exceeds 1,000,000 cycles
- Factory tested 2500 lbs static strength
- UL tested 1500 lb Static strength
- 70 ft-lb Dynamic strength
- ANSI/BHMA A156.31 Grade 1
- Internal Solenoid, No Heat in Keeper
- All parts stainless steel
- Non-handed



Warrack Hersey Tested according to:
UL 10C, 3 Hr Fire Rated, 4' x 8' single door
us NFPA-252

CAN4-S104 (ULC-S104)
(Fail-Secure only).



UL 1034
Burglary-Resistant

BP10254
40WH

SPECIFY MODEL

LIST

Lockset compatibility: For locksets not listed below, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension
Deadbolt Application: 55-D, 55-E and 55-F, door will not close with deadbolt extended

MODEL	Application	
55-A	Compatible with all cylindrical locksets (Grade1 or equivalent)	420.00
55-B	Mortise locksets and exit mortise devices with or without a deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	440.00
55-C	Mortise locksets and mortise exit devices with or without a deadlatch located above the latchbolt. <i>SDC, Schlage, Baldwin, Hager</i>	440.00
55-D	Mortise locksets with a deadbolt and deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	460.00
55-E	Mortise lockset with deadbolt and no deadlatch feature. <i>Baldwin.</i>	460.00
55-F	Mortise locksets with a deadbolt and a deadlatch located above the latchbolt. <i>SDC, Schlage, Hager.</i>	460.00

SPECIFY FINISH

Add to List

U	630 Dull Stainless Steel (std)		N/C
G	612 Dull Bronze	P	625 Bright Chrome 40.00
D	606 Dull brass	H	613 Oil Rubbed Bronze 40.00
Q	626 Dull Chrome		40.00

SPECIFY MONITORING OPTIONS

Add to List

LBM/LCM available with 55-A, 55-B, 55-C; LBM/LCM/DBM available with 55-D, 55-E, 55-F

LBM	Latchbolt Monitor. Signals the door is closed and latched or unlatched and open. Non-handed.	60.00
LBM/LCM	Door Secure Monitor. Signals door is closed latched and the keeper is deadlocked. Also signals the door is unlatched or unlocked. Non-handed.	120.00
DBM-L	Deadbolt Monitor, Left Hand (Available with LCM and LBM. For D, E & F funtions only)	60.00
DBM-R	Deadbolt Monitor, Right Hand (Available with LCM and LBM. For D, E & F funtions only)	60.00

Accessories

Add to List

RMB	Buzzer, 12/24V. Indicates strike is energized	40.00
BR64XL	Wire Lead Rectifier. Converts AC to DC	25.00
LT	Tri-Color LED, red or green or amber. Indicates strike energized per field wiring	30.00

Monitoring Configurations

55-A, 55-B, 55-C:
LBM
LBM/LCM

55-D, 55-E, 55-F:
LBM
LBM/LCM
LBM/LCM/DBM



Price List Effective October 1, 2012


SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





UniFLEX™ UNIVERSAL STRIKE — MULTI APPLICATION PACK

LIST

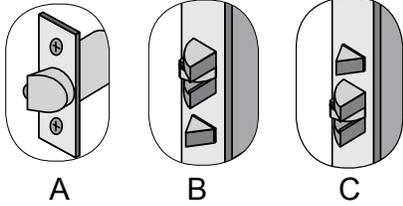


Application

- Adaptable to all 55-A, 55-B, 55C applications.
- Strike body and 5 faceplates
- For new and retrofit installation
- No relocation of the centerline.
- Non-handed

Operation
After releasing the latchbolt, the keeper returns to the locked position.

Finish: 630 Dull Stainless Steel

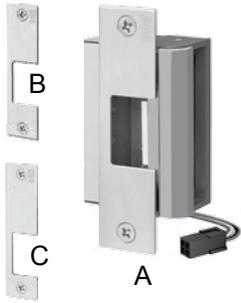

MODEL	Application	
55-ABC	Universal Strike for cylindrical locks, mortise locks without deadbolts and mortise exit devices including: SDC, Accurate, Arrow, Baldwin, Best, Corbin Russwin, Dorma, Falcon, Hager, Marks, Sargent, Schlage, Yale.	460.00

Lockset compatibility: For locksets not listed, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension



30 SERIES RIM MOUNT ELECTRIC STRIKES

Distributor Discount Code **FK**

Stainless steel electric strike for rim mount exit devices. Strike is non-handed, fail secure is standard with fail safe optional. Standard finish is stainless steel 630 (U). Check template to ensure compatibility.



30-4

SPECIFY MODEL		LIST
30-4-12	Stainless steel electric strike designed for rim-type exit devices 12VDC@ 0.51Amp	675.00
30-4-24	Stainless steel electric strike designed for rim-type exit devices 24VDC@ 0.25Amp	675.00
SPECIFY FINISH		Add to List
U	630 Dull Stainless Steel (Standard)	N/C
OPTIONS		Add to List
FS	Failsafe operation	35.00
	BR64XL Rectifier	25.00
LCBMA-30	Latch & locking cam monitor	215.00

Not Compatible with SDC S6000
See S6000 Electric Trim page 24



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012




CONVENTIONAL MORTISE BOLT LOCKS

Distributor Discount Code **AK LIST**

110/160 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
210/260 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
Mortise strike standard. **Not for use in wood frames.**

Locknetics replacements available for discontinued models 401, 402 and 404. Contact factory, POA.

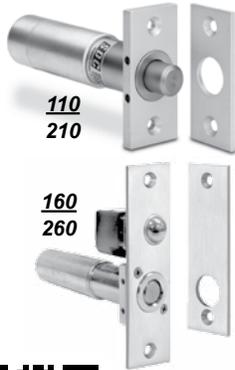

5" depth required

110IV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsafe V 628 Aluminum (standard)	180.00
210HV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsecure V 628 Aluminum (standard)	180.00
160IV	4-7/8" x 1-1/4" Face plate with auto relock switch, failsafe V 628 Aluminum (standard)	240.00
260HV	4-7/8" x 1-1/4" Face plate with auto relock switch, failsecure V 628 Aluminum (standard)	240.00



SPACESAVER® MORTISE BOLT LOCKS FIT 1-3/4" FRAMES

Distributor Discount Code **AK LIST**

Dimensions: 8"L x 1-1/2"W x 1-5/8"D
FS/1090/1490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
1290/2490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC



UL US LISTED Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"



FS23MIV	Dual failsafe	360.00
1091AIV	Failsafe	350.00
1091ADLIV	Dead locking, failsafe	415.00
1291AHV	Failsecure	415.00
1490AIV	Fits 1-1/2" frame (non UL), failsafe	415.00
2490AHV	Failsecure. Fits 1-1/2" frame (non UL), failsecure V 628 Aluminum Finish (standard)	490.00

SPECIAL FINISHES

Add to List

Y	335 Black	36.00
Plated Architectural Finishes Special order - no cancellations, no return		
C	605 Bright Brass	78.00
D	606 Dull Brass	78.00
F	611 Bright Bronze	78.00
G	612 Satin Bronze	78.00
H	613 Oil Rubbed Bronze	78.00
P	625 Bright Chrome	78.00
Q	626 Dull Chrome	78.00
U	630 Stainless Steel	78.00



HEAVY DUTY SPACESAVER® MORTISE BOLT LOCKS

Distributor Discount Code **AK LIST**

1190A failsafe, 0.7Amp @ 24VDC
2090A failsecure, 2.5 Amp In rush, 0.4 Amp seated @ 24VDC

1190AU	Failsafe	415.00	2090AU	Failsecure	515.00
Standard Finish: U 630 Dull Stainless Steel					
Specialty Lock Applications available by request					

UL US LISTED Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

OPTIONS

Add to List

B	Bolt position sensor, SPDT	55.00
D	Door position sensor, SPDT	55.00
BR64XL	Rectifier for AC Operation	25.00
PR1000	Power Regulator for 1090 and 1190 series	60.00





SURFACE MOUNT BOLT LOCKS


Distributor Discount Code **AK LIST**




180/280

Dimensions: 6" L x 2" W x 2" H
 Standard finish: 628 Aluminum, block strike included
 180 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
 280 Dual Voltage Coil: 900/450 mA @ 12/24 VDC

Door Hand
 See page 4



Surface Mount
Outswing Door



Top Jamb
Inswing or Sliding Door

MODEL

180ALIV	Surface mount, left hand, failsafe, with auto relock	260.00
180ARIV	Surface mount, right hand, failsafe, with auto relock	260.00
180ALRIV	Top Jamb, left hand reverse, failsafe, with auto relock	260.00
180ARRIV	Top Jamb, right hand reverse, failsafe, with auto relock	260.00
280LHV	Surface mount, left hand, or top jamb mount right hand reverse, failsecure less auto relock	260.00
280RHV	Surface mount, right hand, or top jamb mount, left hand reverse, failsecure less auto relock	260.00

SPECIFY FINISH Add to List

Single Surface Mounted Bolt Locks

Y	335 Black	55.00
----------	-----------	--------------

SPECIFY OPTIONS Add to List

B	Bolt position sensor, SPDT	55.00
D	Door position sensor, SPDT	55.00
BR64XL	Rectifier for AC Operation	25.00



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



PROGRAMMABLE CABINET LOCK

Distributor Discount Code **AK LIST**



SDC's 295 Battery Powered Keyless Cabinet Lock provides an easy, economical solution for security and keyless access control for a wide variety of cabinet doors, drawers, storage lockers and more. Quickly and easily add/delete up to 30 individual user PIN codes with programmable keypad. Powered by 2 x AAA batteries, the need for low voltage wiring is eliminated. 2 Programmable Application Modes.

Dimensions: 5.5"H x 1.4"W x 0.85"D - 1.25"D w/Dial (40 x 35.5 x 21.5mm - 32mm w/Dial)

MODEL

295	Programmable cabinet lock	150.00
------------	---------------------------	---------------



CABINET LOCK

Distributor Discount Code **AK LIST**



- For drawers, cabinets or display cases with swinging or sliding doors
- Failsecure (field reversible for failsafe)
- Dual Voltage: 12/24VDC @ 250mA/130mA
- Dimensions: 3.25" L x 1.125" W x 1.125" D
- Finish: Black

MODEL

290	Micro cabinet lock	105.00
290LS	Micro cabinet lock with locked status switch	130.00



1583 MICRO CABINET EMlock®

Distributor Discount Code **GK LIST**



Holding Power 300lbs.

Dual voltage: 500/250 mA @ 12/24 VDC
 Dimensions: Lock 6-1/2"L x 1-1/8"W x 1-1/4"H
 Armature 5-1/8"L x 1-1/8"W x 1/4"H

MODEL

1583V	Micro EMlock® for cabinets, drawers and lockers	196.00
--------------	---	---------------



Excel™ Architectural Series

Distributor Discount Code **GK LIST**



- Door status, lock status and Bi-color LED
- Interlocking quick mount assembly
- Self drilling and tapping mounting screws and machine screws
- Adjustable mounting bracket
- Wire access chamber with terminal block
- Dual voltage 12/24VDC
- 628 Clear anodized aluminum

Model

E300	300 lb / 136 kg with door status, locked status and LED	170.00
-------------	---	---------------



1575U



1576



Holding Power 1200lbs.

Magnetic Bond Sensor and Door Position Sensor Standard

Dual voltage: 450 / 225 mA @ 12/24VDC

3 Ft cable

Brushed stainless steel housing

Conduit fitting: 1/2" x 3/4"

Dimensions: 8-11/16" L x 2-1/2" H x 1-5/8" D

MODEL	DESCRIPTION	
1575U	Single EMLock® with magnetic bond and door status sensors	435.00
1576U	Single EMLock® face drilled mounting with magnetic bond and door status sensors	435.00

ACCESSORIES

Add to List



1576-AB



1576-BK

MODEL DESCRIPTION

For sliding gate applications

1576-BK	Mounting Bracket for 1576	80.00
1576-AB	Armature Mounting Bracket for 1576	80.00

For swinging gate or top jamb door application



1576-MP	Lock Mounting Plate for 1576	55.00
1576-ZB	Lock Mounting Bracket for 1576 (Includes 1576-MP)	160.00




1576-MP




1576-ZB

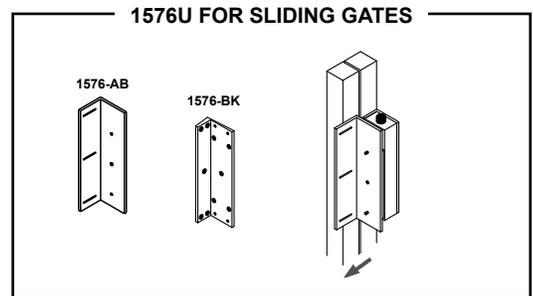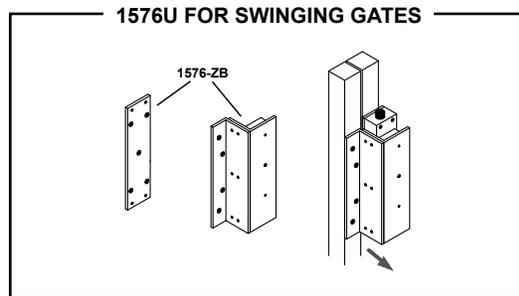

1576U TOP JAMB MOUNT FOR INSWING DOORS

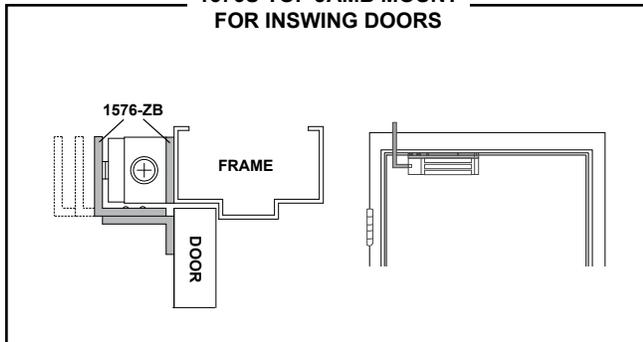



1575U FOR OUTSWING DOORS

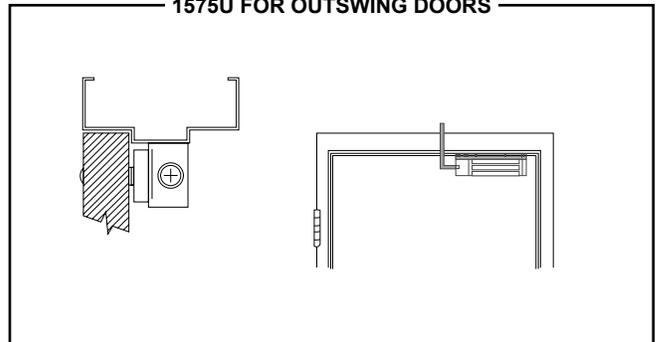



350 Narrow Line EMLock®

Distributor Discount Code **GK**

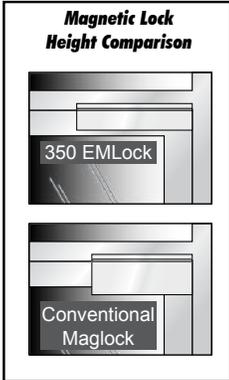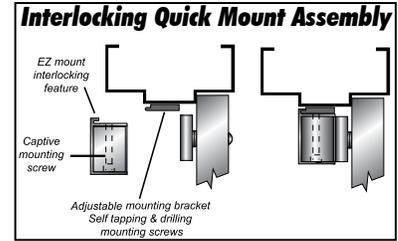

350 Single Specifications

Holding Force	1200 lbs
Input Voltage	Dual 12/24 VDC
Current	309mA @ 24VDC / 560mA @ 12VDC
Dimensions	12-1/2" L x 2-1/8" H x 1-11/16" W (318 x 54 x 43mm)
Magnetic Bond Sensor	1-SPDT output, 250mA max. @ 12/24VDC
Door Status Sensor	1-SPDT output, 250mA max. @ 12/24VDC
LED Indicator	Green-Secure, Red-Unlocked

352 Double Specifications

Holding Force	1200 lbs per door leaf
Input Voltage	Dual 12/24 VDC
Current	618mA @ 24VDC / 1120mA @ 12VDC
Dimensions	25" L x 2-1/8" H x 1-11/16" W (635 x 54 x 43mm)
2 Magnetic Bond Sensors	SPDT outputs, 250mA max. @ 12/24VDC
2 Door Status Sensor	SPDT outputs, 250mA max. @ 12/24VDC
2 LED Indicators	Green-Secure, Red-Unlocked

MODEL	DESCRIPTION	LIST
350V	Single Narrow Line Magnetic Lock, 628 Aluminum, specify 2 for pair of doors with mullion, Retrofits Locknetics MagForce 350+ & 350+/DSM/MBS/L 1	375.00
352V	Double Narrow Line Magnetic Lock, 628 Aluminum, for pair of doors without mullion, Retrofits Locknetics MagForce 352+ & 352+/DSM/MBS/L2	750.00

Top Jamb Mounting Kit		Distributor Discount Code	GK	LIST
TJ350	Single			130.00
TJ352	Double			230.00

GLASS DOOR MOUNTING KIT		Distributor Discount Code	GK	LIST
-------------------------	--	---------------------------	----	------

- Field adjustable for 1/2", 5/8" and 3/4" all glass Herculite doors

HDB350	Single	180.00	HDB352	Double, 2 single kits	360.00
---------------	--------	---------------	---------------	-----------------------	---------------



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdssecurity.com • www.sdssecurity.com

Price List Effective October 1, 2012



EXCEL™ SERIES VALUE ENGINEERED MAGNETIC LOCKS

The Excel™ product line is designed for system integrators, distributors, installers and building owners presently using low cost import or private label brand access control hardware.



E6200



E300
see page 41




E1200




E600




E1200-390MP

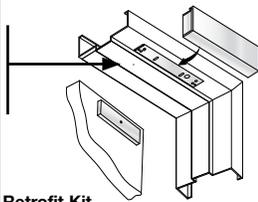

Retrofit Kit

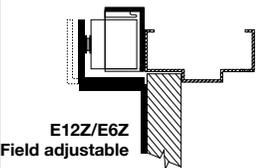

E12Z/E6Z
Field adjustable



E12U/E6U
Field adjustable
to glass thickness



E12A



E6A



E12L

Excel™ Industrial Series

Distributor Discount Code **GK** **LIST**

- Retrofits popular competitive brands
- Magnetic Bond Sensor and door status standard
- Epoxy sealed electronics, tamper resistant and weatherized for indoor and outdoor use (retrofits M62j)
- Stainless steel machine screws and blind nuts
- 10 ft [3.05m] jacketed, stranded conductor cable
- Dual voltage 250/150 mA @ 12/24VDC
- Architectural stainless steel housing, US32D/630

MODEL

E6200 1200 lb / 545 kg with SPDT door status, SPDT magnetic bond sensor **425.00**

Top Jamb Mounting Kit

Distributor Discount Code **GK** **LIST**

TJ62 Top jamb kit for E6200 **120.00**

Excel™ Architectural Series

Distributor Discount Code **GK** **LIST**



- Door status, lock status and Bi-color LED
- Interlocking quick mount assembly
- Self drilling and tapping mounting screws and machine screws
- Adjustable mounting bracket
- Wire access chamber with terminal block
- Dual voltage 12/24VDC
- 628 Clear anodized aluminum

Models

E1200 1200 lb / 545 kg with door status, locked status and LED **265.00**

E600 600 lb / 272 kg with door status, locked status and LED **220.00**

Retrofit Kit for Discontinued Locknetics 390+ PLUS



Distributor Discount Code **GK** **LIST**

Enables replacement of Locknetics 390+ PLUS with SDC's E1200 (ordered separately)

E1200-390MP Retrofit Kit *Includes lock mounting plate and armature that retrofit existing 390+ mounting holes. When alignment permits, existing 390+ armature may be used.* **35.00**

Top Jamb Mounting Kit for Inswing Doors

Distributor Discount Code **GK** **LIST**

E12Z Top jamb kit for E1200 **85.00**

E6Z Top jamb kit for E600 **85.00**

Glass Door Armature Mounting Kit

Distributor Discount Code **GK** **LIST**

E12U Glass door kit for E1200 **120.00**

E6U Glass door kit for E600 **120.00**

Mounting Brackets and Filler Plates

Distributor Discount Code **GK** **LIST**

Used for the extension of a narrow frame header mounting surface, the bracket provides additional surface area for proper lock mounting

E12A E1200 adjustable angle bracket. 10-1/2"L x 1-3/4"H x 3-1/8"D (266 x 44 x 79mm) **35.00**

E6A E600 adjustable angle bracket. 9-7/8"L x 1-1/4"H x 2-1/4"D (250 x 32 x 57mm) **25.00**

E12L E1200 angle bracket. 10-1/2"L x 1-1/2"H x 3/4"D (266 x 38 x 19mm) **25.00**
Field cut for E600

Used where the frame stop does not provide enough mounting surface, the filler bar provides enough additional surface area for proper lock mounting.

E12F01 E1200 stop filler plates. 5/8"H x 3/4"D x 10-1/2"L (16 x 19 x 266mm) **20.00**
Field cut for E600.

E12F02 E1200 stop filler plates. 3/4"H x 3/4"D x 10-1/2"L (19 x 19 x 266mm) **20.00**
Field cut for E600.



E12F01
E12F02

Glass Door Armature Mounting Kit

Distributor Discount Code **GK** **LIST**

E1200-DF Heavy Duty Drill Fixture for E1200 **150.00**

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



12 - Magnetic Locks



EMLock® MAGNETIC LOCKS

Distributor Discount Code **GK**

EMLock®
Lifetime Warranty

BHMA
CERTIFIED
ANSI/BHMA A156.23
Grade 1



3774-0324:100

MEA
City of New York
768-80-SA



GWXT Auxiliary Locks
CVXJ Burglary Resistant Electrically Operated Door Lock



UL10C Positive Pressure Compliant
UBC Classified in accordance with
Uniform Building Code standard 7-2
"Fire Test for Door Assemblies"

1510 Series Grade 1
1650 lb / 748 Kg Holding Force

1570 Series Grade 1
1200 lb / 544 Kg Holding Force

1580 Series Grade 1
650 lb / 295 Kg Holding Force

Electrical Specifications	Electrical Specifications	Electrical Specifications
Voltage: 12/24VDC Voltage Sensing Input Single: 350mA @ 24VDC; 670mA @ 12VDC Double: 700mA @ 24VDC; 1.34A @12VDC	3 Watt Power Saver Voltage: 12/24VDC Voltage Sensing Input Single: 125mA @ 24VDC; 250mA @ 12VDC Double: 250mA @ 24VDC; 500mA @ 12VDC	Voltage: 12/24VDC Voltage Sensing Input Single: 220mA @ 24VDC; 440mA @ 12VDC Double: 440mA @ 24VDC; 880mA @ 12VDC
Mechanical Specifications	Mechanical Specifications	Mechanical Specifications
Single: 11" L x 2.75" H x 1.562" D (279.4 x 69.9 x 39.7 mm) Double: 22" L x 2.75" H x 1.562" D (558.8 x 69.9 x 39.7 mm)	Single: 11" L x 2.75" H x 1.562" D (279.4 x 69.9 x 39.7 mm) Double: 22" L x 2.75" H x 1.562" D (558.8 x 69.9 x 39.7 mm)	Single: 8.75" L x 2.125" H x 1.25" D (222.2 x 54 x 31.8 mm) Double: 17.5" L x 2.125" H x 1.25" D (444.5 x 54 x 31.8 mm)

12 - Magnetic Locks

EMLOCK® MODELS

Distributor Discount Code **GK** **LIST**



1650lb / 748 kg Holding Force, Automatic Voltage Sensing Input

1511 Single EmLock®	450.00
1512 Double EmLock®	900.00
1513 Single EmLock®, split armature for pair of doors	505.00

1200lb / 544 kg Holding Force, Automatic Voltage Sensing Input

1571 Single EmLock®	420.00
1572 Double EmLock®	850.00
1573 Single EmLock®, split armature for pair of doors	475.00

650lb / 295 kg Holding Force, Automatic Voltage Sensing Input

1581 Single EmLock®	350.00
1582 Double EmLock®	690.00

SPECIFY FINISH

Add to List

	Single EmLock	Double Emlock
Anodized Finishes (Architectural Housing: Add 20.00 per foot to base)		
V 628 Aluminum (standard)	N/C	N/C
Y 335 Black	80.00	120.00
Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)		
X Dark Bronze Powder Coat Painted (313/613 Equal)	80.00	120.00
C Brass Powder Coat Painted	80.00	120.00
Plated Finishes - Special order, no cancellation, no returns		
P 625 Bright Chrome	190.00	220.00
Q 626 Dull Chrome	190.00	220.00

Architectural Housing add \$30 per foot to above Single Unit Price.



1583
see page 41



1575U
see page 43



1576
see page 43



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com

Price List Effective October 1, 2012

SPECIFY OPTIONS

Add to List

See Modular Program price list when ordering separately for field upgrades. Different part numbers and pricing apply.

T	Adjustable timer. Built in field adj. 0-30 sec. relock delay. Specify one for single or double EmLocks® (not available with 1580 series)	64.00
D	Door position sensor. Indicates door open and door closed. Specify two for double EMLocks® (not available with 1513 and 1573) SPDT Dry, 250 mA @ 30VDC.	40.00
B	Magnetic bond sensor. Indicates locked with full holding power and unlocked, low holding power, low voltage, tampering and obstruction between armature and magnetic core. Specify (2) for double EmLocks (Not available with 1513 and 1573) • 1510 & 1570 Series: SPDT Dry, 250 mA @ 30VDC. • 1580 Series: SPST N.O., Dry, 250 mA @ 30VDC.	60.00
L	Bi-color status LED indicator. Field selectable Red and Green. (Not installed in lock.) Indicates lock energized when wired to lock input. Indicates de-energized/unlocked or "Enter/Go" when wired to built-in TD Module Indicates energized and de-energized or "Enter/Go" when wired to access control auxiliary output. Indicates door is closed and locked and door is unlocked when wired to Bond Sensor.	16.00
A	Anti-tamper sensor. Indicates access cover removal. SPDT Dry, 1 Amp @ 30VDC	50.00

SPECIFY TOP JAMB MOUNTING KIT

Distributor Discount Code **GK LIST**

Kits for 1200lb and 1650 lb Locks		Kits for 650lb Locks		
TJ1	Single	TJ81	Single	120.00
TJ2	Double	TJ82	Double	196.00

Add to List

Anodized Finishes

V 628 Aluminum (std)	N/C	Y Black Anodized	80.00	160.00
-----------------------------	------------	-------------------------	--------------	---------------

Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

X Dark Bronze Powder Coat Painted	C Brass Powder Coat Painted	80.00	160.00
--	------------------------------------	--------------	---------------

Plated Finishes - Special order, no cancellation, no returns

P 625 Bright Chrome	Q 626 Dull Chrome	190.00	220.00
----------------------------	--------------------------	---------------	---------------

Add to List

SPECIFY GLASS DOOR MOUNTING KIT

Distributor Discount Code **GK LIST**

- Universal glass door kits are compatible with lock models, except 1513 and 1573
- Field adjustable for 1/2", 5/8" and 3/4" all glass Herculite doors

Kits for 1511, 1571, 1581		Kits for 1512, 1572, 1582		
HDB1	Single	180.00	HDB2 Double, 2 single kits	360.00

Add to List

Anodized Finishes

V 628 Aluminum (std)	N/C	Y Black Anodized	80.00	160.00
-----------------------------	------------	-------------------------	--------------	---------------



Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

X Dark Bronze Powder Coat Painted	C Brass Powder Coat Painted	80.00	160.00
--	------------------------------------	--------------	---------------


Plated Finishes - Special order, no cancellation, no returns

P 625 Bright Chrome	Q 626 Dull Chrome	100.00	200.00
----------------------------	--------------------------	---------------	---------------

Add to List




Field Upgrade without Removing from the Frame

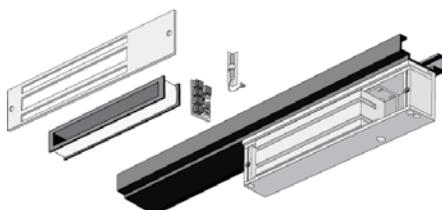

- Field Install
- Monitoring outputs
 - Timers
 - Top jamb "Z" kit
 - Glass door kits

Interlocking Quick Mount Assembly

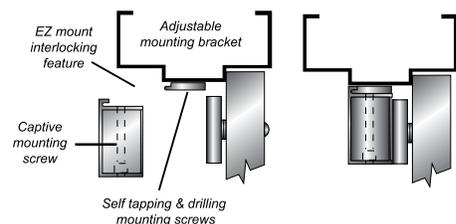

EMLock® MAGNETIC LOCKS

SPECIFY ARCHITECTURAL HOUSINGS

GK Add to List

Full Width Housings - Appear as part of the frame to provide a superior architectural appearance.
Vertical Housings - Side jamb mount, provides 2,400 or 3,300 lbs. of holding force.
Compatible with Models: 1511, 1512, 1571, 1572 with or without HDB kits.
 Specify housings with your EMLocks®.

Single Door Housing

30	30" Lock housing	400.00
36	36" Lock housing	400.00
40	40" Lock housing	400.00
48	48" Lock housing	400.00
CH	Custom length. Specify exact length	POA

Double Door Housing

60	60" Lock housing	650.00
72	72" Lock housing	650.00
84	84" Lock housing	650.00
96	96" Lock housing	650.00
CH	Custom length. Specify exact length	POA

Vertical Housings

1572VV82	Vertical Housing for 1572 EMLock, 82" length, for 84" opening	1500.00
1512VV82	Vertical Housing for 1512 EMLock, 82" length, for 84" opening	1550.00
CV	Custom length. Specify exact length	POA

See 46 for special finish designation and finish price

Retrofit Kit for Discontinued Locknetics 390+ PLUS

Distributor Discount Code

GK

LIST

Enables replacement of Locknetics 390+ PLUS with SDC's 1511 and 1571 (ordered separately)

1511-390AMP	Retrofit Kit includes lock mounting plate with self-tapping & drilling screws and Armature assembly, utilizes existing 390+ thru-bolt hole.	50.00
-------------	---	-------

Field Installed Modular Upgrade Kits

Ordered separately for field upgrade without removing the lock from the frame

For complete details contact SDC to request the Modular Upgrade Kit datasheet or download from the SDC website: www.sdcsecurity.com/docLibrary.aspx All available through shipQuick Inventory

EZ-T-10	Adjustable Timer Input Module: Specify (1) for single or double EmLocks® (not available with 1580 series)	64.00
---------	--	-------

EZ-D-10	1510, 1570 Door Position Sensor Module: Specify (2) for double EmLocks® (not available with 1513 and 1573)	40.00
---------	---	-------

EZ-D-80	1580 Door Position Sensor Module: Specify (2) for double EmLocks®	40.00
---------	--	-------

EZ-B-10	1510, 1570 Magnetic Bond Sensor Module: Specify (2) for double EmLocks® (Not available with 1513,1573)	60.00
---------	---	-------

EZ-A	Anti-Tamper Switch Module: Indicates cover plate removal.	50.00
------	--	-------

EZ-1510W	Holding Force Module: Replace a 1200lb wire core (1570 series) with this 1650lb wire core. Specify (2) for double EmLocks®	50.00
----------	---	-------

EZ-1570W	Energy Saver Module: Save on power supply and long term energy costs by replacing 8.4 Watt, 1650lb coil with 3 Watt, 1200lb holding force coil. Specify (2) for double EmLocks®	50.00
----------	--	-------

EZ-B-80	1580 Magnetic Bond Sensor Module (SPST): Specify (2) for double EmLocks®	60.00
---------	---	-------

REUSABLE HEAVY DUTY DRILL FIXTURE

Distributor Discount Code

G

LIST

1511-DF	Heavy duty drill fixture for 1571 and 1511	150.00
1581-DF	Heavy duty drill fixture for 1580	150.00

BN-PT	Blind Nut Placement Tool	120.00
BN-50	Blind Nuts, 10/32, 50 Pack	50.00

12 - Magnetic Locks



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012





UNIVERSAL HEADER BRACKET

Distributor Discount Code **GK LIST**

Used in lieu of angle brackets, the Universal Header Bracket provides a faster mounting solution, saving time and labor costs for several EmLock® models. Reduce potential for mis-sized and misaligned mounting holes, broken taps, removal of broken taps. Combined with interlocking E-Z mount assembly, save up to a half day's labor with the installation of 12 locks.

Features

- Solid 1" bar provides higher security and superior aesthetics.
- Machined wire chase provides concealed and secure wiring
- Multiple pre-drilled and tapped mounting holes to accommodate the use of several different locks on either 4" or 4.5" aluminum frames



UB11V	Bracket for 1511, 1513, 1571. 1" x 1" x 11"	64.00
UB12V	Bracket for 1512, 1572. 1" x 1" x 22"	128.00

See special finishes 50



ALUMINUM SPACER BRACKET & CONCRETE FILLED FRAME PLATE - PRE-DRILLED & TAPPED

Distributor Discount Code **GK LIST**

Application



- Aluminum frames with blade stop - lowers EmLock® below blade stop
- Concrete filled hollow metal frames - provides multiple points for concealed wire entry

Features

- Pre-drilled and tapped specifically for 1510, 1570, 1580 EmLock
- Machined wire chase provides multiple points for concealed wire entry from concrete filled frames.



UF11V



UF11V	Bracket for 1511, 1513, 1571, 1573. 1/2" x 1-1/2" x 11"	90.00
UF12V	Bracket for 1512 and 1572. 1/2" x 1-1/2" x 22"	112.00
UF81V	Bracket for 1581. 1/2" x 1-1/4" x 8-3/4"	72.00
UF82V	Bracket for 1582. 1/2" x 1-1/4" x 17-1/2"	100.00



ARMATURE MOUNTING PLATE

Distributor Discount Code **GK LIST**




The AR Mounting plate provides a solution for mounting the EmLock® armature to the top rail of aluminum, glass, wood and hollow metal doors that do not permit the use of thru bolts. Dimension: 8 1/2" x 3"

MODEL

AR11Y	Armature mounting plate (Black) Specify two for models 1512, 1572	60.00
AR11YD	Armature mounting plate (black) with door sensor Specify two for models 1512, 1572	100.00



AR11Y

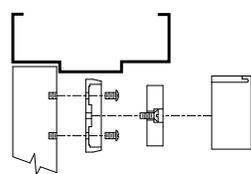

DOOR COORDINATOR LOCK MOUNTING KIT

Distributor Discount Code **GK LIST**



DC-1	Door coordinator mounting bracket for single models 1511 and 1571.	120.00
DC-2	Door coordinator mounting bracket for double models 1512 and 1572.	220.00





DC-1



DC-2

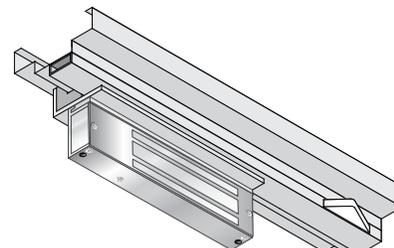

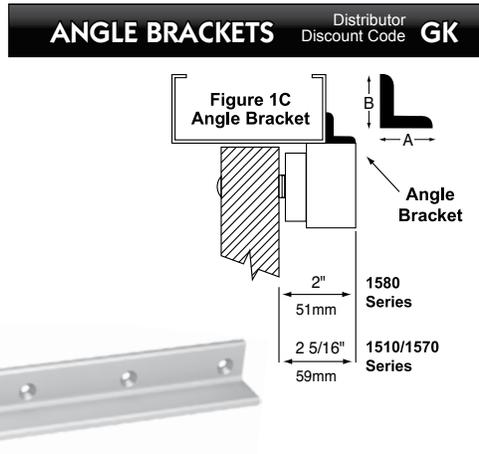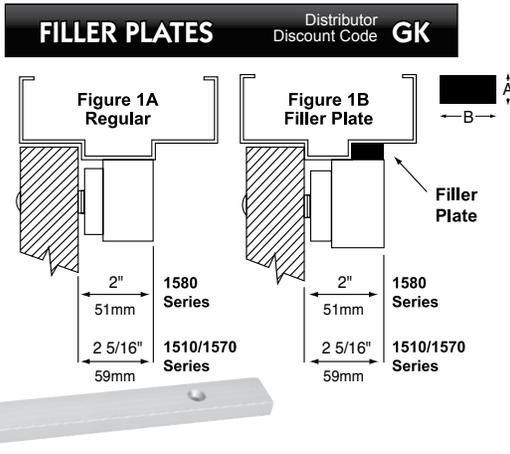

FILLER PLATES: For extension of the stop to provide a proper mounting surface on the underside of the header. See Figure 1B.

ANGLE BRACKETS: Used as extension on shallow door frames to provide adequate mounting surface. See Figure 1C.

FOR 8-3/4" (222mm) SINGLE EMLOCK MODELS				GK
1581, 101V81S, 101V81T				
PART #	A	x B	LIST	
FP01	1/8"	x 1-1/4"	(3 x 32mm)	30.00
FP02	1/4"	x 1-1/4"	(6 x 32mm)	32.00
FP03	3/8"	x 1-1/4"	(10 x 32mm)	34.00
FP04	1/2"	x 1-1/4"	(13 x 32mm)	36.00
FP05	5/8"	x 1-1/4"	(16 x 32mm)	36.00

FOR 11" (279mm) SINGLE EMLOCK MODELS				GK
1511 1571 1511S 101V71S				
1513 1573 1511T 101V71T				
PART #	A	x B	LIST	
FP11	1/8"	x 1-1/4"	(3 x 32mm)	33.00
FP12	1/4"	x 1-1/4"	(6 x 32mm)	34.00
FP13	3/8"	x 1-1/4"	(10 x 32mm)	34.00
FP14	1/2"	x 1-1/4"	(13 x 32mm)	38.00
FP15	5/8"	x 1-1/4"	(16 x 32mm)	40.00

FOR 17-1/2" (445mm) DOUBLE EMLOCK MODEL				GK
1582				
PART #	A	x B	LIST	
FP30	1/8"	x 1-1/4"	(3 x 32mm)	38.00
FP31	1/4"	x 1-1/4"	(6 x 32mm)	40.00
FP32	3/8"	x 1-1/4"	(10 x 32mm)	42.00
FP33	1/2"	x 1-1/4"	(13 x 32mm)	44.00
FP34	5/8"	x 1-1/4"	(16 x 32mm)	46.00

FOR 22" (559mm) DOUBLE EMLOCK MODELS				GK
1512 1572				
PART #	A	x B	LIST	
FP21	1/8"	x 1-1/4"	(3 x 32mm)	38.00
FP22	1/4"	x 1-1/4"	(6 x 32mm)	40.00
FP23	3/8"	x 1-1/4"	(10 x 32mm)	42.00
FP24	1/2"	x 1-1/4"	(13 x 32mm)	44.00
FP25	5/8"	x 1-1/4"	(16 x 32mm)	46.00

FOR 8-3/4" (222mm) SINGLE EMLOCK MODELS				GK
1581, 101V81S, 101V81T				
PART #	A	x B	LIST	
AB01	1"	x 1"	(25 x 25mm)	38.00
AB02	1"	x 1-1/2"	(25 x 38mm)	40.00
AB03	1-1/2"	x 1-1/2"	(38 x 38mm)	42.00
AB04	2"	x 1-1/2"	(51 x 38mm)	44.00

FOR 11" (279mm) SINGLE EMLOCK MODELS				GK
1511 1571 1511S 101V71S				
1513 1573 1511T 101V71T				
PART #	A	x B	LIST	
AB11	1"	x 1"	(25 x 25mm)	40.00
AB12	1"	x 1-1/2"	(25 x 38mm)	42.00
AB13	1-1/2"	x 1-1/2"	(38 x 38mm)	44.00
AB14	2"	x 1-1/2"	(51 x 38mm)	46.00

FOR 17-1/2" (445mm) DOUBLE EMLOCK MODEL				GK
1582				
PART #	A	x B	LIST	
AB30	1"	x 1"	(25 x 25mm)	50.00
AB31	1"	x 1-1/2"	(25 x 38mm)	54.00
AB32	1-1/2"	x 1-1/2"	(38 x 38mm)	58.00
AB33	2"	x 1-1/2"	(51 x 38mm)	62.00

FOR 22" (559mm) DOUBLE EMLOCK MODELS				GK
1512 1572				
PART #	A	x B	LIST	
AB21	1"	x 1"	(25 x 25mm)	50.00
AB22	1"	x 1-1/2"	(25 x 38mm)	54.00
AB23	1-1/2"	x 1-1/2"	(38 x 38mm)	58.00
AB24	2"	x 1-1/2"	(51 x 38mm)	62.00

SPECIFY FINISH

Add to List

	Single EmLock	Double EmLock
V 628 Aluminum (standard)	N/C	N/C
Y 335 Black Anodized	30.00	60.00
Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)		
X Dark Bronze Powder Coat Painted	30.00	60.00
C Brass Powder Coat Painted	30.00	60.00
Plated Finishes - Special order, no cancellation, no returns		
P 625 Bright Chrome	30.00	60.00
Q 626 Dull Chrome	30.00	60.00



HI/SHEAR CONCEALED EMLock®

Distributor Discount Code **OK**

EMLock®

Lifetime Warranty




GWXT Auxiliary Locks CVXJ Burglary Resistant Electrically Operated Door Lock



UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"



1561

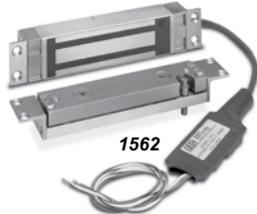


1562




1565



1566



HTR



WDRB

Features

- Door static and relock sensor, detects door is closed, at rest and aligned before relocking
- Automatic voltage sensing input
- Lateral and vertical alignment adjustment
- Floating armature with alloy steel shear tabs

Electrical Specifications

- 1561 and 1562: 650/350 mA @ 12/24VDC Auto-Sensing
- 1565 and 1566: 800/400 mA @ 12/24VDC Auto-Sensing

CONCEALED HI/Shear EMLock

List

2,000 Lbs. Holding Force, 8" x 1-1/2" Lock

1561ITCM 1-5/8" depth, integrated electronics for 1-3/4" to 2" frames **765.00**

1562ITCM 1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames **765.00**

2,700 Lbs. Holding Force, 10-7/16" x 1-1/2" Lock

1565ITC 1-5/8" depth, integrated electronics, for 1-3/4" to 2" frames **830.00**

1566ITC 1-1/4" depth, external electronics, for 1-1/4" to 1-1/2" frames **830.00**

ITC

Standard mounting armature kit for aluminum and hollow metal doors with 7/8" to 1-1/8" deep top channels, wood doors and factory prepared hollow metal flush edge doors.

Options

FTC	Mounting kit for field prepared horizontal mounting in hollow metal doors with flush edge.	N/C
HTC	Mounting kit for 1-15/16" deep herculite channels	N/C
HTR	Herculite top rail armature adjustment bracket for leading edge adjustments.	340.00

Add Ons

Add to List

B	Bond sensor indicates proper armature contact and reduced holding power due to improper armature contact or tampering. SPDT 0.25 Amp maximum (<i>not available on 1562 and 1566</i>)	110.00
D	Door position switch indicates door open or closed. SPDT 0.25 Amp maximum.	50.00
L-3	External LED status indicator, mounts separately through the frame and may be used to indicate lock is energized or wired to BAS bond sensor for door status.	16.00
WDRB	Wood door reinforcement box for 1565 and 1566	40.00
WDRBM	Wood door reinforcement box for 1561 and 1562	40.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



13 - Magnetic Shear Locks



HI/SHEAR SEMI-CONCEALED & SURFACE MOUNT EMLock®

Distributor Discount Code **OK**

EMLock®
Lifetime Warranty



ANSI/BHMA A156.23
Grade 1



3774-0324:100

MEA
City of New York
768-80-SA



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012

13 - Magnetic Shear Locks



1562SC



1562SCHDB



1561S



1561TJ

SEMI-CONCEALED HI/SHEAR EMLOCKS List

2,000 Lbs. Holding Force, 8" x 1-1/2" x 1-1/4" Lock

1562SC	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" For Hollow metal frames	900.00
1562SCHDB1/2	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames For 1/2" Herculite full glass doors	1,115.00
1562SCHDB3/4	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames For 3/4" Herculite full glass doors.	1,115.00

SURFACE MOUNT HI/SHEAR EMLOCKS List

2,000 Lbs. Holding Force, 8" x 1-3/4" x 1-3/4" Lock
For Hollow metal frames and wood or hollow metal doors

1561S	Surface mount for the push side of the door with integrated electronics	1060.00
1561TJ	Surface top jamb mount for the pull side of the door with integrated electronics	1060.00

STANDARD FINISH Add to List

V	628 Anodized Aluminum	N/C
Y	Black Anodized	60.00
Powder Coat Finishes (a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)		
X	Dark Bronze Powder Coat Painted	80.00
C	Brass Powder Coat Painted	60.00
Plated Finishes - Special order, no cancellation, no returns		
P	625 Bright Chrome	190.00
Q	626 Dull Chrome	

OPTIONS Add to List

B	Bond sensor indicates proper armature contact and reduced holding power due to improper armature contact or tampering. SPDT 0.25 Amp maximum (not available on 1562 and 1566)	110.00
D	Door position switch indicates door open or closed. SPDT 0.25 Amp maximum.	50.00
L-3	External LED status indicator, mounts separately through the frame and may be used to indicate lock is energized or wired to BAS bond sensor for door status.	16.00



Price List Effective October 1, 2012

1511S / T

VOICE & DIGITAL ANNUNCIATION

The Exit Check® 1511S series incorporates an alternating 85 db tone and voice message with a digital countdown display and sign that provides clear and comprehensive instructions for persons without prior knowledge of door operation. This is especially significant for those who are blind or hearing impaired.

FIELD SELECTABLE ACTUATION

- Door Movement
- Exit Sense Bar
- Exit Device Switch Kit (See page 68)
- Latch Monitoring Strike (See page 68)

1,650 lbs. Holding Force Standard
830/450 mA @ 12/24VDC (single)

1,200 lbs. Energy Saver Option E
380/225 mA @ 12/24VDC (single)
Control more locks with fewer power supplies
Save on electricity consumption and power supply investment.

1511S

SINGLE MODEL

For use with single doors equipped with Exit Sense Bars, surface vertical rod, concealed vertical rod, mortise and rim mount exit devices, mortise locksets and cylindrical locksets.

1511T

TANDEM MODEL

For use with pairs of doors equipped with Exit Sense Bars, surface mounted vertical rod exit devices and concealed vertical rod exit devices with surface mounted triggers and strikes.

Activating either door unlocks both doors.

Electrical Specifications

Voltage: Auto Voltage Sensing 12/24VDC ± 10%
Standard 1,650 lbs holding force:
 820/450 mA @ 12/24VDC
Energy Saver E Option 1,200 lbs. Holding Force:
 400/275 mA @ 12/24VDC

Electrical Specifications

Voltage: Auto Voltage Sensing 12/24VDC ± 10%
Standard 1,650 lbs holding force:
 1500/850 mA @ 12/24VDC
Energy Saver E Option 1,200 lbs. Holding Force:
 650/400 mA @ 12/24VDC

Control Inputs

Request to Exit: Normally open, dry
Fire Alarm Release: Alarm panel closed dry contact. Opening of contact releases lock.

Mechanical Specifications

Single: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D mm)

Armature: 7 3/8" L x 2 3/8" H x 9/16" D
(187 L x 60 H x 14 D mm)

Sign: 13" L x 4 1/2" H
(330 L x 114 H mm)

PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.

Mechanical Specifications

Tandem: Master: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D)
 Slave: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D mm)

Armature: 7 3/8" L x 2 3/8" H x 9/16" D
(187 L x 60 H x 14 D mm)

Sign: 13" L x 4 1/2" H
(330 L x 114 H mm)



PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.



1511S



1511T

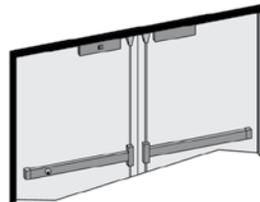

- Voice & Digital Display Standard
- Energy Saver Optional



DELAYED EGRESS OPERATION

NA	NFPA 101, IBC and IFC Compliant Field selectable: 15 or 30 second exit delay; 1 or 2 second nuisance delay Field selectable automatic or manual power-up after emergency release	N/C
NC	IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC Compliant Fixed 15 exit delay, 0/1 second nuisance delay Calif. Building Code OSHPD/Manual Power Up	N/C
ND	IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC Compliant Fixed 15 exit delay, 0/1 second nuisance delay	N/C
BC	BOCA National Building Code and Chicago Building Compliant 15 second fixed exit delay, 0 second nuisance delay, auto reset 30 seconds after door closure	N/C
BD	BOCA National Building Code 15 second fixed exit delay, 0/1 second nuisance delay, auto reset 30 seconds after door closure	N/C





FWAX Special Locking Arrangements
GWXT Auxiliary Locks



UL10C Positive Pressure Compliant
UBC Classified in accordance with
Uniform Building Code standard 7-2
"Fire Test for Door Assemblies"



ANSI/BHMA A156.24
Grade 1



3774-0324:103



1511S

SPECIFY MODEL [] [] [] [] [] **LIST**

1511S	Single - 1,650 lbs., voice, tone and digital countdown annunciator.	1,170.00
1511T	Tandem - 1,650 lbs., voice, tone and digital countdown annunciator.	1,960.00

SPECIFY OPERATION [] [] [] [] []

see codes and description on page 53

SPECIFY BUILT-IN RESET & CONTROL [] [] [] [] []

K	Built in key switch. Provides 1-30 second timed bypass, sustained bypass and alarm reset (<i>std</i>)	N/C
P	Built in reset push switch. Available with NFPA (NC or ND) only.	N/C
L	Less key or push switch (<i>no price deduction</i>)	N/C

SPECIFY FINISH [] [] [] [] [] **Add to List**

Anodized Finishes		Single	Tandem
V	628 Aluminum (<i>standard</i>)	N/C	N/C
Y	335 Black Anodized	80.00	120.00

Powder Coat Finishes (*a coating electrostatically applied to form a hard finish, that is tougher than conventional paint*)

X	Dark Bronze Powder Coat Painted	C	Brass Powder Coat Painted	80.00	120.00
----------	---------------------------------	----------	---------------------------	--------------	---------------

Plated Finishes - Special order, no cancellation, no returns

P	625 Bright Chrome	Q	626 Dull Chrome	190.00	220.00
----------	-------------------	----------	-----------------	---------------	---------------

OPTIONS [] [] [] [] [] **Add to List**

E	Energy Saver, 1200 lbs holding force, low power consumption, electrical specs page 53	N/C
D	Door position status. Provides remote monitoring of the door open or closed status and indicates the door has actually been opened for egress after alarm activation. Specify 2 for tandem	40.00
B	Magnetic bond alert sensor. Indicates locked or unlocked, reduced holding power, tampering or foreign material between the electromagnet and armature. Specify 2 for tandem	60.00
A	Anti-tamper switch. Detects attempt to remove the access cover. Specify 2 for tandem	50.00
VI	Spanish, or English and Spanish, or English and French verbal announcement	100.00
VIC	Custom verbal announcement (<i>10 piece purchase minimum</i>)	POA
101-SP	External 15 watt speaker connects directly to 1511S or 1511T for enhanced decibels on site or remote voice message announcement. Speaker driver may be provided by others for extreme decibel requirements.	36.00
101-SPSN	Remote Single Gang Annunciator with speaker and 80db tone. Duplicates ExitCheck alternating voice message and tone.	96.00
EA100	Multi-Mode Exit Annunciator Bar interfaces with Delayed Egress devices for forced entry or unauthorized exit signaling. Highly visible from any angle, due to multi color LED lights with rolling signal. See also page 58	175.00



Controls & Annunciators
See page 57



101-SP



101-SPSN



EA100



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



FWAX Special Locking Arrangements GWXT Auxiliary Locks

ANSI/BHMA A156.24 Grade 1



3774-0324:103



1581S

1581S Single Mini Delayed Egress Lock 650 lbs. holding force. Current: 320/500 mA @ 24VDC/12VDC 900.00

Specify 2 for pairs of doors Remote reset control required. See below. Lock size 10" L x 2" H x 2.375" D

SPECIFY OPERATION

Operation specification bar

Specify NA, NC, ND, BC, BD see codes and description on page 53

SPECIFY FINISH

Finish specification bar

Add to List

Anodized Finishes

Table with 2 columns: Finish Code, Description, Price. Includes V (628 Clear Anodized Aluminum) and Y (335 Black Anodized).

Powder Coat Finishes

(a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)

Table with 4 columns: Finish Code, Description, Price, and another Description/Price. Includes X (Dark Bronze Powder Coat), D (606 Dull Brass Powder Coat), and C (605 Bright Brass Powder Coat).

Plated Finishes. Special order, no cancellations or returns

Table with 4 columns: Finish Code, Description, Price, and another Description/Price. Includes P (625 Bright Chrome) and Q (626 Dull Chrome).

SPECIFY OPTIONS

Options specification bar

Add to List

Table with 2 columns: Option Code, Description, Price. Includes D (Door position status) and B (Magnetic bond sensor).

TANDEM CABLE FOR PAIR OF DOORS

Tandem cable specification bar

LIST

Required when using two locks on a pair of doors, cables enable slave operation.

Table with 2 columns: Cable Code, Description, Price. Includes 1581S-TC-3 and 1581S-TC-10.

SPECIFY RESET AND CONTROL DEVICE

Reset and control device specification bar

LIST

Select Reset Station for NC and ND functions

Table with 2 columns: Device Code, Description, Price. Includes 918 (EntryCheck™ keypad), 728 (Key switch), 728L3 (Key switch with LED), 702R (Reset key switch assembly), 101-1AK (Key switch assembly), and 101-4AM (Four station remote annunciator).

SDC PUSH UNTIL ALARM SOUNDS. DOOR CAN BE OPENED IN 15 SECONDS.



918



728



702R



101-1AK



101-4AM

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS 801 Avenida Acaso • Camarillo, CA 93012 Email: Service@sdsecurity.com • www.sdsecurity.com



**101 EXIT CHECK® WALL MOUNT DELAYED EGRESS - NFPA 101 LOCKING ARRANGEMENTS GKK****Proprietary Verbal Exit Instructions with Alarm Tone
and 3/4" Digital Countdown Display**

Standard features include: 12/24VDC voltage sensing input, delay electronics packaged on a 3-gang wall plate for recessed wall mounting or surface wall mounting with optional junction box. Features include: std. 15 or 30 second switchable exit delay (NA), 1 or 2 second nuisance delay. Keypad for violation reset, momentary bypass and on-off; Voice Annunciation and digital countdown display with door open indicator. Status and remote control inputs are standard.

12VDC / 24VDC @ 200 mA Max.

- Doors **WITH** latch assemblies are sensor activated and do not require power transfer or trigger switch in exit device. Where preferred a trigger switch may be added to the exit device for manual activation in lieu of door movement activation.
- Doors **WITHOUT** latches require a non-latching Request-to-Exit Bar PSB560 Sure Exit® or MSB550 Switch Bar (see 67). Also compatible with standard EMLocks (see 47.)

"Security Industry Finest"
ISC Expo**SDG****SECURITY DOOR CONTROLS**
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdgsecurity.com • www.sdgsecurity.com**101-DE****DELAYED EGRESS CONTROLLER (1 per opening, single or pairs)**

LIST

101-DE	Wall mount controller with keypad control and reset, 200 mA @ 12/24 VDC - NA standard	795.00
101-KDE	Wall mount controller with both key switch and keypad control and reset, 200 mA @ 12/24 VDC (Mortise cylinder not included)	900.00

For Operations see page 53 - NA operation standard**101-KDE****MAGNETIC LOCK WITH INTEGRATED ACTIVATION SENSOR**

LIST

Specify 2 for pair of doors

1511DEV	Single, 1650 lbs holding force, 670/350 mA @12/24 VDC	505.00
1571DEV	Single, 1200 lbs holding force Energy Saver, 250/125 mA @12/24 VDC	480.00
1581DEV	Single, 650 lbs holding force, 440/220 mA @12/24 VDC	400.00

Outdoor Locks

1575DEU	Single outdoor magnetic lock with magnetic bond sensor	480.00
1576DEU	Single face drilled outdoor magnetic lock with magnetic bond sensor	480.00
1576DE-ZB	Inswing mounting bracket for 1576DEU	150.00

MAGNETIC LOCK FINISH

Add to List

V	628 Clear Anodized Aluminum (Standard)	N/C
Y	Black Anodized	Single 80.00

Powder Coat Finishes*(a coating electrostatically applied to form a hard finish, that is tougher than conventional paint)*

X	Dark Bronze Powder Coat Painted (313/613 Equal)	Single 80.00
----------	---	---------------------

OPTIONAL MONITORING

Add to List

B	Magnetic bond sensor, indicates locked with full holding force, low holding force, unlocked, tampering and obstructions.	60.00
----------	--	--------------

(1581DE SPST only)

D	Door position sensor, indicates door open and door closed. Commonly used to verify egress after alarm and exit delay activation.	40.00
----------	--	--------------

(D) Door position sensor not available with 1581, 1575 and 1576**OPTIONAL HARDWARE**

Add to List

101-1AK	Outdoor reset with LED and Audible annunciator. 2-gang outdoor box required (Interior 101-DE and 1575 or 1576 outdoor magnetic lock required)	320.00
----------------	---	---------------

DEC-J	3 Gang Interior surface mount box for 101-DE	90.00
--------------	--	--------------

SHD-J	Shroud for surface mount box DEC-J outdoor use	60.00
--------------	--	--------------

Mounting Kits & Angle Brackets - See page 49 through 50**SHD-J
End View****101-DE
with DEC-J****101-1AK****DEC-J****SHD-J
with 101-DE**



LOCAL AND REMOTE CONTROLS AND ANNUNCIATORS

LIST

Price List Effective October 1, 2012



918 Keyless Reset and Bypass or Momentary Authorized Access 500 User Codes
Keypad tamper lockout; Indoor blue backlit, moisture resistant keypad **160.00**



918 920 Keyless Reset and Bypass or Momentary Authorized Access 500 User Codes
Heavy Cast Vandal Resistant Housing **175.00**



702R Separate wall mount reset key switch assembly
MO SPDT dry contact, 6 Amp @ 30VDC max.
Accepts standard 1-1/8" to 1-1/4" (*Mortise key cylinder not included*) **110.00**



702R

707R Remote reset key switch with dual function for Bypass (authorized egress) and reset
(2) MO SPDT dry contact, 6Amp @ 30VDC max
Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. (*Mortise key cylinder not included*) **150.00**



707R

708R Remote reset key switch for bypass (on/off) and reset
(1) Maintain (1) MO, SPDT dry contact, 6Amp @ 30VDC max
Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. (*Mortise key cylinder not included*) **150.00**



708R

101-1A

101-1A Remote or local single door annunciator with audible alarm and tricolor LED, 1 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked **105.00**



101-4AM

101-4AM Remote four door annunciator with audible alarm mute button. Four tricolor LEDs, 2 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked **320.00**



101-1AK

101-1AK Remote or local single door annunciator with 2 function key switch for on/off, reset,
audible alarm and tricolor LED, 2 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked
Accepts standard 1-1/8" to 1-1/4" mortise key cylinder.
(*Mortise key cylinder not included*) **320.00**



101-PAM

101-PAM Remote single door annunciator with 3 push button switches for momentary
access. On/off and audible alarm mute button with tricolor LED, 2 Gang
Green- Secure Amber - Egress initiated Red - Door unlocked
Recommended for remote installation only **320.00**



101-SP

101-SP External 15 watt speaker connects directly to 1511S or 1511T for enhanced decibels
onsite or remote voice message annunciation. Speaker driver may be provided by others
for extreme decibel requirements. **36.00**




101-SPSN

101-SPSN Remote Single Gang Annunciator with speaker and 80db tone. Duplicates ExitCheck alter-
nating voice message and tone. **96.00**

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



14 - Delayed Egress & Controllers

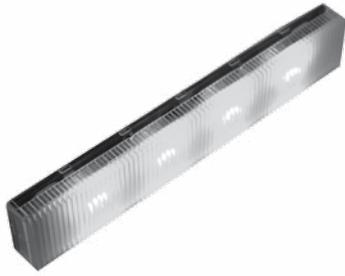

The **SDC Exit Annunciator™** is a highly visible multi-color signal device, that interfaces with Delayed Egress or standard EMLocks, plus many other manufactures electromagnetic locks. and can be used as a wall, ceiling, or frame mount indicator.

Features

- Easy to install
- Suitable for retrofit or new construction
- Multi color LED technology

Specifications

Dimensions:
8-5/8" x 1-1/2" x 3/4"

Electrical:
12/24 VDC @ 160mA
Long life LED output

- Externally selectable color modes of Red, Green, Blue, White, Yellow and Purple
- Externally selectable Solid or Flashing Modes


Brand Compatibility

SDC	Schlage	RCI	Securiton
Rofu	Secolarm	Dynalock	Door King


EA100 Highly visible Annunciator Bar with multiple color LED light featuring rolling signals.

175.00

Stand Alone Multi-Mount

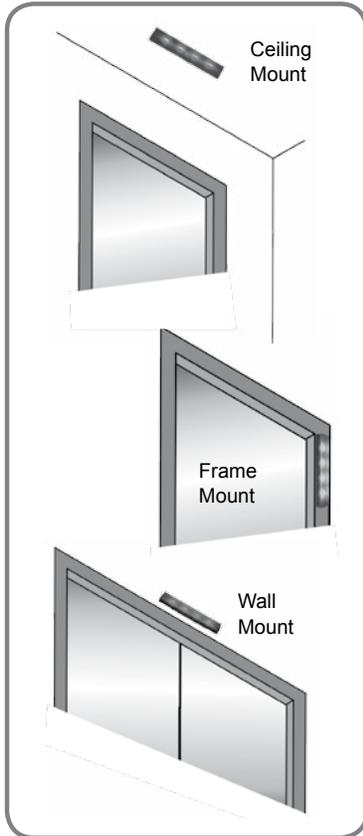

Typical Application

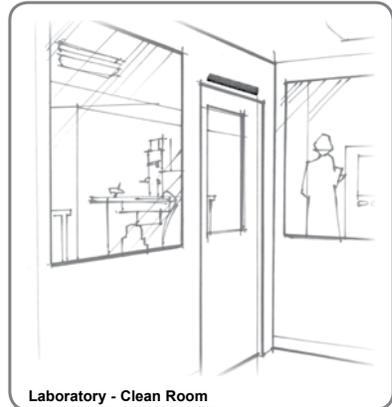



EH Series Magnetic Door Holder & Releasing Device

Distributor Discount Code **V**



NEW

SDC EH Series magnetic door holders, are designed to hold doors open and release the door by remote switch or fire life safety command center activation. Primary application includes holding and releasing of fire rated doors that are required to provide a barrier for fire and smoke in an emergency or the convenience of door closure by remote control.



Specifications:

Materials: Zinc alloy
Voltage: Standard dual voltage AC or DC inputs of 12&24V, 24&120V, 24&220V models
Holding Force: Typical holding force of 25-40 pounds; field selectable high holding force.

Mount: Single or double floor, surface, flush, and recessed mount

Total Projection: Flush mount: 2-11/32" (60mm)
Semi-Flush mount: 3-1/16" (78mm)
Surface mount: 4-5/8" (117mm)
Floor mount (single door): 5" (127mm)
Floor mount (double door): 9-5/8" (244mm)

Fasteners: Hardware package, mounting bracket

Performance Data

Model	Voltage	DC/mA	AC/mA	Terminals	LB.	KG.
1224	12V	40	38	C&L	30	13.6
	24V	40	36	C&H	30	13.6
24120	24V	20	19	C&L	40	18.1
	120V	—	20	C&H	35	15.8
24220	24V	20	19	C&L	40	18.1
	220V	—	15	C&H	25	11.3

HIGH HOLDING FORCE / SPECIAL APPLICATIONS

Model	Voltage	DC/mA	AC/mA	Terminals	LB.	KG.
1224	24V	85	81	C&L	75	34.0
24120	120V	—	100	C&L	110	49.8

To obtain performance values in high holding force table above apply high listed voltage to low voltage terminals (C & L). NOTE: This configuration can only be applied to models 1224 & 24120.

EH10 Flush




EH20 Semi-Flush



EH30 Surface



EH40 Floor, single



EH42 Floor, double



Specify Model

LIST

Model	Description	
EH10	Flush Mount	130.00
EH20	Semi-Flush Mount	100.00
EH30	Surface Mount	145.00
EH40	Floor Mount, Single	188.00
EH42	Floor Mount, Double	235.00

Specify Voltage

Add to List

Voltage	Description	
1224	12/24VAC/DC	N/C
24120	24VAC/DC/120VAC	N/C
24220	24VAC/DC/220VAC	N/C

Specify Finish

Add to List

Finish	Description	
A	Chrome Powder Coat	N/C
P	625 Chrome Plated	P.O.A.
C	605 Brass Plated	20.00

Example: EH20 24120A



EH Series Magnetic Door Holder & Releasing Device Accessories

Distributor Discount Code **V**



Extension Rods LIST

Refer to Figure A to determine correct rod length for each individual openings installation and adjustability requirements

Model	Description	
EHR02	1/2" Extension Rod	20.00
EHR1	1" Extension Rod	20.00
EHR15	1-1/2" Extension Rod	24.00
EHR2	2" Extension Rod	30.00
EHR3	3" Extension Rod	30.00
EHR4	4" Extension Rod	40.00
EHR5	5" Extension Rod	50.00

Adjustable Extension Rod LIST

Model	Description	
EHRA15	1-1/2" Adjustable Extension Rod	24.00
EHRA4	4" Adjustable Extension Rod	40.00

Specify Finish Add to List




Finish	Description	
A	Chrome Powder Coat	N/C
P	625 Chrome Plated	P.O.A.
C	605 Brass Plated	12.00

Options & Accessories LIST

Model	Description	
EHBB	Surface Back Box 2-25/32" x 4-7/8" x 1-1/2" (71mm x 124mm x 38mm) Supplied with EH30, EH40, EH42	40.00
EHCP	Catch Disk Only Replacement for the catch plate assembly	30.00
EHSBA	Catch Plate Assembly	50.00
EHDF	Drilling Fixture Attach to door for quick and accurate hole location	200.00
EHW	Extension Wrenches Used to tighten extension rods to catch plate assembly	5.00

Specify Finish for Surface Back Box EHBB Add to List

Finish	Description	
A	Chrome Powder Coat	N/C
P	625 Chrome Plated	P.O.A.
C	605 Brass Plated	36.00

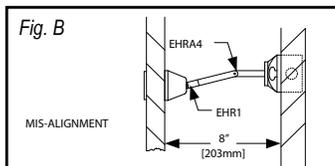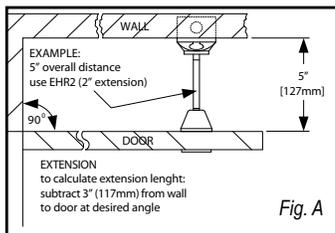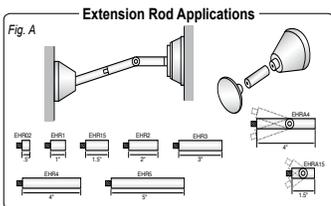

How To Determine Extension Rod & Adjustable Rod Length

Extensions Rod Application: Refer to Fig. A for Aligned Catch Plate and Door Holder
Adjustable Rod Application: Refer to Fig. B for Misaligned Catch Plate and Door Holder

1. Hold door open at desired position.
2. Measure distance between door and wall.
3. Subtract below dimension indicated for door holder style

Flush Mount: Subtract 3" (76mm) from measured distance to determine minimum rod length.
Recessed Mount: Subtract 2-3/8" (60mm) from measured distance to determine minimum rod length.
Surface Mount: Subtract 4-5/8" (76mm) from measured distance to determine minimum rod length.




SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012




621 ACCESS CONTROL POWER SUPPLIES

Distributor Discount Code **NK**



621B

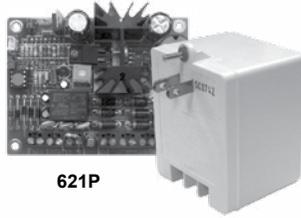

621P



621PJ



621J

2 Control Relays Standard

Features

- 12VDC or 24VDC field selectable output
- 1 Amp maximum, filtered and regulated output
 - 1 power limited or lock control relay output
 - 1 power limited unswitched access control output
- Two control inputs
 - 1 lock control trigger input, normally open (NO)
 - 1 supervised emergency release input (latching w/reset or non-latching)
- Short circuit and thermal overload protection
- Battery charger output

- Automatically switched to battery back-up when AC fails
- Board equipped with AC input, DC output and battery status LED indicator
- Enclosure equipped with AC input, DC output and battery status LED indicator

Dimensions

Power Supply Board: 3.95" W x 3" H x 1.625" D
 Enclosure: 7.25" W x 8.375" H x 3.625" D

MODEL		LIST
621PJ	Power supply module and cabinet, door mount LED system status indicator UL Listed 24VAC, 40 VA plug-in transformer	195.00
621J	Power supply module, cabinet with door mounted LED system status indicator	175.00
621P	Power supply module, retrofit mounting hardware includes flush mount standoffs or Velcro. UL Listed 24VAC, 40 VA plug-in transformer	140.00
621B	Power supply module only, retrofit mounting hardware includes flush mount standoffs or Velcro	120.00



RB12V4
4 Amp Hour



RB12V7
7 Amp Hour

Batteries

RB12V4	12V/4Ah Battery. 621PJ accommodates two.	40.00
RB12V7	12V/7Ah Battery. 621PJ accommodates one.	60.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com



16 - Power Supplies & Door Control Modules



602RF(A)(L) and 631RF(A)(L) tested according to UL Standard 1481, listing includes:
Access Control Systems Unit ALVY
Releasing Device Accessory SYSW
Burglar Alarm Systems Power Supply APHV
Fire and Burglar Alarm Power Supply URTZ

632RF(A)(L) Access Control Systems Unit ALVY
632RF(A)(L), 634RF and 636RF UL listed as:
General Purpose QQFU/QQFU7 Power Supply



602RFL



631RFL



632RFL



602RF / 631RF



632RF


with optional power cord and 2 - CR4 modules



631RFA
632RFA



634RF
636RF



12VR

Standard Features:

- Modular design
- Filtered and regulated output
- Field selectable 12/24VDC
- Fire/Emergency release input
- Field selectable manual reset input (n/a with 631RF(A))



- Input, output and battery LED status indicators
- Thermal and short circuit protection with auto reset
- Battery charger
- Low battery disconnect

FIELD SELECTABLE 12VDC OR 24VDC OUTPUTS

LIST

602RFL	1 Amp, class 2 output, less box	210.00
602RF	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	260.00
602RFA	1 Amp, class 2 output, 16" W x 14" H x 6.5" D box	370.00
631RFL	1.5 Amp, class 2 output, less box	260.00
631RF	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	350.00
631RFA	1.5 Amp, class 2 output, 16" W x 14" H x 6.5" D box	420.00
632RFL	2 Amp, class 2 output, less box	310.00
632RF	2 Amp, class 2 output, 12" W x 12" H x 3.75" D box	400.00
632RFA	2 Amp, class 2 output, 16" W x 14" H x 6.5" D box	460.00
634RF	4 Amp, field select one 4 Amp output, or two 2 Amp class 2 outputs	600.00
636RF	6 Amp, field select one 6 Amp output, or three 2 Amp class 2 outputs	700.00

DUAL 12VDC AND 24VDC OUTPUT CAPABILITY

Add to List

12VR	500mA, 12VDC regulated and filtered output module With the power supply output set at 24VDC for locking devices and components, the addition of the 12VR provides a separate 12VDC 500 mA output for access controls or other 12VDC devices	50.00
------	--	-------

OPTIONS

Add to List

MR	Cover mounted manual reset switch for Fire/Emergency release <i>(not available on 631RF)</i>	36.00
PS-1	System On-Off push switch inside power supply enclosure	36.00
PS-1A	System On-Off push switch on enclosure cover	36.00
14-2	7 day - skip a day programmable timer. Automatically unlocks and locks all doors or specific doors on programmed days only.	240.00
PC	6 ft. power cord. Recommended for 1 Amp and 1.5 Amp, eliminating the need for AC conduit	36.00
KL	Key lock cover	36.00
220V/230V	230VAC, 50/60Hz	N/C






MULTIPLE OUTPUT & DOOR CONTROL MODULE

Distributor Discount Code **NK**




PSM



UR-1



UR2-4




UR4-8



"Security Industry Finest"
ISC Expo



FB-4



ACM-1



CR4



PB-8



RB12V4

RB12V7

7 Amp Hour 7 Amp Hour

POWER SUPPLY MONITORING

LIST

PSM	Power Supply Monitoring Module For remote monitoring of power supply AC input, DC output and battery backup On/Off status. 2 SPDT Relay Outputs, 1 Amp @ 12/24VDC	220.00
------------	--	---------------

UNIVERSAL CONTROLLER & MANTRAP MODULES

LIST

UR-1	Universal Controller for up to 2 doors. 12 Selectable Relay & System Logic Modes. 2 form "A" SPST, N.O. Inputs, 2 form "C" SPST outputs 5 Amps, 12/24 @ 120/175mA.	96.00
UR2-4	Universal Controller for 2 doors. Field select TD, LR, TD/LR, mantrap A, B, C interlock. Two fused SPDT outputs, 5 Amp @ 30VDC. Two SPDT outputs, 5 Amp @ 30VDC. Two inputs per station, four auxiliary inputs.	220.00
UR4-8	Universal Controller for 4 doors. Field select TD, LR, CR, TD/LR, mantrap A, B interlock. Four fused SPDT outputs, 5 Amp @ 30VDC. Four SPDT outputs, 5 Amp @ 30VDC. Two inputs per station, four auxiliary inputs.	310.00

DOOR CONTROL MODULES

LIST

Modules may be ordered with or without power supplies. Different function modules may be used in the same power supply or cabinet. Contacts: 2.5 Amps inductive, 5 Amps resistive @ 30VDC unless specified otherwise.

FB-4	Fused terminal board. 4 individually fused outputs	40.00
ACM-1	Access Control Module. One SPDT voltage output, one SPDT status output, eight trigger inputs, (3N/C, 3N/O), LED status indicator.	90.00
CR4	Control Board with four relays. Four fused SPDT field selectable wet or dry outputs, four non-fused SPDT outputs, 2 Amps @ 30VDC, four dry contact trigger inputs.	165.00
PB-8	Power booster for high inrush electric panic devices and locks. 1 Amp continuous @ 24VDC, 8 Amp surge output.	120.00
PB-16	Power booster for high inrush electric panic devices and locks. 1 Amp continuous @ 24VDC, 16 Amp surge output.	150.00

EXIT DEVICE SEQUENCER

LIST

EMC	Sequencer Module required for pair of doors and automatic doors. 12/24 VDC For use with SDC 602RF and 632RF Power Supplies.	150.00
------------	---	---------------

BATTERIES

LIST

RB12V4	12V/4Ah Battery. Specify in pairs for 24V. 600RF accommodates four.	40.00
RB12V7	12V/7Ah Battery. Specify in pairs for 24V. 600RFA accommodates six	60.00

Cabinet Control Module Capacity

	Number of Batteries	ACM-1	CR	CR-4	FB-4	LR	PB	TD	UR	PSM
12x12	0-2	2	4	2	4	4	2	4	0	1
	3-4	1	2	1	2	2	2	2	0	1
16x14	0-2	4	8	4	4	8	6	8	2	1
	3-6	2	6	2	2	4	4	4	1	1

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



16 - Power Supplies & Door Control Modules



DC Regulated Power Supplies



Distributor Discount Code **V** **LIST**



TR12 1 Amp 12VDC Regulated Plug-In Power Supply **72.00**

- Thermal overload protection
- LED Power status indicator
- Secondary connection: Screw terminals
- Primary Input: 120VAC
- UL Listed, Class 2



TR24 1 Amp 24VDC Regulated Plug-In Power Supply **74.00**

- Thermal overload protection
- Secondary connection: 6ft wire leads
- Primary Input: 120VAC
- UL Listed, Class 2



TRANSFORMERS



Distributor Discount Code **V** **LIST**



FB4DC AC to 4 DC Fused Output Module. One (1) AC input, 12 or 24VAC 4.2 Amp max. Four (4) Fused DC outputs (4) Fuses, 2 Amps. Combined load of all outputs 4.2 Amps max. **60.00**

- Onboard, 4-way bridge rectifier converts AC input to DC output. 4 retrofit PCB standoffs.
- Compatible SDC transformers: TJ2440, TP2420, TP2440, TB2475
- Transformers by others: 12VAC @ 50VA (4.2 Amps); 24VAC @ 100VA (4.2 Amps)
- Dimensions: 3.25 x 2" (83 x 51mm)



TP1220 1.6 Amp 12VAC Plug-In Transformer **20.00**

- Thermal overload protection
- Secondary connection: Screw terminals
- Thermal overload protection
- Primary Input: 120VAC
- UL Listed, Class 2



TP2440 1.6 Amp 24VAC Plug-In Transformer **36.00**

- Thermal overload protection
- Secondary connection: Screw terminals
- Thermal overload protection
- Primary Input: 120VAC
- UL Listed, Class 2



TJ2440 1.6 Amp 24VAC Transformer, Foot Plate or Knockout Mount **46.00**

- Includes 4 x 4 inch mounting plate for 2 x 4 inch or 4 x 4 inch outlet box, mounting feet for surface mount., clamp for outlet box knockout
- Secondary connection: Screw terminals
- Primary Input: 120VAC, wire leads
- UL Listed, Class 2



TB2450 2 Amp 24VAC Transformer, Foot Plate or Hub Mounted **60.00**

- Push button reset circuit breaker protection
- Secondary connection: 9" wire leads
- Primary Input: 120VAC/240VAC, 9" wire leads x hub
- UL Listed, Class 2



TB2475 3 Amp 24VAC Transformer, Foot or Hub Mounted **90.00**

- Push button reset circuit breaker protection
- Secondary connection: 9" wire leads
- Primary Input: 120VAC/240VAC, 9" wire leads x hub
- UL Listed, Class 2

BR64XL Bridge Rectifier, 6" wire leads. Converts AC transformer output to DC **25.00**



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012

POWER SUPPLY CAPACITY CHART

EMLOCK ELECTROMAGNETIC LOCKS	VOLTS	AMPS	602RF 621 1 AMP	631RF 631RFA 1.5 AMP	632RF 632RFA 2 AMP	634RF 4 AMP	636RF 6 AMP
1511 SINGLE	12VDC 24VDC	.70A .35A	1 2	2 4	2 5	5 11	8 17
1512 DOUBLE	12VDC 24VDC	1.40A .70A	0 1	1 2	1 2	3 5	4 8
1561, 1562	12VDC 24VDC	.65A .35A	1 2	2 4	3 5	6 11	9 17
1565, 1566	12VDC 24VDC	.80A .40A	1 2	1 3	2 5	5 10	7 15
1571 ENERGY SAVER	12VDC 24VDC	.25A .125A	4 8	6 12	8 16	16 31	24 48
1572 ENERGY SAVER	12VDC 24VDC	.50A .25A	2 4	3 6	4 8	8 16	12 24
1575, 1576	12VDC 24VDC	.45A .225A	2 4	3 6	4 8	8 16	12 24
1581 SINGLE	12VDC 24VDC	.44A .22A	2 4	3 6	4 6	9 18	13 27
1582 DOUBLE	12VDC 24VDC	.88A .44A	1 2	1 3	2 4	4 9	6 13
EXIT CHECK INTEGRATED DELAYED EGRESS EMLOCKS							
1581S	12VDC 24VDC	.50A .32A	2 3	3 4	4 6	8 11	12 18
1511S	12VDC 24VDC	.83A .45A	1 2	1 3	2 4	4 8	6 12
1511T	12VDC 24VDC	1.56A .92A	0 1	0 1	1 2	2 4	3 6
1511S With (E) Energy Saver Option	12VDC 24VDC	.40A .275A	2 3	3 5	5 7	10 14	15 21
1511T With (E) Energy Saver Option	12VDC 24VDC	.65A .40A	1 2	2 3	4 5	6 10	9 15
EXIT CHECK EMLOCK WITH WALL MOUNT CONTROLLER							
101-DE x 1511DE	12VDC 24VDC	.85A .53A	1 1	1 2	2 3	4 7	7 11
ENERGY SAVER 101-DE x 1571DE	12VDC 24VDC	.43A .31A	2 3	3 4	4 6	9 12	13 19
101-DE x 1581DE	12VDC 24VDC	.62A .40A	1 2	2 3	3 5	6 10	9 15

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



POWER SUPPLY CAPACITY CHART (continued)

HITOWER ELECTRIC LOCKS	VOLTS	AMPS	602RF 621 1 AMP	631RF 631RFA 1.5 AMP	632RF 632RFA 2 AMP	634RF 4 AMP	636RF 6 AMP
7200	12VDC 24VDC	.60A .30A	1 2	2 5	3 6	6 13	10 21
7500 FAIL SAFE	24VDC	.50A	2	3	4	8	12
7500 FAIL SECURE	24VDC	.80A	1	1	3	5	7
7800	12VDC 24VDC	.60A .30A	1 2	2 5	3 6	6 13	10 20
SPACESAVER ELECTRIC BOLT LOCKS							
100,1000, FS	12VDC 24VDC	.90A .45A	1 2	1 3	2 4	4 8	6 12
1100	24VDC	.50A	2	3	4	8	12
1200	12VDC 24VDC	.90A .45A	1 2	1 3	2 4	4 8	6 12
2000	24VDC	2.5A InRush .4A Cont.	1 1X-PB	*2 1XPB-8	*4 2XPB-8	*6 3XPB-8	*8 4XPB-8
ELECTRIC STRIKES							
15	12VDC	.20A	4	7	10	20	30
25	12VDC 24VDC	.30A .15A	3 6	5 10	6 13	13 26	20 40
30	12VDC 24VDC	.51A .25A	1 4	2 6	3 8	7 16	11 24
45	12VDC 24VDC	.28A .14A	3 6	5 10	6 13	13 26	20 40
EXIT DEVICES							
E Electric Latch Retraction with 1 EMC Sequencer with 2 EMC Sequencers	24VDC	.5A	2 2	2 2	4 4	8	12
B Exit Alarm	12VDC 24VDC	.100A .100A	10 10				
M Electric Mortise Device	12VDC 24VDC	.6A .3A	1 3	2 5	3 6	6 13	10 20





Distributor Discount Code

SURE EXIT® SENSE BAR DKK

PUSH TO EXIT

Field Applied Sign with green letters



Listed 4J82

Access Control System Units
Burglary Resistant Electronic Locking Mechanism



3773-0324:105



"Security Industry Finest"
ISC Expo

Standard Features

Actuation: Pressure Sense Technology; Tri-Failsafe

Voltage: 12/24VDC Voltage Sense Input

Current: 20 mA at Rest, 115 mA Active

Lock Output: SPDT, 3 Amp @ 30VDC

Alarm Shunt/Status Output: SPDT, 3 Amp @ 30VDC

Accessories Include: 10 ft. cable and connector; PT-2U Armored Power Transfer Loop

Standard length, 36"

MODEL	FINISH	LIST PRICE
PSB560V	628 Aluminum Anodized	350.00
PSB560Y	Black Anodized	350.00
PSB560S	629 Bright Stainless Steel	475.00
PSB560U	630 Brushed Stainless Steel	475.00

Bars for wide doors

42	Bar for 42" Door. May be field cut.	N/C
48	Bar for 48" Door. May be field cut. Ex: PSB560V-42	N/C



PT-2U
(Included with bar)



PT3

ACCESSORIES

	LIST
500GL-KIT One glass door mounting kit with adhesive for eight to ten bars	235.00
500GL-MB One glass door mounting kit without adhesive	130.00
500-SK Shim kit used to raise bar from door. Recommended for wood or hollow metal doors with uneven mounting surface.	24.00

Power Transfer:

PT-3V Stainless steel armored loop with aluminum surface wire junction box	45.00
---	-------



Distributor Discount Code

EXIT MECHANICAL SWITCH DK

PUSH TO EXIT

Field Applied Sign with green letters



Listed 4J82

Access Control System Units
Burglary Resistant Electronic Locking Mechanism



3773-0324:106

Standard Features

Actuation: 1/8" total bar movement for mechanical switch actuation

Contact: SPDT, 5 Amp @ 30VDC (2nd switch optional)

Accessories include: PT-2U Power Transfer Loop

Standard length, 36"

MODEL	FINISH	LIST PRICE
MSB550V	628 Aluminum Anodized	225.00
MSB550Y	335 Black Anodized	225.00
MSB550S	629 Bright Stainless Steel	360.00
MSB550U	630 Brushed Stainless Steel	360.00

2 SPDT Contacts


ADD 30.00

Add "2" for 2nd mechanical switch for dual-failsafe redundant operation; alarm shunt; or monitoring output. Ex: MSB550-2V


Bars for wide doors

42	Bar for 42" Door. May be field cut.	N/C
48	Bar for 48" Door. May be field cut. Ex: MSB550V-42	N/C


Standard Installation with standard mounting hardware

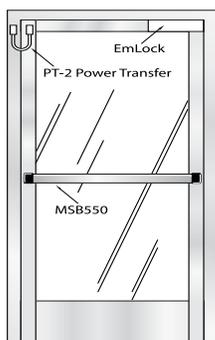


500GL Kit Glass Mount Installation

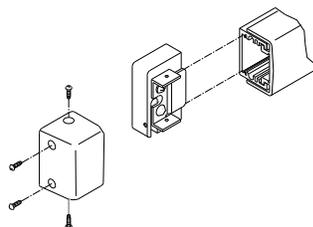

1. Assemble kit

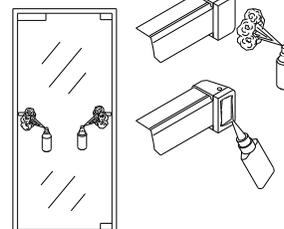

2. Apply Adhesive

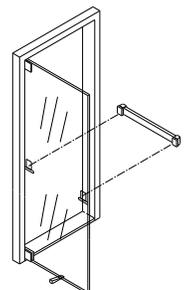

3. Mount





EXIT DEVICE SWITCH KITS

Distributor Discount Code **DK**

APPLICATION

- Activation of delayed egress locks
- Request-to-Exit
- Electromagnetic Lock Release
- Alarm Shunt or Alarm Activation

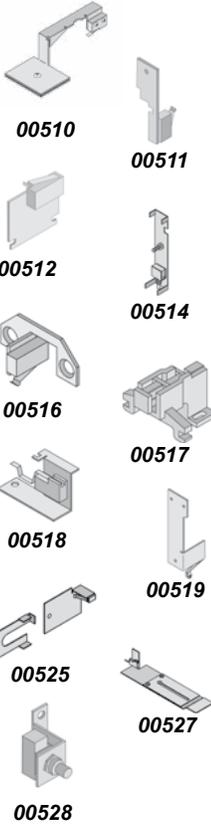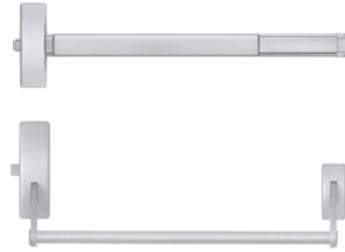

SWITCH KITS LIST

Switch Kits are field installed in the inactive hinge pad of an exit device to provide instantaneous release of EmLocks for egress. All kits include a SPDT Switch Assembly with wire leads. 5 Amp @ 30VDC.

MODEL	MAKE & MODEL TO BE MODIFIED		MODEL	MAKE & MODEL TO BE MODIFIED	
00510	Von Duprin 33, 35, 98, 99	150.00	00525	Monarch 18 and 19	150.00
00510-2	Von Duprin 33, 35, 98, 99 DPDT	185.00	00525-2	Monarch 18 and 19	185.00
00511	Von Duprin 55	150.00	00526	Corbin ED8200	150.00
00512	Von Duprin 88	150.00	00527	Sargent 80, Arrow S3800/S1250	150.00
00514	Dor-O-Matic 990, 1090, 1990, 2090	150.00	00527-2	Sargent 80 DPDT	185.00
00515	Sargent 9300, 9400, 9500	150.00	00528	Sargent 20/60 and Yale 2100	150.00
00516	Sargent 9600, 9700, 9800, 9900	150.00	00531	Yale 7000 (Dogging mechanism required) Corbin 4000/5000	150.00
00517	Adams Rite 8300, 8400, 8700, 8800	150.00	00535	Kawneer Mid Panel Line Dor-O-Matic 1390	150.00
00518	Precision Series 1100	150.00	00536	Jackson 1295	150.00
00518A	Precision Apex Series (2100 - 2800)	150.00	00539	Cal Royal 9800 Series	150.00
00519	Jackson 1095	150.00	00542	Hager 4700	150.00
00519-2	Jackson 1095 DPDT	185.00	00590	Dor-O-Matic 1690	150.00
00520	Corbin 3000	150.00			
00521	Corbin 7000	150.00			

NOTE: Consult factory for Exit Device Switch Kits not shown. Modification of any kind to a UL Listed device may void UL Listing.

18 - Switch & Status Kits




SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com



LATCH AND DEADBOLT MONITORING STRIKE KITS

Distributor Discount Code **DK** List

Provides latch and or deadbolt position status. Compatible with deadbolts, cylindrical locks, mortise locks, and mortise locks with latch and deadbolt. Strike plates shown provided by others.

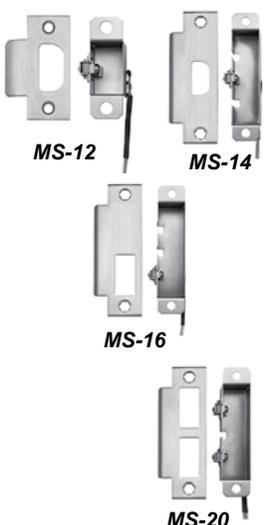

5 Amp @ 30 VAC/DC

MS-12	Cylindrical latch monitor 2-3/4" SPDT	130.00
MS-12D	Cylindrical latch monitor 2-3/4" DPDT	160.00
MS-14	Cylindrical latch monitor 4-7/8" SPDT	130.00
MS-14D	Cylindrical latch monitor 4-7/8" DPDT	160.00
MS-16	Mortise lock latch monitor SPDT	130.00
MS-16D	Mortise lock latch monitor DPDT	160.00
MS-18	Mortise lock deadbolt monitor SPDT	130.00
MS-18D	Mortise lock deadbolt monitor DPDT	170.00
MS-20*	Mortise lock latch and deadbolt monitor SPDT	160.00
MS-20D*	Mortise lock latch and deadbolt monitor DPDT	215.00

*MS-20 and MS-20D are handed but reversible



KEY SWITCHES


Distributor Discount Code **CK**

Key Cylinder sold separately: **MO** - Momentary **AA** - Alternate Action (on-off)
 Key switch assemblies compatible with 1.125" and 1.25" U.S. standard mortise cylinders (not included).

Price List Effective October 1, 2012



See Options below



6 AMP KEY SWITCH ASSEMBLIES

20 Gauge Stainless Steel Faceplate					Contacts
1 Gang	Narrow	List	2 Gang	List	
701	701N	95.00	701T	120.00	AA SPDT
702	702N	95.00	702T	120.00	MO SPDT
704	704N	170.00	704T	190.00	1-60 Timer SPDT
705	705N	110.00	705T	130.00	AA DPDT
706	706N	105.00	706T	125.00	MO DPDT
707	707N	125.00	707T	145.00	2 MO SPDT
708	708N	130.00	708T	150.00	1 MO SPDT & 1 AA SPDT
709	709N	140.00	709T	160.00	2 AA SPDT
710	710N	190.00	710T	215.00	1-60 Timer & AA SPDT
711	711N	145.00	711T	165.00	2 MO DPDT
712	712N	145.00	712T	165.00	1 MO DPDT & 1 AA DPDT
713	713N	145.00	713T	165.00	2 AA DPDT

1/4" Thick Aluminum Plate				Contacts
1 Gang	Narrow	List		
801AL	801ALN	140.00		AA SPDT
802AL	802ALN	140.00		MO SPDT
804AL	804ALN	215.00		1-60 Timer SPDT
805AL	805ALN	160.00		AA DPDT
806AL	806ALN	160.00		MO DPDT
807AL	807ALN	180.00		2 MO SPDT
808AL	808ALN	180.00		1 MO SPDT & 1 AA SPDT
809AL	809ALN	180.00		2 AA SPDT
810AL	810ALN	255.00		1-60 Timer & AA SPDT
811AL	811ALN	205.00		2 MO DPDT
812AL	812ALN	205.00		1 MO DPDT & 1 AA DPDT
813AL	813ALN	205.00		2 AA DPDT

SPECIFY FINISH Add to List

U 630 Dull Stainless Steel (Standard For All Key Switches Except The 800AL)	N/C
AL 628 Anodized Aluminum (Standard For The 800AL Key Switch Only)	N/C
Plated finishes, special order, no cancellation, no return	
C 605 Bright Brass 40.00	H 613 Oil Rubbed Bronze 40.00
D 606 Dull Brass 40.00	P 625 Bright Chrome 40.00

OPTIONS Add to List

10TD Mini timer, adj. 1-60 second 12/24VDC, SPDT 80.00	LT One tricolor LED. Red, green and amber 30.00
CYL-KD 1 1/8" Key cylinder with 2 keys (keyed differently) 25.00	ATS Anti-tamper sensor, SPDT 30.00
L1 One LED. Specify red or green 20.00	RMB Buzzer, 12 or 24VDC, 20mA 40.00
L2 Two LEDs. Red, and green 30.00	SN 85 db siren, 4V-25VDC, 15mA 50.00

RETROFIT BACK BOX

BB1D Single Gang 2.25" w x 3.75" h x 2.75" D	12.00
---	--------------



BB1D

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com



19 - Key Switches



SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



EXIT SWITCHES

Distributor Discount Code **CK**

410 SERIES - 1-3/4" x 1" EXIT SWITCH

OPTIONS - See 72

Distributor Discount Code **CK** List

1 3/4" x 1" Button - Green and Red Illuminated Lens included - Dull Stainless Steel finish



412N
413N
414N

Narrow	Contact	Sign	
412NU	Momentary SPDT	PUSH TO EXIT	70.00
413NU	Integrated electronic timer, adj. 1-60 sec. 12/24VDC, 2A DPDT Contact	PUSH TO EXIT	135.00
413PNU	Integrated pneumatic timer, adj. 1-180 sec. 12/24VDC, SPDT 3 Amp Contact	PUSH TO EXIT	320.00
414NU	Momentary DPDT	PUSH TO EXIT	85.00
415NU	AA (On/Off) DPDT	NONE	105.00

420 SERIES - 2" EXIT SWITCH

OPTIONS - See 72

Distributor Discount Code **CK** List

2" Button, Green and Red Illuminated Lens included - Dull Stainless Steel Finish



422
423
424



422A
423A

1 Gang	Contact	Sign	
422U	Momentary SPDT	PUSH TO EXIT	70.00
422AU	Momentary SPDT	♿ Symbol	70.00
423U	Integrated electronic timer, adj. 1-60 sec. 12/24VDC, 2A DPDT Contact	PUSH TO EXIT	135.00
423PU	Integrated pneumatic timer, adj. 1-180 sec. 12/24VDC, SPDT 3 Amp Contact	PUSH TO EXIT	320.00
423AU	Integrated 1-60 sec Timer 12/24VDC, 2A DPDT Contact 2" Button - Blue illuminated lens only	♿ Symbol	135.00
424U	Momentary DPDT	PUSH TO EXIT	105.00
425U	AA (On/Off) DPDT	NONE	105.00

CODE COMPLIANT MANUAL RELEASE DEVICES

Distributor Discount Code **CK** List

Code Compliant Manual Releasing Devices and Sensors

423M and 413MN exit switches USED TOGETHER WITH the MD31D PIR sensor comply with manual releasing device and sensor device requirements for Access-Controlled Egress Doors per:

IBC International Code 1008.1.3.4 NFPA 101 7.2.1.62 BOCA National Building Code 1017.4.5
IFC International Code 1008.1.3.4 NFPA 1 15.5.3.2 SBCCI Standard Building Code 1012.7

Code Compliant Manual Release Device

Code Compliant Features: Fixed 30 second timer, re-triggerable; Failsafe - lock releases when power to switch is interrupted; Sign - PUSH TO EXIT; CSFM Listed;

1 1/4"x1" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens



413MN



423M

Narrow	Contact	Sign	
413MNU	Integrated Fixed 30 sec. Timer 12/24VDC, 2 Amp Contact	PUSH TO EXIT	140.00

2" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

1 Gang	Contact	Sign	
423MU	Integrated Fixed 30 sec. Timer 12/24VDC, 2 Amp Contact	PUSH TO EXIT	140.00

Code Compliant Egress Sensor

Code Compliant Features: PIR egress sensor with failsafe mode - lock releases when power to PIR sensor is interrupted. UL listed 294 Access Control System Units

Model	Color		
MD-31DOW	White	PIR Egress Sensor	V 235.00
MD-31DB	Black	PIR Egress Sensor	V 235.00

Input: 12 or 24 VAC/DC @ 26mA max.

Contact: 2 SPDT Dry, 2 Amp @ 30VDC (38.1 H x 148.8 W x 38.1 D mm)

Operating temp: -20° F to 120° F (-29° C to 49° C)

Dimensions: 1.5" H x 6.25" W x 1.5" D

RETROFIT BACK BOX

BB1D	Single Gang 2.25" w x 3.75" h x 2.75" D	12.00
-------------	---	--------------



BB1D

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com



20 - Exit Switches & Egress



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012




430 SERIES - 1-1/2" MUSHROOM EXIT SWITCH					Distributor Discount Code	CK	List
1.5" Mushroom, Green Button Standard, Dull Stainless Steel Finish, Specify R For Optional Red Button							
1 Gang	Narrow	2 Gang	Contact	Sign			
431CU	431CNU		AA (On/Off) NC SPST	none			110.00
431OU	431ONU		AA (On/Off) NO SPST	none			110.00
432CU	432CNU		Momentary NC SPST	EXIT			110.00
432OU	432ONU		Momentary NO SPST	EXIT			110.00
432KUR	432KNUR		Latching/ key reset DPST, Red	none			215.00
		433U	Momentary with Timer Module 1-60 sec. 12/24V AC/DC SPDT 2A Contact	EXIT			205.00
434U	434NU		Momentary DPST	EXIT			135.00
435U	435NU		AA (On/Off) DPST	none			135.00



440 SERIES - 2-5/8" MUSHROOM EXIT & PANIC SWITCHES					Distributor Discount Code	CK	List
2-5/8" Mushroom, Red Button Standard, Dull Stainless Steel Finish, Specify G For Optional Green Button							
1 Gang	2 Gang	Contact	Sign				
	441U	AA (On/Off) DPST	none				190.00
	442U	Momentary DPST	EXIT				190.00
	443U	Momentary with Timer Module 1-60 sec. 12/24V AC/DC SPDT 2A Contact	EXIT				275.00
	444U	Momentary 2-DPST	EXIT				210.00
446U		Momentary DPST	EXIT				125.00



450 SERIES - VANDAL RESISTANT ALUMINUM EXIT SWITCH					Distributor Discount Code	CK	List
Stainless Steel Button - 1/4" Thick Aluminum Plate - Security Screws - Plated Finish Not Available							
1 Gang	Narrow	Contact	Sign				
451V	451NV	AA (On/Off) SPDT	none				150.00
452V	452NV	Momentary SPDT	none				150.00
453PV	453PNV	Integrated Pneumatic Timer ADJ. 1-180 sec. SPDT contact	none				425.00



463 SERIES - VANDAL RESISTANT STAINLESS STEEL EXIT SWITCH					Distributor Discount Code	CK	List
Piezoelectric Stainless Steel Button - No moving parts - Integrated Time Delay - Red and Green Status Indicators 2mm Stainless Steel - Security Screws - Plated Finish Not Available							
1 Gang	Narrow	Contact	Sign				
463U	463NU	Integrated 1-30 Sec Timer 12/24VDC, NO/NC 2A Contact	PUSH TO EXIT				130.00



470 SERIES - SANITARY, NO TOUCH, WAVE-TO-EXIT SWITCH					Distributor Discount Code	CK	List
<ul style="list-style-type: none"> IR Sensor, 4" read range, Red, Green illuminated LED status. Control electric locks, strikes and automatic door operators. Entry/exit for sanitary environments including: bathrooms, hospitals, schools, cleanrooms, food processing, labs, or offices. Output: DPDT 3 Amp Dry Contact • Input: 25mA (standby); 55mA (active) @ 12/24VDC • Faceplate: 20ga stainless steel 							
	Contact	Sign					
474U	DPDT	No Touch Exit					75.00
474DU	DPDT	No Touch Exit					130.00



OPTIONS AND FINISHES					Distributor Discount Code	CK	Add to List
Options for 410, 420, 430, 440 Series							
L1G	1 Green LED	20.00	LT	Tricolor LED - Red, Green, Amber			30.00
L1R	1 Red LED	20.00	E	Add Exit sign To AA Function Switch Only			10.00
L2	1 Red and 1 Green LED	30.00	B	No Exit sign (None) with Momentary Switch			N/C

Special Finish
 450 / 460 / 470 Special finish is not available
 Designate special finish suffix from below in lieu of U (stainless steel) in part number.

C	605 Bright Brass	D	606 Dull Brass	40.00
P	625 Bright Chrome	H	613 Oil Rubbed Bronze	40.00



480 SERIES PUSH PLATE SWITCHES - WIRELESS AND HARDWIRED

Distributor Discount Code **CK List**

For Handicap Access, Automatic Door Activation & Request-to-Exit Applications

- Door Opener Activation
- Access Control Request-to-Exit (RTE)
- Automatic Door Activation
- Door Sequencer Activation

FEATURES

Mounting Plate: Heavy Duty 1/8" (3.2mm) mounting plate

Faceplate: Heavy 18 Gauge (1.02mm), 630/US32D Satin Stainless Steel Standard

Legends: Bold debossing or engraving with black, blue or white infill

Contacts: SPDT or DPDT, 15 Amps @ 125/250VAC; UL 1054, CSA Listed

Depth: [Narrow & (1) Gang] SPDT-7/8" deep, DPDT-1-3/8" deep, [4 1/2", & 6" square/ round] SPDT-3/4" deep, DPDT-1-5/32 deep



= can be used with wireless transmitter and receiver



Price List Effective October 1, 2012



1-11/16" Narrow Mullion Push Plate Switch – Recessed, Surface Box or Bollard Mount

SPDT Model	Description	DPDT Model	Description
482O1U	Push to Open, black infill	484O1U	Push to Open, black infill
482A1U	♿ Push to Open, blue infill	484A1U	♿ Push to Open, blue infill
400-1B	Narrow Mullion Surface Box, 1-3/4" x 4-9/16" x 1-3/4" O.D.		18.00



2 3/4" x 4 1/2" Single (1) Gang Push Plate Switch

- Pressing any part of the push plate (2 3/4" x 4 1/2") causes switch actuation
- Recessed, Surface Box or Bollard Mount
- Depth: SPDT - 3/4" deep; DPDT - 1 1/2" deep

SPDT Model	Description	DPDT Model	Description
482O2U	Push to Open, black infill	484O2U	Push to Open, black infill
482A2U	♿ Push to Open, blue infill	484A2U	♿ Push to Open, blue infill
480-2SB	Surface mount box, 2 3/4" x 4 1/2" x 1 5/8" O.D.		28.00



4 1/2" x 4 1/2" Square Push Plate Switches

- Pressing any part of the push plates 4" 1/2" x 4 1/2" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description
482O4U	Push to Open, black infill	484O4U	Push to Open, black infill
482A4U	♿ Push to Open, blue infill	484A4U	♿ Push to Open, blue infill
480-4FB	Square Flush Recessed box, 1-gang, 6 3/4" x 6 3/4" x 1 7/8" O.D.		60.00
480-4SBB	Surface mount box, 4-1/2" x 4-1/2" x 1 3/4" O.D. with Battery compartment for wireless		31.00
480-4SB	Surface mount box, 4-1/2" x 4-1/2" x 1 7/8" O.D.		60.00
480-4SE	3-sided stainless shroud for exterior applications, 4-11/16" x 4-7/8" x 12"		36.00



6" x 6" Square Push Plate Switch

- Pressing any part of the push plates 6" x 6" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description
482O6U	Push to Open, black infill	484O6U	Push to Open, black infill
482A6U	♿ Push to Open, blue infill	484A6U	♿ Push to Open, blue infill
480-6SBB	Surface mount box, 2-gang Battery Compartment, 4 1/2" x 4 1/2" x 1 3/4" O.D.		31.00



4 1/2" Round Push Plate Switch

- Pressing any part of the push plates 4" 1/2" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description
482O4RU	Push to Open, black infill	484O4RU	Push to Open, black infill
482A4RU	♿ Push to Open, blue infill	484A4RU	♿ Push to Open, blue infill
480-4RSB	Surface box, 5" Dia., 2 1/8" O.D.		54.00
480-4RFB	Black Flush Escutcheon, 5 7/8" overall diameter with trim ring		60.00
480-4RG	4" round gasket		14.00
480-4RRB	Surface Escutcheon, 7 7/8" Dia., 1 9/16" overall height		60.00



6" Round Push Plate Switch

- Pressing any part of the push plates 6" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount
- Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

SPDT Model	Description	DPDT Model	Description
482O6RU	Push to Open, black infill	484O6RU	Push to Open, black infill
482A6RU	♿ Push to Open, blue infill	484A6RU	♿ Push to Open, blue infill
480-6RSB	Surface box Round, 6 7/16" Dia., 2 1/8" O.D.		54.00
480-6RFB	Recessed Flush Escutcheon, 7 3/4" overall diameter with trim ring		60.00
480-6RG	6" round gasket		14.00

SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012

Email: Service@sdsecurity.com • www.sdsecurity.com



20 - Exit Switches & Egress



480 SERIES TOUCH PANEL COLUMN - WIRELESS & HARDWIRE

Distributor Discount Code **CK**

Applications

- Wireless & Hardwire
- ADA Ingress/R.E.X/Egress Door Opener Activation
- Access Control Request-to-Exit (REX)
- Door Opener Activation
- Automatic Door Activation or Lock Release
- Automatic Door & Exit Device Sequencer Activation



= can be used with wireless transmitter and receiver



Features

- Surface wall mount or bollard mount
- Sleek Architectural profile
- No square edges to snag, wide sloping sides deflects impact movement naturally to activate column
- Deflects impact from wheeled carts and conveyances
- Impact & Vandal resistant design, inhibits prying, tampering
- Weather Resistant, no gaps for water or ice penetration
- Choice of SPDT or DPDT, 15 Amps @ 125/250VAC



9" X 6" INGRESS-R.E.X TOUCH PANEL COLUMN

List

Fully Active 22-1/2 Sq. Inch Actuation Area
Recommended Centerline mounting height 34" to 48"

Material: Sturdy 1/8" extrusion with architectural finish
Overall Size: 9" h x 6" w x 1-1/2" d (229 x 152 x 38mm)
Active Area: 9" h x 2-1/2" w (229 x 63.5mm)

SPDT Model	Description	DPDT Model	Description
482AA9	Push to Open	282.00	484AA9 Push to Open
			297.00

SPECIFY FINISH

Add to List

V 628 Aluminum (standard), blue infill	N/C	X 613 Dark Bronze, white infill	24.00
--	-----	---------------------------------	-------



36" X 6" INGRESS-R.E.X TOUCH PANEL COLUMN

List

Fully Active 90 Sq. Inch Actuation Area
Recommended mounting height is 3" from floor

Material: Sturdy 1/8" extrusion with architectural finish
Overall Size: 36" h x 6" w x 1-1/2" d (914 x 152 x 38mm)
Active Area: 36" h x 2-1/2" w (914 x 63.5mm)

SPDT Model	Description	DPDT Model	Description
482AA36	Push to Open	390.00	484AA36 Push to Open
			415.00

SPECIFY FINISH

Add to List

V 628 Aluminum (standard), blue infill	X 613 Dark Bronze, white infill	N/C
--	---------------------------------	-----



400 SERIES WIRELESS TRANSMITTER AND RECEIVER

Distributor Discount Code **CK** List

For Remote Control Versatility for Touch Panel Column and Push Plate Switches

433MHz Micro Transmitter

- Requires a non-metallic surface box or standard bollard cap (non-metallic). Works with 400RC433
- Pre-Wired for quick installation
- Antenna magnifies signal

- **Voltage Input:** 9V Battery (included)
- **Trigger Input:** Momentary, N.O.Dry Contact
- **Temperature:** -20F — 100F
- **Dimensions:** 1-9/64" x 15/16" x 7/32" (29 x 49 x 6mm)




Model	Description
400W1-433	433MHz Micro Transmitter
	72.00

433MHz 1 Channel Nano Receiver

- Designed to control automatic closing and anti-burglar systems. Works with 400W1-433.
- **Carrier Frequency:** 433.92 MHz
- **Relay Numbers:** 1
- **Temperature:** -4F — 158F
- **Power Supply:** 12/24 VAC/DC
- **Contacts:** C-NO
- **Dimensions:** 1-1/4" x 2" x 3/4" Deep (32 x 51 x 19mm)

Model	Description
400RC433	433MHz 1 Channel Receiver
	85.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



EMERGENCY DOOR RELEASE

Distributor Discount Code **V** List

SDC 490 series emergency door release stations include 2-SPDT contacts for release of all doors on the same circuit and remote annunciation. A built-in local alarm is standard.




492




491

491	Blue break glass station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass included. Single gang box mounted	184.00
491-GL4	Four replacement glass plates for 491	20.00
491-BB	Blue surface mount box for 491	60.00
492	Blue pull station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass rods included. Single gang box mounted.	150.00
492-GL4	Four replacement glass rods for 492	20.00
492-BB	Blue surface mount box for 492	40.00



EMERGENCY ACCESS PANEL

Distributor Discount Code **CK** List



APB1000A	Emergency access panel for lobby door system. Mushroom button with key reset and siren	350.00
-----------------	--	---------------



SIRENS AND BUZZERS

Distributor Discount Code **CK** List



400-SN



400-RMB

Standard Finish 630 Stainless Steel

400U-RMB	Buzzer on 1 gang plate. Specify 12/24VDC, 20mA max	45.00
400NU-RMB	Buzzer on narrow plate. Specify 12/24VDC, 20mA max	45.00
400U-SN	Siren on 1 gang plate, 3 - 28VDC, 18mA max	55.00
400NU-SN	Siren on narrow plate, 3 - 28VDC, 18mA max	55.00



COMMUNICATING BATHROOM CONTROLS

Distributor Discount Code **CK** List



CB401-A
CB402-A



CB401-B
CB402-B

EmLock®, Selectric®, Electra™ or HiTower®

CB401-AU	Communicating bath switch, 630 Stainless Steel finish.	80.00
CB401-B	Emergency access switch, red. 2 Required	80.00
CB701	Emergency key switch, red	150.00

Electrified Lockset Application

CB402-A	Communicating bath switch, U 630 Stainless Steel finish.	80.00
CB402-B	Emergency access switch, red. 2 Required	80.00
CB702	Emergency key switch, red	150.00

Reference page 13 for system operation and component requirements



DESK SWITCH IN COMPACT BOX

Distributor Discount Code **DK** List



15-2



15-2-3

15-1	AA, SPDT push switch, 6 Amp @ 30VAC/DC	110.00
15-2	MO, SPDT push switch, 10 Amp @ 30VAC/DC	75.00
15-3	AA, SPDT toggle switch, 6 Amp @ 30VAC/DC	130.00
15-2-3	(1) MO push switch and (1) AA (on/off) toggle SPDT, 6 Amp @ 30VAC/DC	185.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

Price List Effective October 1, 2012



TIME DELAY RELAY

Distributor Discount Code **CK** **List**



Time Delay Relays

10TD	Time delay relay module with adjustable 1-60 second relock delay. Input: 12/24V AC/DC Voltage: 2 Amps @ 30 VDC (<i>resistive</i>)	Output: SPDT, dry contact Size: 2-1/4" x 1-1/2" x 3/4"	85.00
-------------	---	---	--------------



TIMERS

Distributor Discount Code **CK** **List**



14-2	7 day programmable timer with memory battery back-up capability Output: 1 SPDT, dry contact Voltage: 16 Amps @ 30 VAC/DC Specify 12V AC/DC or 24 AC/DC	240.00
-------------	---	---------------



PASSIVE INFRARED EGRESS CONTROL

Distributor Discount Code **V** **List**



MD-31DOW	Motion detector with time delay, white	235.00
MD-31DB	Motion detector with time delay, black	235.00



WALL MOUNT INDICATOR

Distributor Discount Code **CK** **List**



400U-L2



400NU-L2

Standard Finish 630 Stainless Steel

400U-L2	Two LEDs. Specify lens color. Standard Finish, on 1 gang plate	45.00
400NU-L2	Two LEDs. Specify lens color. Standard Finish, on narrow plate	45.00
400U-L3	Three LEDs. Specify lens color. Standard Finish	55.00
400U-LT1	One tricolor LED. Red, Green and Amber. Standard Finish	45.00
400U-LT2	Two tricolor LED. Red, Green and Amber. Standard Finish	55.00



DOOR POSITION SENSORS

Distributor Discount Code **V** **List**



DPS-11
DPS-11-2



MC-4



MC-4M

DPS-11	Adjustable ball type SPDT 5 Amp	45.00
DPS-11-2	Adjustable ball type 2 SPDT 5 Amp	65.00
MC-4	Recessed magnetic (3/4", SPDT, 30VDC, 50mA)	30.00
MC-4M	Recessed magnetic mounted on 1-1/4" x 4-7/8" plate	85.00
MC-7	Biased high security recessed magnetic (1", SPDT, 30VDC, 50mA)	65.00



LATCH AND DEADBOLT MONITORING STRIKE KITS

Distributor Discount Code **DK** **List**



MS-12



MS-14



MS-16



MS-20

see page 68 for ordering information



SECURITY DOOR CONTROLS

801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



F 10B Listed for 3hr Fire Rated Door

Features

- 5' Ft Cable
- UL10B Listed for 3 Hour Fire Rated Doors.
- 800,000 cycles. 8 times UL test criteria
- Wire Replacement Warranty

Power Transfer Hinge Application

Installed in the center hinge position of the door, PTH Power Transfer Hinges provide the concealed wires required to transfer power from the frame to electric hardware in the door for control and monitoring capability.



PTH x 5 Ft Cable

PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	200.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	195.00
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	250.00
FOR VON DUPRIN ELECTRIC LATCH RETRACTION EXIT DEVICES AND OTHER HIGH INRUSH DEVICES The PTH-2+4 hinges have been tested with Von Duprin* EL devices and Von Duprin power booster at Underwriters Laboratories.		
PTH-2+4Q	16 Amp Inrush , 6 conductor power transfer hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V 4.5" x 4.5" standard weight, 626 Dull Chrome	175.00
PTH-2+4QDPS	16 Amp Inrush , 6 conductor power transfer hinge, with door status contact 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V Concealed Door Position Contact, 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	225.00

Special Order Sizes and Heavy Weight Hinges

POA

SPECIFY FINISH

Dull Chrome finish is standard as specified by suffix Q.
To specify special finish, designate finish suffix below in lieu of Q.

C 605 Bright brass	H 613 Oil rubbed bronze	P 625 Bright Chrome	N/C
---------------------------	--------------------------------	----------------------------	------------

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





PTM HEAVY DUTY SERIES ELECTRIC POWER TRANSFER DEVICE

Distributor Discount Code **LZK LIST**



Miscellaneous Fire
Door Accessories
UL 10C 3 Hr Fire Rated
Classified per UBC 7-2



PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Aluminum Powder Coat, US28 equivalent	358.00
PTM-2BZ	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Dark Brown Powder Coat, US10B equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Aluminum Powder Coat, US28 equivalent	358.00
PTM-10BZ	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Dark Brown Powder Coat, US10B equivalent	358.00



CONCEALED POWER TRANSFER DEVICE



LIST



Miscellaneous Fire
Door Accessory




PT-5	UL Listed Concealed Power Transfer Device, for use with all high and low current applications	60.00
-------------	---	--------------

Also recommended for use with Von Duprin* EL 33 and 99 series and other high inrush devices
*Von Duprin is a registered trademark of Ingersol Rand and Von Duprin. Not intended as endorsement.



POWER TRANSFER LOOPS

Distributor Discount Code **V LIST**

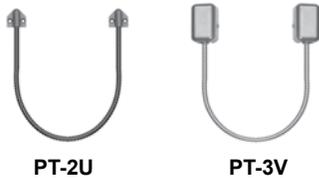

PT-2U	Armored flex conduit, less wires, 18" long, 1/4"	20.00
PT-3V	Armored flex conduit, less wires, with wire junction box	45.00



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



MINI CONSOLES

Distributor
Discount Code **WK**

LIST

Mini Consoles provide control for one or two doors. Momentary or maintained push button switches with Bi-Color LED indicators.

Dimensions: 4-1/8" W x 3-1/8" H x 6-1/4" L

Color: Beige

Contacts: 5 Amp @ 30VDC

Power: 24VDC @ 0.02 Amp required for each LED



DTMO-2

DTMO-1

DTMO-1	One momentary switch and one LED	200.00
DTMO-2	Two momentary switches and two LEDs	250.00
DTMOMA-2	One momentary, one maintained switch and two LEDs	300.00
DTMA-2	Two maintained switches and two LEDs	250.00



MODULAR CONTROL CONSOLES

Distributor
Discount Code **WK**

LIST



TCC AL8 AL4E



RCC AL8 AL8 AL4E

TCC	Slope front desk top console 12 stations maximum when using 2 control panels. Base unit, less panel. Color: black sides and beige top Dimensions: 10-1/4"W x 4-3/4"H x 9-5/8"D	300.00
RCC	Rack mount console. 24 stations maximum when using three control panels. (Maximum is 20 stations with "E" panel) Base unit, less panels. Color: Beige Dimensions: 19"W x 5-1/4"H x 6"D	650.00

Chassis less switches and light panels.

SPECIFY SWITCH AND INDICATOR PANELS

Add to List

Rocker Switch Rating: 3 Amp @ 30VDC

Power Required per LED: 24VDC @ 0.02 Amp

AL4	Four momentary switches with LEDs	500.00
BL4	Four maintained switches with LEDs	500.00
CL4	Four momentary/off/maintained switches with LEDs	500.00
DL4	Four momentary/off/momentary switches with LEDs	500.00
AL8	Eight momentary switches with LEDs	850.00
BL8	Eight maintained switches with LEDs	850.00
CL8	Eight momentary/off/maintained switches with LEDs	850.00
DL8	Eight momentary/off/momentary switches with LEDs	850.00
AL4E	Four momentary switches with LEDs, alarm, reset push button and key lock	600.00
BL4E	Four maintained switches with LEDs, alarm reset push button and key lock	600.00
CL4E	Four momentary/off/maintained switches with LEDs, alarm, reset push button and key lock	600.00
DL4E	Four momentary/off/momentary switches with LEDs, alarm, reset push button and key lock	600.00
EA	Panel with alarm, reset push button and key lock	120.00
F	Blank panel	28.00

CABINETS

Add to List

CAB7	Black cabinet for one RCC 7"H x 20-1/2"W x 14-1/2"D	575.00
CAB12	Black cabinet for two RCC 12-1/2"H x 20-1/2"W x 14-1/2"D	775.00

Price List Effective October 1, 2012

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com





SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012

COMMUNICATING BATHROOM EMLOCKS®

APPLICATION

Single hospital bathroom shared by two patient rooms.

SYSTEM OPERATION

Both doors must be closed to lock.

Activating CB401A (B) locks both doors.


Activating CB401A (B) again unlocks both doors.

When doors are locked, activating either CB401B (C) emergency release will unlock both doors.

Both doors will unlock automatically via signal from fire panel.

SYSTEM COMPONENTS

- (A) Fail Safe locks with door position switch.
Example: 1511-DPS
- (B) CB401A System activation push switch.
- (C) CB401B Emergency release push switch to be mounted above each door. CB701B key switch optional.
- (D) 631RFxUR1 Power Supply with Fire Panel Tie-In.

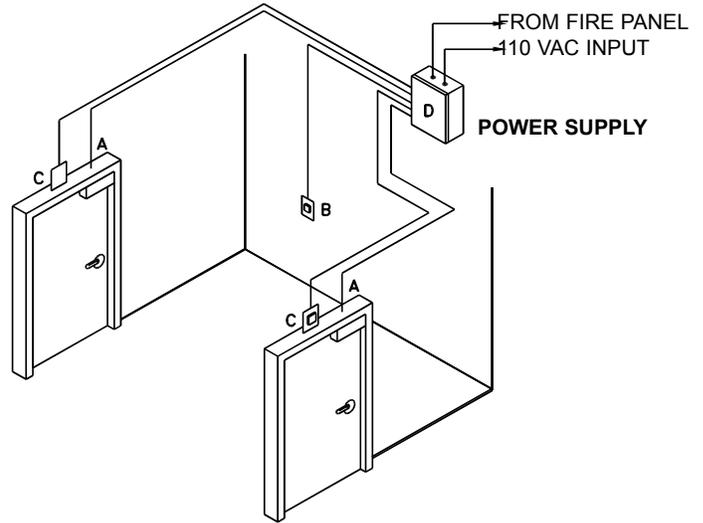

COMMUNICATING BATHROOM WITH HiTOWER® LOCKS

APPLICATION

Single hospital bathroom shared by two patient rooms.

SYSTEM OPERATION

Both doors must be closed to lock.

Activating CB402A (B) locks both doors.

When doors are locked, turning either inside door lever unlocks both doors.

When doors are locked, activating either CB402B (C) emergency release will unlock both doors.

Both doors will unlock automatically via signal from fire panel.

SYSTEM COMPONENTS



- (A) Fail Safe locks with door position switch or REX.
Examples: 7550-L, or 7850-RD
- (B) CB402A System activation push switch.
- (C) CB402B Emergency release push switch to be mounted above each door. CB702B key switch optional.
- (D) 631RFxUR1 Power Supply with Fire Panel Tie-In.



CB401-A
CB402-A



CB401-B
CB402-B

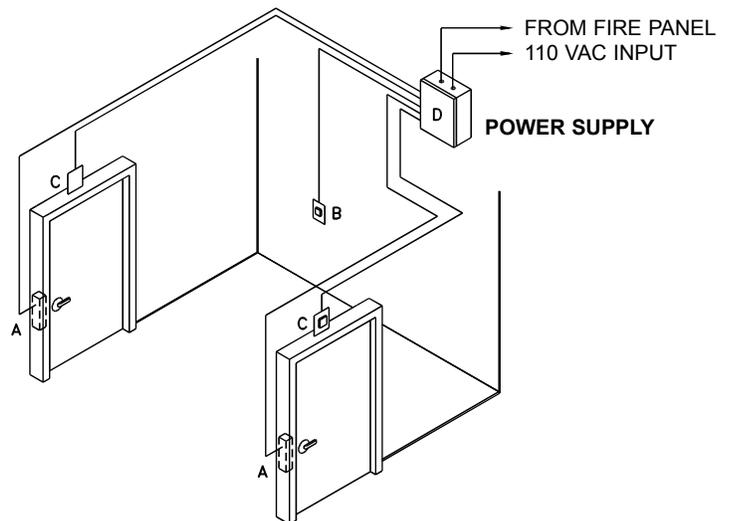

UR1

2 DOOR INTERLOCK "A"

3 and 4 Door Interlock Available

APPLICATIONS

Darkrooms, laboratories, clean rooms, x-ray or other treatment rooms, light and air trap rooms and more.

OPERATION

All doors remain closed and unlocked. Opening either door causes the second door to lock until the opened door returns to the closed position. A key switch is provided for system activation and deactivation.

SYSTEM COMPONENTS SHOWN



- (A) 631RFA-UR2-4 Power Supply
- (B) 1511-DPS EmLock
- (C) 701 System On-Off Key Switch

ALTERNATE "B" COMPONENTS

Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1581-DPS	★ 55-A-LBM	7530-L	FS23M-D
1565-DPS	★ 55-B-LBM	7830-DS	1190A-D
1511-DPS-TJ	★ 55-C-LBM	★ 7560-L	1091A-D

★ Indicates Fail Secure

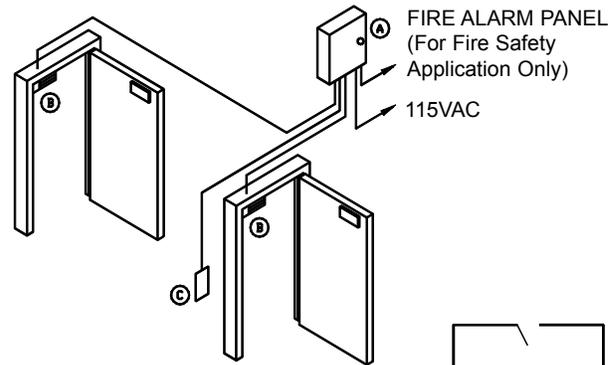

NOTES: Consult factory for 3 and 4 door interlocks. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory.

2 DOOR MANTRAP "B"

3 and 4 Door Mantrap Available

APPLICATIONS

Laboratories, clean rooms, money counting rooms, restricted dark rooms, computer rooms and more.

OPERATION

Both doors are normally closed and locked. Unlocking either door causes the other to be incapable of being unlocked. A key switch (D) is provided for system activation and deactivation. Doors are accessed by Digital Keypad (C).

SYSTEM COMPONENTS SHOWN



- (A) 631RFA-UR2-4
- (B) 1511-DPS-BAS or 1511-BAS
- (C) 918 Digital Entry Momentary Access
- (D) 701 Key Switch ON-OFF

ALTERNATE "B" COMPONENTS/LOCKING DEVICE

Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1565-DPS-BA	★ 55-A-LCM-LBM	7530-S	FS23M-BD
1511-DPS-BAS-TJI	★ 55-B-LCM-LBM	★ 7560-S	1190A-BD
		7830-DS	

★ Indicates Fail Secure

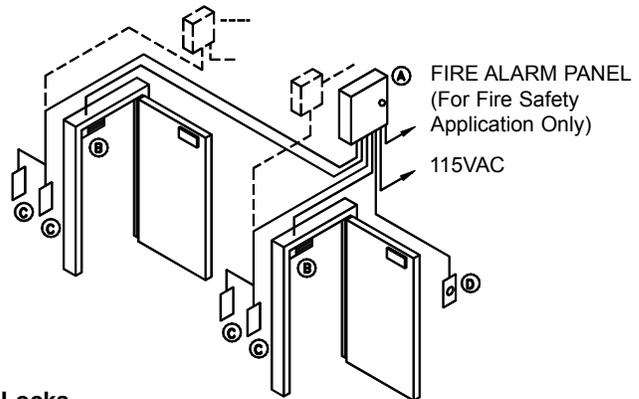

ALTERNATE "C" COMPONENTS/ACCESS CONTROL - Refer to literature for switch specifications.

Key Switch	Desk Switch	Keypad	Card & Keypad Reader
702	15-2	918	E4KP
702N		920	E5P
802			
802N			

ALTERNATE "D" COMPONENTS/ON-OFF SWITCH - Refer to literature for switch specifications.

Desk Switch	Push Switch
15-1 ON-OFF	425 ON-OFF

NOTES: Consult factory for 3 and 4 door mantraps. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory. Consult factory for Control and Monitoring Panel applications.

APPLICATIONS

Laboratories, clean rooms, money counting rooms, restricted dark rooms, computer rooms and more.

OPERATION

Door 1 is locked, Door 2 remains unlocked. When Door 1 is unlocked, Door 2 locks. When Door 2 is opened, Door 1 cannot be unlocked. A key switch (D) is provided for system activation and deactivation. Door 1 is accessed by Digital Keypad.

SYSTEM COMPONENTS SHOWN

- (A) 631RFA-UR2-4 Power Supply
- (B) 1511-DPS-BAS EmLock
- (C) 918 Digital Entry Momentary Access
- (D) 701 Key Switch ON-OFF

ALTERNATE "B" COMPONENTS/LOCKING DEVICE



Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1565-DPS-BA	◆ 55-A-LCM-LBM	7530-S	FS23M-BD
1511-DPS-BAS-TJI	◆ 55-B-LCM-LBM	7830-DS	1190A-BD
		◆ 7560-S	

◆ Indicates Fail Secure

ALTERNATE "C" COMPONENTS/ACCESS CONTROL - Refer to literature for switch specifications.

Key Switch	Desk Switch	Keypad	Card & Keypad Reader
702	15-2	918	E4KP
702N		920	E5P
802			
802N			

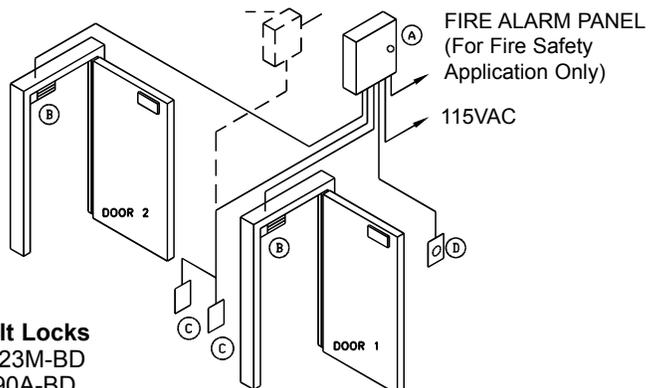

ALTERNATE "D" COMPONENTS/ON-OFF SWITCH - Refer to literature for switch specifications.

Desk Switch	Push Switch
15-1 ON-OFF	425 ON-OFF

NOTES: Consult factory for 3 and 4 door interlocks. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory. Consult factory for Control and Monitoring Panel applications.

ELEVATOR LOBBY DOOR SYSTEM


OPERATION

Many high-rise building tenants that occupy a complete floor may have a problem when it comes to securing their elevator lobby doors. These doors lead through office space to the emergency exit stairwell doors. People must have free access to the stairwell at all times. This leaves some companies vulnerable to transient traffic, theft and loss of proprietary information. SDC manufactures a lobby door security system which meets both fire life safety and security needs.

The elevator lobby doors are normally closed and locked by SDC Model Z7850 HiTower Fail-Safe lockset. The intercom system provides two-way communication to the security desk. When a call is placed from the elevator lobby, the security desk personnel can momentarily release the SDC Z7850 lockset by using the SDC Desk Console (Model DTMO-1). If there is no response from the security desk personnel, the person in the elevator lobby can depress the red exit palm push button switch (SDC Model 432KUR). When the red exit switch is activated, the SDC Model Z7850 HiTower lock will immediately release and an alarm will sound in the elevator lobby and the security desk console.

An authorized person can reset the HiTower lockset, turn off the alarm and return the system to the normal secured operation by using the built-in Key Reset on the red exit palm push button switch. Personnel may always obtain access to the offices by use of an access control system. Egress from the office to the lobby is accomplished by rotating the inside lever.

A SDC Series 600 Power Supply will provide 24VDC power to the HiTower locks, Security Desk Console and alarm. The emergency control relay within the power supply will turn off the system power when activated by a building fire alarm device. The SDC Model Z7850 lockset will release immediately when power is removed.

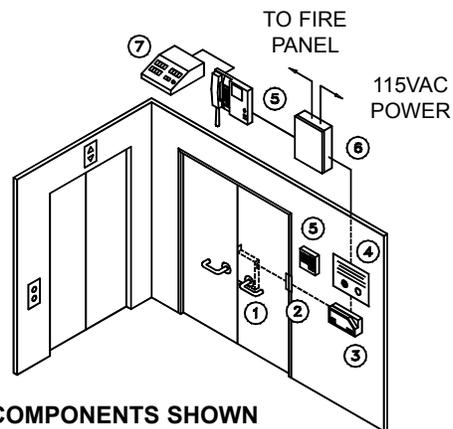

SYSTEM COMPONENTS SHOWN

- (1) SDC-Z 7850 HiTower Lock
- (2) SDC-PTH-4 Power Transfer Hinge
- (3) E4KP Stand Alone Proximity Reader
- (4) SDC-APB 1000 Sign with Release Push Switch and Alarm
- (5) Intercom/CCTV by others
- (6) SDC-631RF Power Supply
- (7) SDC-DT, RCC or TCC Door Control Console and Annunciator

NOTE: All system field wiring is to be installed in accordance with all local building codes and the approval of the local authority having jurisdiction. All wiring is to be done by a licensed Access Control or Fire and Life Safety specialist.



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012

Item Code	Page	Item Code	Page	Item Code	Page	Item Code	Page
Angle Brackets	50	PB-8	63	1511-DF	48	433	72
ACM-1	63	PD2090A	42	1511S	54	434	72
AL4	81	PSB560	67	1511T	54	435	72
AL8	81	PT-2U	80	1512	46	441	72
APB1000A	76	PT-3V	80	1513	46	442	72
AR11Y	49	PT-5	80	15-2	76	443	72
BL4	81	PTH	79	15-3	76	444	72
BL8	81	PTM	80	15-4 F/S	35	446	72
BPS6S	75	RB12V4	63	1561	51	451	72
BPG6S	75	RB12V7	63	1561S	52	452	72
BR64	64	RCC	81	1561TJ	52	453P	72
CB401-AU	76	S6303FH	29	1562	51	45-4	36
CB401-B	76	SC-10	29	1562SC	52	45-6	36
CB701	76	TB2450	64	1562SCHDB	52	45-7	36
CC1-5	16	TB2475	64	1565	51	45A	36
CC3-5	16	TCC	81	1566	51	463	72
CL4	81	TJ1	47	1571	46	474	72
CL8	81	TJ2	47	1571DE	56	491	76
CR4	63	TJ2440	64	1572	46	492	76
CYL	16	TJ81	47	1573	46	55 A thru F	37
DBM	37	TJ82	47	1575DEU	56	55-ABC	38
DC-1	49	TP1220	64	1575U	43	510-590	68
DL4	81	TP2440	64	1576AB	43	602RF	62
DL8	81	TR-12	64	1576-BK	43	621P	61
DPS-11	77	TR-24	64	1576DEU	56	631RF	62
DTMA	81	UB11	49	1576-MP	43	632RF	62
DTMO	81	UB12	49	1576U	43	634RF	62
E1200	45	UF11	49	1576-ZB	43	636RF	62
E300	41	UF12	49	1581	46	7000-DGK	21
E600	45	UF81	49	1581DE	56	701	69
E6200	45	UF82	49	1581-DF	56	702	69
E75	11	UR-1	63	1581S	55	702R	57
E76	12	UR2-4	63	1582	46	704	69
E77	12	UR4-8	63	1583V	41	705	69
EA100	58	Z7250	15	1591U	42	706	69
EH	59	Z7550	19	180A	40	707	69
EKE03	23	ZA7850	16	2090A	39	708	69
EMC	63	ZD7250	14	210	39	708R	57
EZ-A	48	ZR7550	19	2490A	39	709	69
EZ-B	48	ZS7250	14	25-4U	35	710	69
EZ-D	48	ZT7550	19	260	39	711	69
EZ-T	48	ZT7850	16	280	40	712	69
FB-4	63	ZY7550	19	290	41	713	69
Filler Plates	50	101-1A	57	290LS	41	7500EB	19
FS23M	39	101-1AK	57	295	41	801AL	69
GKE03	23	101-4AM	57	30-4	38	802AL	69
GL160A	42	101-DE	56	350V	44	804AL	69
GL260A	42	101-KDE	56	352V	44	805AL	69
LR100	31	101-PAM	57	400U-L2	77	806AL	69
MC-4	77	1091A	39	400U-RMB	76	807AL	69
MC-7	77	10TD	77	400U-SN	76	808AL	69
MD-31	71	110	39	412	71	809AL	69
MS-12	68	1190A	39	413	71	810AL	69
MS-14	68	1291A	39	422	71	811AL	69
MS-16	68	12VR	62	423	71	812AL	69
MS-18	68	14-2	77	424	71	813AL	69
MS-20	68	1490A	39	425	71	918	9
MSB550	67	15-1	76	431	72	920	9
PB-16	63	1511	46	432	72	921	10
		1511DE	56			923	10
						924	10

Price List 17

ELECTRIC & MECHANICAL ACCESS CONTROL HARDWARE

INNOVATION

SDC has been awarded scores of patents for:

- Electrified Cylindrical Locksets
- Electrified Mortise Locksets
- Actuator Controlled Locksets
- Electromagnetic Locks
- Magnetic Shear Locks
- Delayed Egress Locks
- Request-to-Exit Bars

LEADERSHIP

SDC has earned twelve SIA New Product Achievement and Security Industry Finest Awards since 1997. In addition, SDC has received numerous SIA New Product Showcase certificates of recognition for Commitment to Innovation and Excellence in New Product Development.



PROJECTS

- NASA Kennedy Space Center, FL
- King Khalid International Airport, Saudi Arabia
- J. Paul Getty Museum, Los Angeles
- Chek Lap Kok Airport, Hong Kong
- Bank of America, U.S.A.
- Kuala Lumpur International Airport, Malaysia
- Smithsonian Institute, Washington D.C.
- California State Capital, East End Project
- Duke Energy Nuclear Plants, N. & S. Carolina
- Dallas/Forth Worth International Airport, Texas
- Museum of Modern Art, New York
- Exxon, U.S.A.
- Chase Manhattan Bank, U.S.A
- JFK International Airport; NY

QUALITY

SDC practices quality management based on continued improvement of daily operations, product quality and customer satisfaction.



Please check on-line version of price list regularly. We strive to expand our product line and offering you more options and updates on regular basis.

COMPREHENSIVE CD-ROM CATALOG

The SDC Comprehensive CD-ROM catalog includes all product datasheets, installation instructions and list prices. Go to the SDC website or send us an e-mail to request your Comprehensive CD-ROM Catalog today.




shipQUICK

Over 100 SDC products are available for shipment the same day or next business day from the SDC warehouse nearest you. Visit us at www.SDCsecurity.com and download your copy of the shipQUICK inventory so you know first hand which products SDC can expedite for you.



SDC SYSTEM LIBRARY

SDC has provided a library of the more commonly used systems. These and more basic systems are available for all visitors. Product specific system designs are compatible with the Project Folders. A system riser diagram and point-to-point drawing, including written method of operation, and all documentation related to all components may be automatically downloaded to your Project Folder.

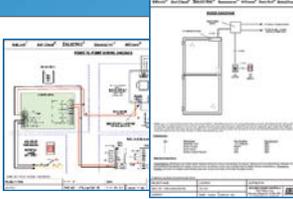

Download complimentary Pre-Built systems at SDCsecurity.com/diagrams



Available on the **App Store**
It's on **ANDROID**

SDC APP Free! Available for iPad, iPhone & Android
SDCSecurity.com/FreeApp



www.sdcsecurity.com service@sdsecurity.com
Tel: (805) 494 0622 (800) 413 8783
Fax: (805) 494 8680 (800) 959 4732

801 Avenida Acaso, Camarillo, CA 93012
P.O. Box 3670, Camarillo, CA 93011-3670

© Copyright 2012, Security Door Controls