




Brush Sealing Solutions
for over 30 years

CATALOG

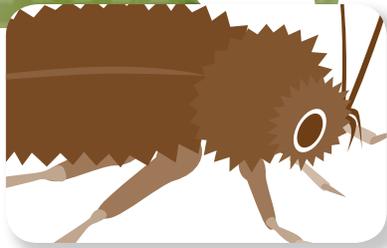

Pest Exclusion Brush Products

Reduce the use of pesticides and chemical pest control with Sealeze pest exclusion brush products.

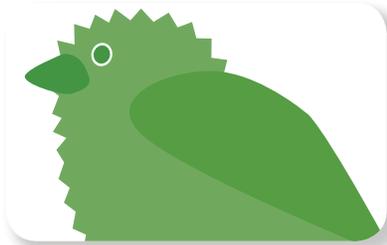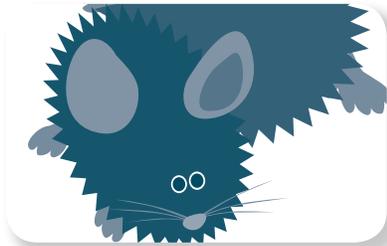

Providing Brush Sealing Solutions for over 30 years.

www.sealeze.com | weatherseal@sealeze.com | 800-446-7325

Table of Contents

Entrance Doors

Door Sweeps 3
Astragal Seals..... 4
AstraSweeps..... 4

Overhead Doors and Dock Levelers

Commercial Sectional Door Seals..... 5
Adjustable Door Bottom 5
Garage Door Thresholds 5
Rolling Steel and Large Sectional Doors (gaps to 3 ") 6
Dock Leveler Seals 7

How To Order

Phone, fax or email your order.

CALL TOLL FREE: 1-800-446-7325 • FAX TOLL FREE: 1-800-448-2908 • weatherseal@sealeze.com

Give your Sales Representative the following information for each part number being ordered:

1. Part number including brush length.
2. Whether or not slots and screws are required.
3. The length of the part in feet and inches.
4. Number of pieces.

Note: Therm-L-Brush® is shipped with slots and self-drilling TEK screws with Phillips/hex drive slots. UL Labels are applied upon request.


Therm-L-Brush is made from 100% type-6 black nylon, or polypropylene (ProSeal). Our extrusions are aluminum and stocked in the following finishes: CLA (clear satin anodized), DUR (duranodic), and GLD (polished brass anodized).

Order YOUR way to promote easy installations:

- **Stocked Length:** Therm-L-Brush® and all Sealeze products are available directly from stock for immediate shipment in stocked lengths. Current stock lengths are 3, 7, 8 and 10 feet.
- **Custom Cut-To-Length:** We will custom cut our weatherseals to the lengths you need—usually at no additional charge. Call your Sales Representative with your requirements.
- **Stocked Kits:** Therm-L-Brush for entrance doors and residential garage doors is stocked in kit form in selected part numbers. Kits are poly-bagged and include the following:
 - **pre-cut weatherseals**
 - **slotted holder flanges for adjustable installation**
 - **self-drilling screws for fast installation**
 - **instructions**

Call your Sales Representative for availability.

- **Custom Kits:** If you need custom door kits for non-standard size doors, call your Sales Representative with your requirements. We'll work with you!
- **Shipping:** Small orders of lengths 8 feet and under are shipped UPS unless specified otherwise. Orders with lengths over 8 feet must go by truck. To save minimum freight charges on small orders, consider having lengths longer than 8 feet cut in half or some other combination in order to save on freight costs by shipping UPS.

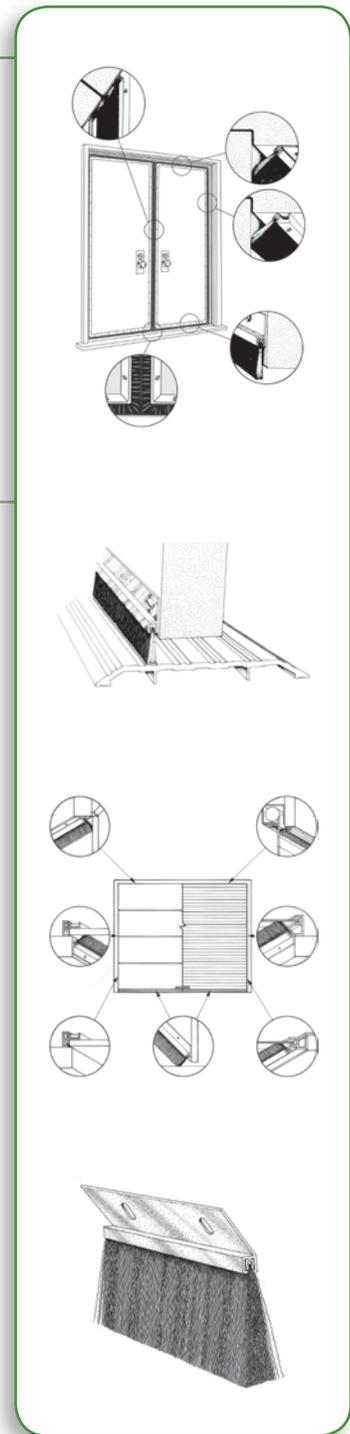

Entrance Door Exclusion Products

Keep pests out. Save on energy costs, too!

All Sealeze Kits have pre-slotted holders, screws for easy installation and installation instructions.



UL LISTED
Sealeze nylon
Therm-L-Brush® up
to 4 inches long
are UL labeled
for use on 3-hour
fire doors.

How to Select the Right Kit

Gap to Seal

Up to 3/8 inch
Up to 1/2 inch
Up to 9/16 inch
Up to 1 inch

Select These Kits


Product Code Start with "A"
Product Code Start with "B"
Product Code Start with "C"
Product Code Start with "D"

Color

Clear Satin (silver)
Duranodic (bronze)
Polished Brass (gold)


Select These Kits

Product Codes with "CLA" in middle
Product Codes with "DUR" in middle
Product Codes with "GLD" in middle

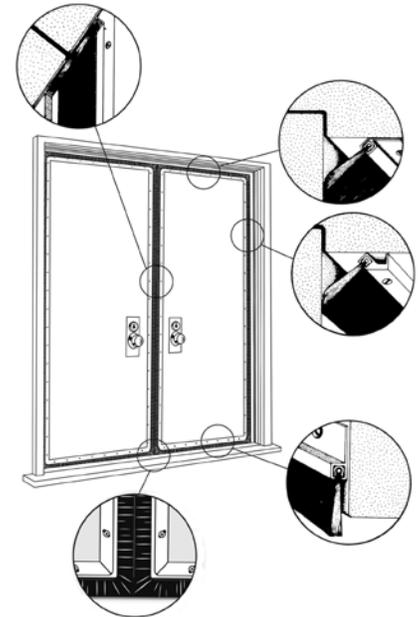


Door Sweep Kits

Seal the irregular surfaces of thresholds at door bottoms.

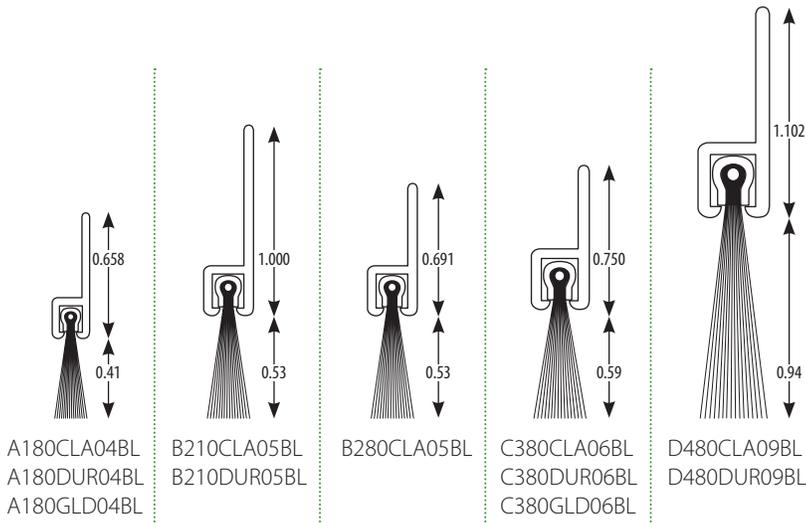

Prevent rodents, insects and reptiles from entering between the door bottom and threshold. Sealeze door bottom seals provide an effective seal even on uneven surfaces.

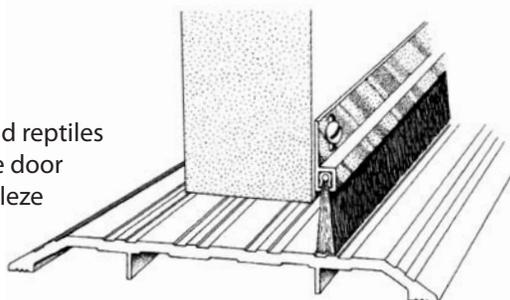

Kit Product Code	Brush Length	Door Bottom Width
A180CLA04BL3	0.41"	3'
A180CLA04BL3.5	0.41"	3.5'
A180CLA04BL4	0.41"	4'
A180DUR04BL3	0.41"	3'
A180DUR04BL3.5	0.41"	3.5'
A180DUR04BL4	0.41"	4'
A180GLD04BL3	0.41"	3'
A180GLD04BL3.5	0.41"	3.5'
A180GLD04BL4	0.41"	4'
B210CLA05BL3	0.53"	3'
B210CLA05BL3.5	0.53"	3.5'
B210CLA05BL4	0.53"	4'
B210DUR05BL3	0.53"	3'
B210DUR05BL3.5	0.53"	3.5'
B210DUR05BL4	0.53"	4'
C380CLA06BL3	0.59"	3'
C380CLA06BL3.5	0.59"	3.5'
C380CLA06BL4	0.59"	4'
C380DUR06BL3	0.59"	3'
C380DUR06BL3.5	0.59"	3.5'
C380DUR06BL4	0.59"	4'
C380GLD06BL3	0.59"	3'
C380GLD06BL3.5	0.59"	3.5'
C380GLD06BL4	0.59"	4'
D480CLA09BL3	0.94"	3'
D480CLA09BL3.5	0.94"	3.5'
D480CLA09BL4	0.94"	4'
D480DUR09BL3	0.94"	3'
D480DUR09BL3.5	0.94"	3.5'
D480DUR09BL4	0.94"	4'



For immediate Answers and Free Samples call **1.800.446.7325**
or Fax **1.800.448.2908** or visit www.sealeze.com




Astragal Seal Kits

Ideal for sealing gaps between metal or wooden double doors.

Kit Product Code	Door Length	Height	Kit Product Code	Brush Length	Door Height
A180CLA0.4BL14	0.41"	7'	A180CLA0.4BL16	0.41"	8'
A180DUR04BL14	0.41"	7'	A180DUR04BL16	0.41"	8'
A180GLD04BL14	0.41"	7'	A180GLD04BL16	0.41"	8'
C380CLA06BL14	0.59"	7'	C380CLA06BL16	0.59"	8'
C380DUR06BL14	0.59"	7'	C380DUR06BL16	0.59"	8'
C380GLD06BL14	0.59"	7'	C380GLD06BL16	0.59"	8'


Top View

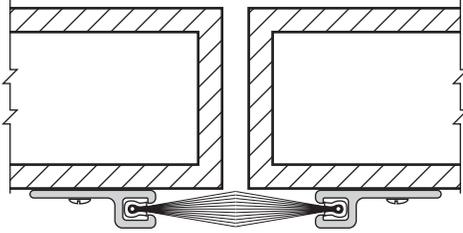

Even a hole as thin as a dime can be an "open door" for many insects and pests. Close the gap between double doors with Sealeze pest exclusion astragal seals.

AstraSweep™ Kits: For a Complete Seal

Includes sweeps, astragal seals and AstraSweep corner seals for a complete seal around double doors.

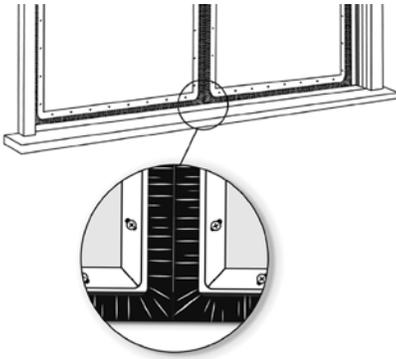

The hole between the door sweep and the astragal seal can be an invitation to pests. Close the hole with Sealeze AstraSweeps.

Kit Product Code	Door Size (W x H)	Finish Color	Kit Product Code	Door Size (W x H)	Finish Color
C380CLA06BL67	6' x 7'	Clear Anodized	C380CLA06BL78	7' x 8'	Clear Anodized
C380DUR06BL67	6' x 7'	Duranodic	C380DUR06BL78	7' x 8'	Duranodic
C380CLA06BL68	6' x 8'	Clear Anodized	C380CLA06BL87	8' x 7'	Clear Anodized
C380DUR06BL68	6' x 8'	Duranodic	C380DUR06BL87	8' x 7'	Duranodic
C380CLA06BL77	7' x 7'	Clear Anodized	C380CLA06BL88	8' x 8'	Clear Anodized
C380DUR06BL77	7' x 7'	Duranodic	C380DUR06BL88	8' x 8'	Duranodic

Overhead Door Pest Exclusion Products

Rolling Steel, Sectional, Commercial and Residential


A variety of holders and brush length provides a range of door configurations. Seal gaps up to 7 inches.



UL LISTED
Sealeze nylon
Therm-L-Brush up
to 4 inches long
are UL labeled
for use on 3-hour
fire doors.


Use angled holder on jambs.
Brush fills all corrugations
for complete seal.

Angled holder can be mounted on inside
so brush seals against edge of door.
Inside mount hides seal and prevents
potential impact damage. Use double
backed tape for easiest installation.

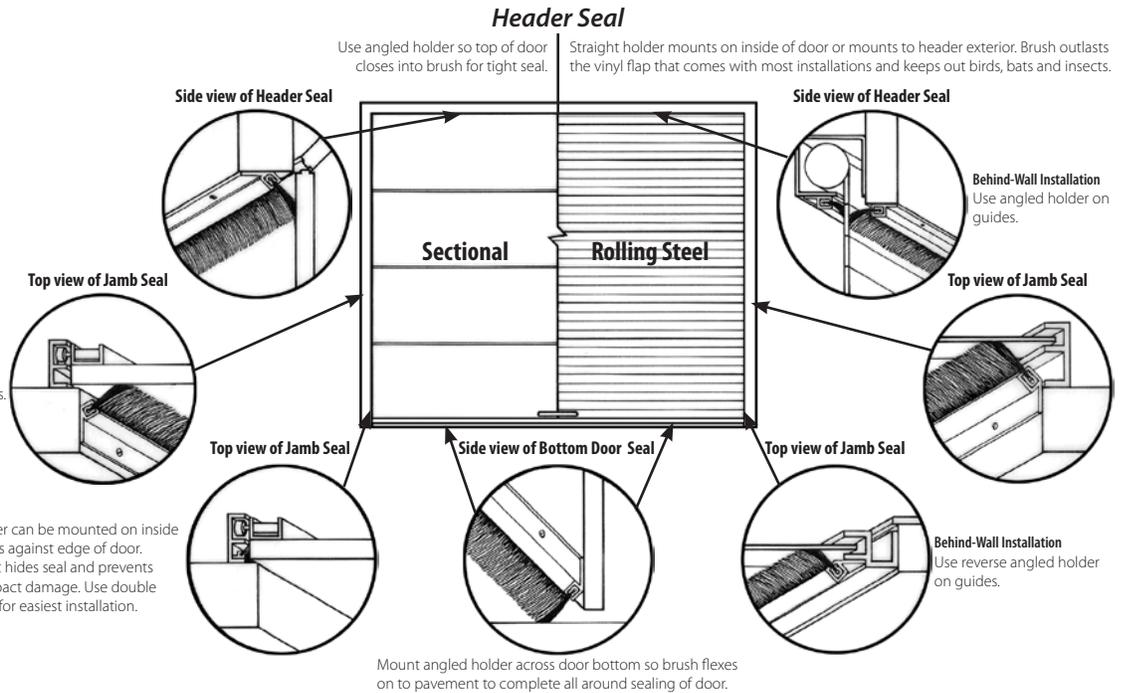

Commercial and Residential Sectional Doors


JR40 and J140 are for 9' x 7' and 16' x 7' garage doors.

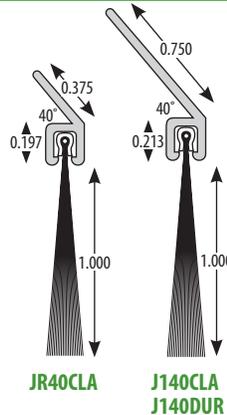

Product Code	Brush Length	Holder Length	Holder Angle
JR40CLA08BL	0.75"	0.375"	40°
JR40CLA10BL	1.00"	0.375"	40°
J140CLA10BL	1.00"	0.750"	40°
J140DUR10BL	1.00"	0.750"	40°

Adjustable Door Bottom Seals


Slotted aluminum holder is easy to install and won't rust. Flexible black rubber provides a perfect seal for commercial and residential doors.

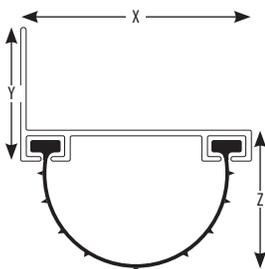

Product Code	X	Y	T
ABD40BLK	1.750"	1.00"	1.50"
ABD25BLK	1.375"	0.75"	1.00"

Garage Door Thresholds

Durable, solid vinyl garage threshold is easy to install and it protects bottom of the door from moisture and provides a tight seal.

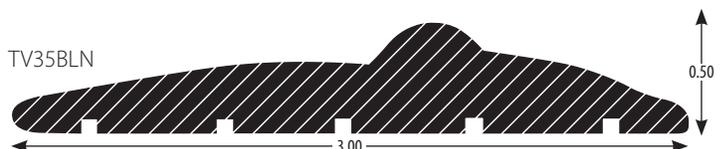

For immediate Answers and Free Samples call **1.800.446.7325**
or Fax **1.800.448.2908** or visit **www.sealeze.com**




Rolling Steel, Sectional and Larger Doors

Seal gaps from 1 to 3 inches

Keep out bats, birds, insects and rodents . . . and save on energy costs, too! Our wide variety of holder lengths, holder angles and brush lengths provides for maximum flexibility, easy installation and the best seal possible. Choose D, F or G to suit application.

Product Code	Brush Length	Holder Length	Holder Angle
D480CLA09BL	0.94"	1.102"	180°
D480DUR09BL	0.94"	1.102"	180°
D480CLA12BL	1.19"	1.102"	180°
D480DUR12BL	1.19"	1.102"	180°
D480CLA16BL	1.61"	1.102"	180°
D480DUR16BL	1.61"	1.102"	180°
D480CLA20BL	2.00"	1.102"	180°
D480DUR20BL	2.00"	1.102"	180°
D480CLA30BL	3.00"	1.102"	180°
D480DUR30BL	3.00"	1.102"	180°
D482CLA09BL	0.94"	1.891"	180°
D482CLA12BL	1.19"	1.891"	180°
D482CLA16BL	1.61"	1.891"	180°
D482CLA20BL	2.00"	1.891"	180°
D482CLA30BL	3.00"	1.891"	180°
D483CLA09BL	0.94"	3.391"	180°
D483CLA12BL	1.19"	3.391"	180°
D483CLA16BL	1.61"	3.391"	180°
D483CLA20BL	2.00"	3.391"	180°
D483CLA30BL	3.00"	3.391"	180°
D445CLA09BL	0.94"	0.844"	45°
D445CLA12BL	1.19"	0.844"	45°
D445CLA16BL	1.61"	0.844"	45°
D445CLA20BL	2.00"	0.844"	45°
D445CLA30BL	3.00"	0.844"	45°
D45XCLA09BL	0.94"	1.890"	45°
D45XCLA12BL	1.19"	1.890"	45°
D45XCLA16BL	1.61"	1.890"	45°
D45XCLA20BL	2.00"	1.890"	45°
D45XCLA30BL	3.00"	1.890"	45°
D45RCLA09BL	0.94"	1.000"	45° REV
D45RCLA12BL	1.19"	1.000"	45° REV
D45RCLA16BL	1.61"	1.000"	45° REV
D45RCLA20BL	2.00"	1.000"	45° REV
D45RCLA30BL	3.00"	1.000"	45° REV

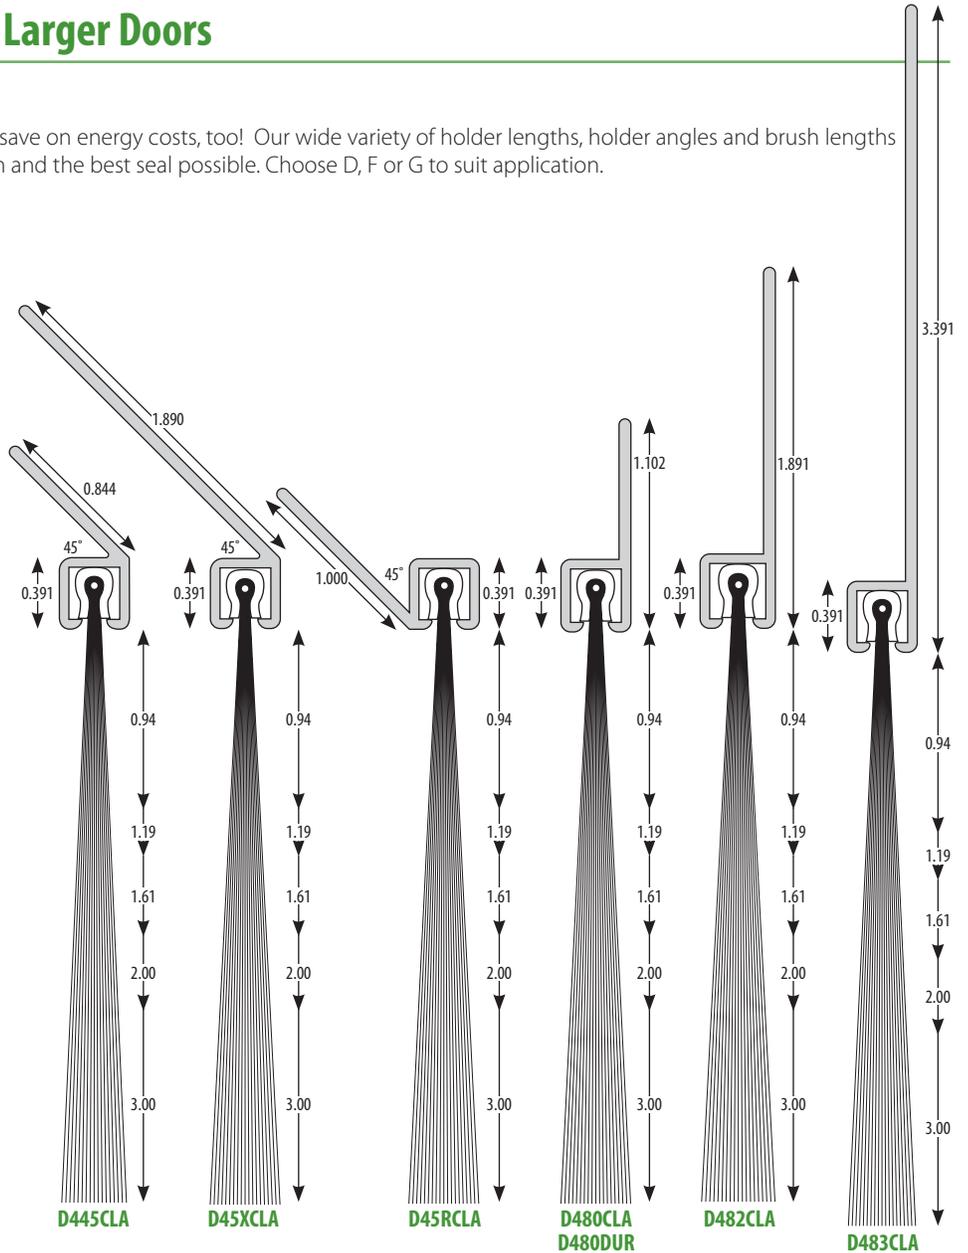

Sealeze "F" series brush provides a cost-effective solution in many applications where the heavy density of our "G" series brush isn't needed. Available in lengths up to 5 inches, F-series brushes can be used to seal gaps in many large door applications. (Not pictured.)

Sealeze provides "G" series brush for larger gaps up to 7 inches. Please contact your Sealeze Representative for more information.





Product Code	Brush Length	Holder Length	Holder Angle
F580CLA15BL	1.50"	1.00"	180°
F580CLA20BL	2.00"	1.00"	180°
F580CLA25BL	2.50"	1.00"	180°
F580CLA30BL	3.00"	1.00"	180°
F580CLA40BL	4.00"	1.00"	180°
F580CLA50BL	5.00"	1.00"	180°
F582CLA15BL	1.50"	1.50"	180°
F582CLA20BL	2.00"	1.50"	180°
F582CLA25BL	2.50"	1.50"	180°
F582CLA30BL	3.00"	1.50"	180°
F582CLA40BL	4.00"	1.50"	180°
F545CLA15BL	1.50"	1.50"	45°
F545CLA20BL	2.00"	1.50"	45°
F545CLA25BL	2.50"	1.50"	45°
F545CLA30BL	3.00"	1.50"	45°
F545CLA40BL	4.00"	1.50"	45°
F545CLA50BL	5.00"	1.50"	45°

Dock Leveler Seals

90° flanges form a perfect fit for dock leveler seals . . . "A" series brush is ideal for small gaps, while "G" series will close even the largest gaps.





Loading dock areas are open invitations for pests to enter. Pest exclusion seals around dock levelers are particularly effective keeping rodents out.

Product Code	Brush Length	Holder Length	Holder Angle
A190CLA04BL	0.41"	0.55"	90°
A190CLA10BL	1.00"	0.55"	90°
B290CLA05BL	0.53"	0.69"	90°
B290CLA10BL	1.00"	0.69"	90°
C390CLA06BL	0.59"	0.96"	90°
C390CLA10BL	1.00"	0.96"	90°
D490CLA09BL	0.94"	1.06"	90°
D490CLA12BL	1.19"	1.06"	90°
D490CLA16BL	1.61"	1.06"	90°
D490CLA20BL	2.00"	1.06"	90°
D490CLA30BL	3.00"	1.06"	90°
G690CLA18BL	1.75"	1.38"	90°
G690CLA25BL	2.53"	1.38"	90°
G690CLA30BL	3.00"	1.38"	90°
G690CLA40BL	4.00"	1.38"	90°

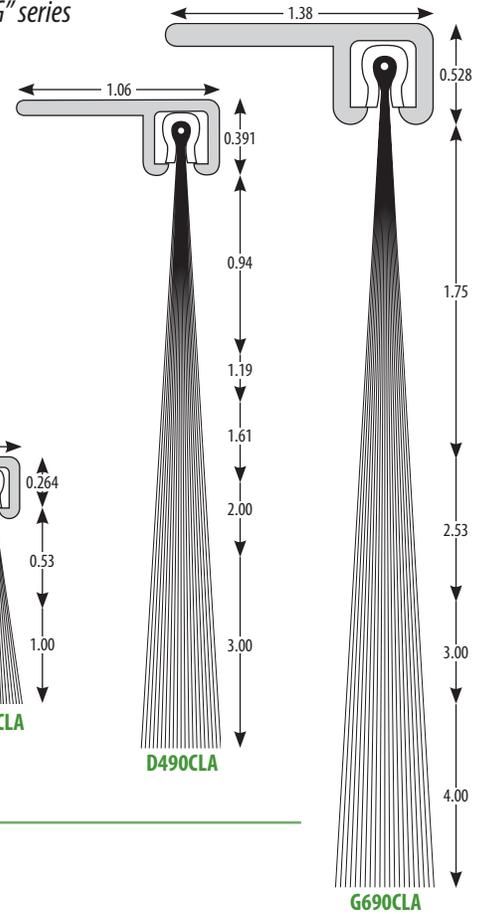

Weldable Dock Leveler Seals

Includes a steel holder that can be welded to the sides of the leveler.

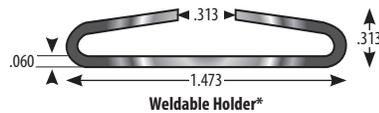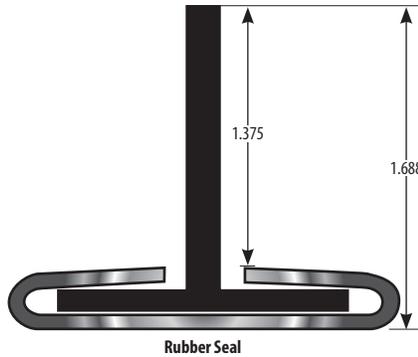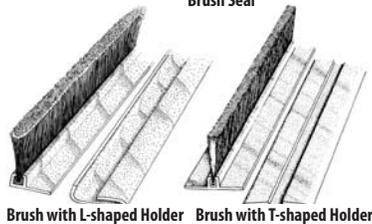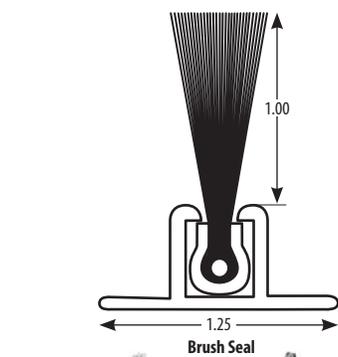

Product Code	Seal Shape	Exposed Seal Length	Seal Type
BT90CLA10BLKIT8	T	1.0"	Brush
BT90CLA14BLKIT8	T	1.4"	Brush
BT90CS15PVCKIT8	T	1.4"	Rubber
BDL90CS05BLKIT8	L	0.5"	Brush
BDL90CS10BLKIT8	L	1.0"	Brush
BDL90CS14BLKIT8	L	1.4"	Brush
DDL90CS09BLKIT8	L	1.0"	Brush
DDL90CS12BLKIT8	L	1.2"	Brush
DDL90CS16BLKIT8	L	1.6"	Brush
DDL90CS20BLKIT8	L	2.0"	Brush
DDL90CS30BLKIT8	L	3.0"	Brush

*Kit includes two 96" sections.

Hinge Seals

For the rear hinge of the dock leveler. Choose from a 1" diameter neoprene "rope" seal or a 2" x 3" foam stock. Call for details.

Product Code	Description	Dimensions
HINGE-SEAL	Foam Seal	2" x 3" x 7'
HINGE-SEAL-ROD	Hinge Seal Stabilizer	3/8" x 7'
RS1ONEOPR	Rope Seal	Cut-To-Order




For immediate Answers and Free Samples call **1.800.446.7325**
or Fax **1.800.448.2908** or visit **www.sealeze.com**





Contact your Sealeze Sales Representative



green
sustainable
solutions

Integrated Pest Management programs include pest exclusion as a way to reduce the use of pesticides and chemicals.

Sealeze Brush Pest Barrier

A Physical Barrier

Sealeze pest barrier Therm-L-Brush is a dense wall with thousands of nylon filaments bound securely by a strip of galvanized steel and held in an extra-thick aluminum holder. Our pest barrier brush is extra dense to deter even the most persistent pests.

Blocks Light and Odors

Not only does pest barrier brush deter entry, it blocks the light and odors that attract pests in the first place.

A More Effective Seal

Unlike vinyl and other seals, pest barrier Therm-L-Brush won't crack, stays flexible in cold weather and is so flexible it conforms to uneven surfaces to provide a better seal than vinyl, silicone or other sealing products. And, it works on OLD and NEW doors!

More Economical

Durable

Independent tests show Sealeze Therm-L-Brush is so durable it stands up to over 2 million door operations without degradation. Installations of 10 to 15 years are not uncommon. It is so durable, it may never need replacing.

Easy to Install

No training or special tools are required.

Saves Energy

In addition to providing an effective pest barrier, Sealeze Therm-L-Brush provides an efficient weatherseal that can pay for itself in energy savings alone—often in less than 1 year!

Attractive

Sealeze pest barrier Therm-L-Brush comes in a variety of holder and brush color combinations to complement any entryway or door opening.

Installation Instructions

Therm-L-Brush® installs in 5 easy steps to help reduce labor costs:

1. Measure the door (bottom, jambs and header).
2. Cut the brush and holder to length.
3. Pry open the ends of the holder with a screwdriver.
4. Insert the brush into the holder and peen both ends of the holder with a hammer to lock the brush in place.
5. Mount the seal by holding the aluminum flange to the jambs or door bottom while aligning brush to the proper fit. Then secure with self-drilling screws provided. Slotted holes allow for easy final adjustment for the perfect fit.

Tips:

Cut Brush with diagonal cutting pliers, shears or bolt cutters. Cutting action must pinch ends closed to seal in filaments.

Cut Holder with hack saw, power saw (with metal cutting blade), or angle iron shear.

Mount Jamb Seals for either entrance or overhead doors by installing header first, then measure for jamb seal. Mount so brush is flexed slightly against the door to ensure complete seal and to compensate for wind deflection.

Mount Sweep so brush just touches floor or top of threshold.

Mount Astragal Seals so brushes just touch in the center of gap between doors.

Piece the Brush when door dimensions exceed stocked weatherseal lengths. "Splice" 2 or more pieces together by staggering the brush and holder joints.



8000 Whitepine Road Richmond, VA 23237 | weatherseal@sealeze.com | www.sealeze.com
phone: 804-743-0982 fax: 804-743-3413 | toll free phone: 800-446-7325 fax: 800-448-2908

PCCAT0809