

SECTION E

PANIC EXIT DEVICES

E-1	ED-500 Series Touch Bar Panic Exit Device	E-18	Knob Lock & Mortise Cylinder Panic Lock
E-2	ED-500 Series Touch Bar Panic Exit Device	E-19	Knob Lock & Mortise Cylinder Panic Lock
E-3	F-ED500 Series UL Fire Rated Touch Bar Panic Exit Device	E-20	ED-300 Series Conventional Panic Exit Devices
E-4	F-ED500 Series UL Fire Rated Touch Bar Panic Exit Device	E-21	ED-300 Series Conventional Panic Exit Devices
E-5	VR-531 Series Touch Bar Panic Exit Device with Vertical Rods	E-22	VR-331 Series Conventional Panic Exit Device with Vertical Rods
E-6	VR-531 Series Touch Bar Panic Exit Device with Vertical Rods	E-23	VR-331 Series Conventional Panic Exit Device with Vertical Rods
E-7	F-VR531 Series Fire Rated Touch Bar Panic Exit Device with Vertical Rods	E-24	ED-200 Series Conventional Deluxe Panic Exit Device
E-8	F-VR531 Series Fire Rated Touch Bar Panic Exit Device with Vertical Rods	E-25	ED-200 Series Conventional Deluxe Panic Exit Devices
E-9	BKL-500 Panic Device Ball Knob Lock	E-26	VR-231 Series Conventional Panic Exit Device with Vertical Rods
E-10	BKL-510 & LHL-510 Passage Locks	E-27	VR-231 Series Conventional Panic Exit Device with Vertical Rods
E-11	DX-N-LHL500 & DX-N-LHL580 Key-In-Lever-Locks	E-28	ED-800 Series Narrow Stile Exit Devices
E-12	Key-In-Lever-Lock Mounting Instructions	E-29	ED-800 Series Narrow Stile Exit Devices
E-13	Key-In-Lever-Lock Mounting Instructions	E-30	Electric Strikes For Rim Exit Devices
E-14	Thumb Latch & Mortise Cylinder Panic Lock	E-31	EAK 500 Touch Bar Device with Alarm Kit
E-15	Thumb Latch & Mortise Cylinder Panic Lock		
E-16	Lever Lock & Mortise Cylinder Panic Lock		
E-17	Lever Lock & Mortise Cylinder Panic Lock		

TRANS-ATLANTIC CO


440 Fairmount Ave., Phila., PA 19123

PH: 215-629-0400 • 800-523-9956

FX: 215-629-1282 • 800-531-0844


A GREAT SELECTION OF PANIC DEVICES, TRIM PACKS & ACCESSORIES

VERTICAL ROD

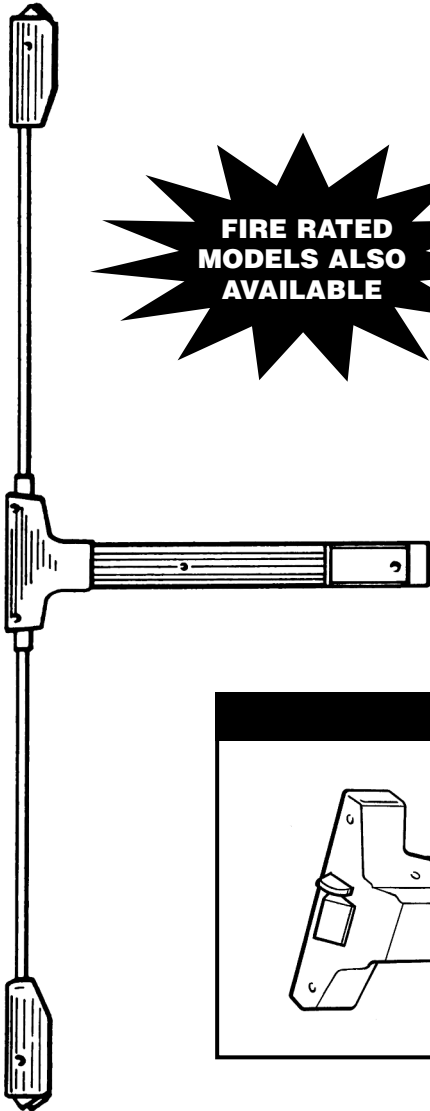


**FIRE RATED
MODELS ALSO
AVAILABLE**


EXTERIOR TRIM

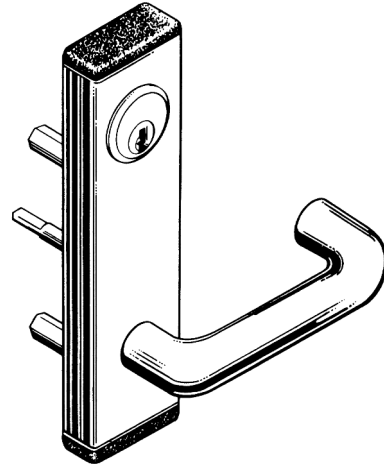


TOUCH BAR

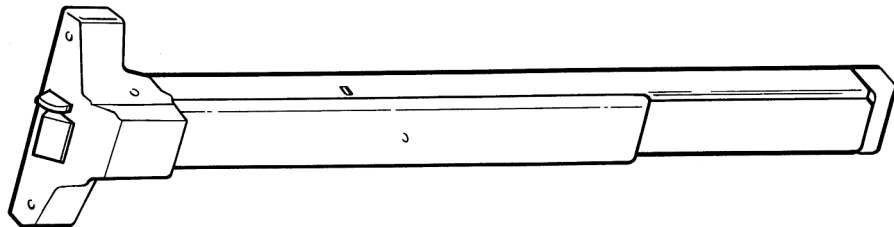


ALARM KIT



RIM CYLINDER



PULL PLATE



SOLID ALUMINUM PULL



REVERSIBLE - RIM TYPE ED-500 SERIES TOUCH BAR EXIT DEVICES

ED-501

Wrought Steel, Painted - 4 finishes

ED-511


Wrought Steel, Highly Polished Plated - 2 finishes

A "first" in a touch bar type...


ED-S551

All Stainless Steel Model with all parts both internal & external made of stainless steel, with 3 parts solid brass. Fasteners & accessories stainless steel too.

E



Underwriters Laboratories
Listed for
USA and
Canada

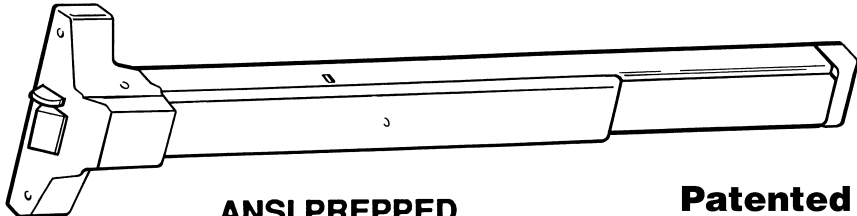

ANSI PREPPED **Patented**

ALL ED500 series panic devices are available with our EAK500 alarm kit at \$30.00 extra.

Features:

- Meets template requirements #161 cylindrical lock prep.
- Dead latching • Non-Handed • Hex key dogging
- Easy installation • Minimum working parts
- Available with many types of exterior access accessories

Finishes: 4 Baked Enamel Finishes, US32D, plus 3 polished finishes: US3, US26, US32

- US32D Satin Stainless Steel (specify ED-S551)
- Satin Aluminum (suffix A to Device Number — ED501A)
- Satin Gold Bronze (suffix B to Device Number — ED501B)
- Satin Duronodic (suffix D to Device Number - ED501D)
- Satin Brass (suffix SB to Device Number - ED501SB) **NEW**
- Polished Brass (suffix PB), Polished Chrome (suffix CMP)
- Polished Stainless Steel (suffix PSS)

Packing:



- One Device per box — 6 per master carton
- Each unit packed with rim strike, shim, complete kit of fasteners including mounting templates, and instructions.
- Blank filler plate for lock backset, blank ANSI Strike for frame, 4 sex bolts complete available.

Functions: ED501, ED511, ED-S551 Exit Only

- For functions with outside operation or trim, add trim numbers per trim pack description.


Door Size:

- For all doors up to 36" wide specify ED-501, ED-511 or ED-S551
- For doors up to 48" wide specify ED-501XL, ED-S551XL, ED-511XL

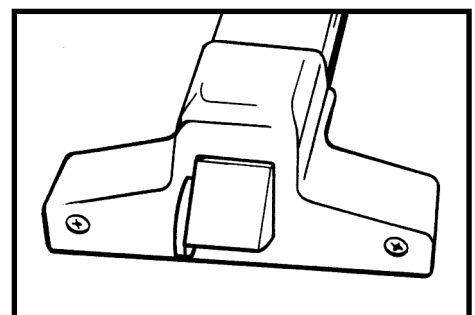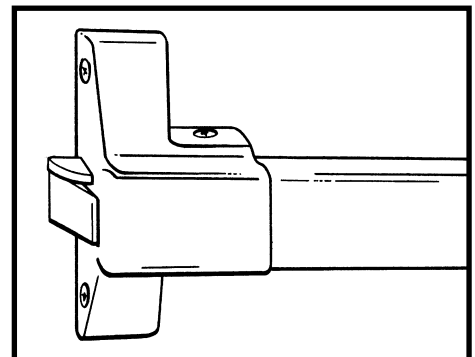

ED-500 ED-S551 SERIES RIM TYPE—ANSI PREPPED TOUCH BAR EXIT DEVICE

NOW UL UNDERWRITER LABORATORIES TESTED LISTED LISTING #45R7

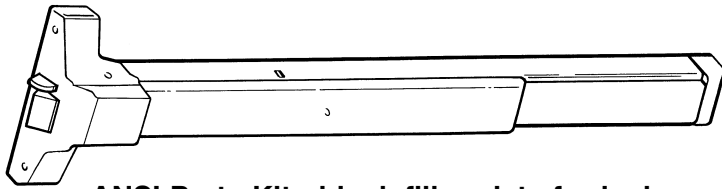

ANSI Parts Kit - blank filler plate for lock, backset blank ANSI Strike for frame, and sex bolts complete - add \$ ea.

Price for Exit Device Only —

ED501	ED511	ED-S551
Price for Exit Device Only — XL Model includes Strike		
ED501-XL	ED511-XL	ED-S551-XL

Priced in case lots of 6. Less than case lots add 10%

When ordering for wide doors 42" and up specify XL after Model Number - EXAMPLE: ED501-XL

When ordering without ANSI Kit, specify X before Model Number - EXAMPLE: X-ED501

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.


ED-PSS 551 ED-PSS 551-XL

IF AN ALL STAINLESS STEEL TOUCH BAR EXIT DEVICE LIKE OUR MODEL ED-S551 WAS MADE AVAILABLE FROM ANY OTHER MFG. THE NET DISTRIBUTOR COST WOULD BE NEARLY \$350.

POLISHED STAINLESS STEEL

ANSI KIT #1

Unless you specify it, we will include this kit with all ED-500 and EDS-551 units ordered at \$ extra. The kit includes: Lock Front Filler, Strike Filler and Sex Bolts.

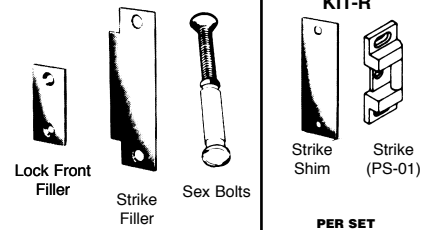

OUTSIDE TRIM — ALL TRIM WILL COVER #161 CYLINDRICAL LOCK PREP — ANSI A115.2 AND A115.3

No. RC-051

RIM CYLINDER COMPLETE
Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.
For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.
Finishes:
Satin Chrome
Duronodic

No. PL-01 No. PL-02

3" X 10" Plate
Solid Aluminum
Aluminum or Brass Anodized

No. PP-05 No. PP-06

PULL PLATE
Wrought Steel, Painted - 3 finishes
Polybagged with plated carriage bolts

No. P-08

SOLID ALUMINUM PULL
1" wide x 8" long from center to center of screw holes. Solid aluminum.
Finishes:
US28 Satin Aluminum
US4 Satin Brass
Duronodic

BKL-500 (Entry)
BKL-530 (Entry - 1 3/8" Doors)
BKL-580 (Storeroom)

BALL KNOB KEY LOCK

US32D
US3
US10B

LEVER HANDLE KEY LOCK

DX-LHL-500 (Entry)
DX-LHL-580 (Storeroom)

Standard key function for panic device. Cylinder locks or unlocks lever. When unlocked lever retracts latch bolt.

US26D
Bright Brass
US10B

EXIT ONLY

EXIT WITH BALL KNOB, CYLINDER, KEY LOCK

EXIT WITH RIM CYLINDER & WING TIP PULL PLATE

Quantity Discounts

24 Units - less 5%
72 Units - less 15%

48 Units - less 10%
96 Units - less 20%
Less than case lots - add 10%

All accessories are strictly net.
No Extra Discounts

F-ED 500
SERIES



TOUCH BAR EXIT DEVICES
FIRE LISTED

REVERSIBLE • RIM TYPE

F-ED-501

Wrought Steel, Painted - 4 finishes

F-ED-511

Wrought Steel, Highly Polished Plated - 2 finishes


F-ED-S551

All Stainless Steel Model with all parts both internal & external made of stainless steel. Fasteners & ANSI Kit also stainless steel.



Listed

Underwriters
Laboratories
Fire Listed for
USA and
Canada

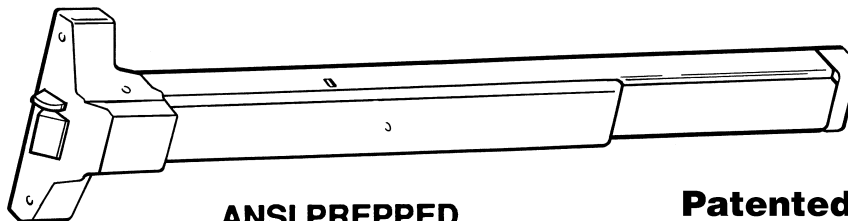

ANSI PREPPED

Patented

ALL ED500 series
panic devices are
available with our
EAK500 alarm kit
at \$30.00 extra.

Features:

Meets template requirements #161 cylindrical lock prep • Dead latching Non-Handed • Stainless Steel Latch Bolt and Deadbolt • Hardened Steel Sex Bolts supplied with fire rated panics • Easy installation • Minimum working parts • Available with many types of exterior access accessories

Finishes: 4 Baked Enamel Finishes, US32D, plus 3 polished finishes: US3, US26, US32

US32D Satin Stainless Steel (specify F-ED-S551)
Satin Aluminum (suffix A to Device Number - F-ED501A)
Satin Gold Bronze (suffix B to Device Number - F-ED501B)
Satin Duronodic (suffix D to Device Number - F-ED501D)
Satin Brass (suffix SB to Device Number - F-ED501SB) **NEW**
Polished Brass (suffix PB), Polished Chrome (suffix CMP)
Polished Stainless Steel (suffix PSS)

Packing:



One Device per box — 6 per master carton
each unit packed with rim strike, shim, complete kit of fasteners including mounting templates and instructions.
Blank filler plate for lock backset, blank ANSI Strike for frame, 4 sex bolts complete-specify

Functions: F-ED501, F-ED511, F-ED-S551 Exit Only

For functions with outside operation or trim, add trim numbers per trim pack description.

Door Size:

For all doors up to 36" wide

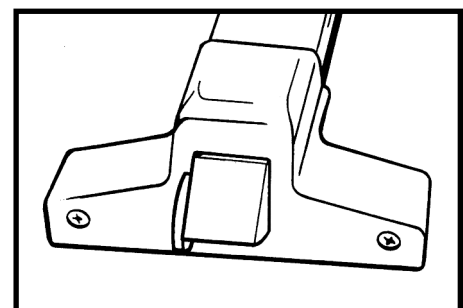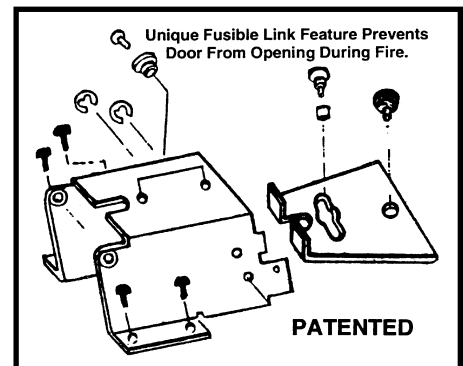


We are pleased to announce the continuous immediate availability of our F-ED500 Series UL Listed Fire Rated Rim Exit Devices. This series is equal in quality and construction to leading USA made brands, yet offered at substantial savings.

F-ED 500 SERIES

FIRE RATED RIM EXIT DEVICES

UNDERWRITERS LABORATORIES TEST AND FIRE RATED

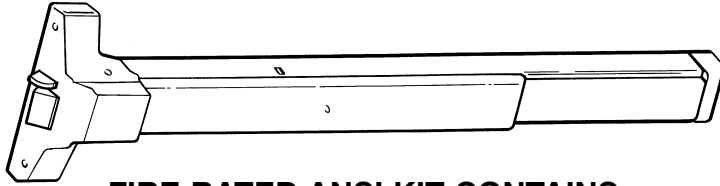

FIRE RATED ANSI KIT CONTAINS:
ANSI Strike for frame,
5 steel sex bolts complete - add \$

Price for Exit Device Only —

F-ED501	F-ED511
F-ED-S551	F-ED-PSS551

Priced in case lots of 6. Less than case lots add 10%

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

When ordering without ANSI Kit, specify X before Model Number - EXAMPLE: X-F-ED501

PLEASE NOTE ALL FIRE RATED EXIT DEVICES SUPPLIED WITH HARDENED STEEL SEX BOLTS

IF AN ALL STAINLESS STEEL TOUCH BAR EXIT DEVICE LIKE OUR MODEL F-ED-S551 WAS MADE AVAILABLE FROM ANY OTHER MFG. THE NET DISTRIBUTOR COST WOULD BE APPROX. \$500.

ANSI KIT #2


Unless you specify it, we will include this kit with all F-ED-500 and F-EDS-551 units ordered at \$ extra. This kit includes, Strike Filler and Sex Bolts.



Strike Filler



5 Sex Bolts



Strike Shim

Strike (PS-01)

KIT-R

PER SET

OUTSIDE TRIM — ALL TRIM WILL COVER #161 CYLINDRICAL LOCK PREP — ANSI A115.2 AND A115.3

No. RC-051

RIM CYLINDER COMPLETE
Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.
For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.
Finishes:
Satin Chrome
Duronodic

No. PL-01 No. PL-02

3" X 10" Plate
Solid Aluminum
Aluminum or Brass Anodized

No. PP-05 No. PP-06

PULL PLATE
Wrought Steel, Painted - 3 finishes
Polybagged with plated carriage bolts

No. P-08

SOLID ALUMINUM PULL
1" wide x 8" long from center to center of screw holes. Solid aluminum.
Finishes:
US28 Satin Aluminum
US4 Satin Brass
Duronodic

BKL-500 (Entry)
BKL-530 (Entry - 1 3/8" Doors)
BKL-580 (Storeroom)

BALL KNOB KEY LOCK

US32D
US3
US10B

LEVER HANDLE KEY LOCK

DX-LHL-500 (Entry)
DX-LHL-580 (Storeroom)
Standard key function for panic device. Cylinder locks or unlocks lever. When unlocked lever retracts latch bolt.

US26D
Bright Brass
US10B

EXIT ONLY

EXIT WITH BALL KNOB, CYLINDER, KEY LOCK

EXIT WITH RIM CYLINDER & WING TIP PULL PLATE

Quantity Discounts

24 Units - less 5%
72 Units - less 15%

48 Units - less 10%
96 Units - less 20%
Less than case lots - add 10%

All accessories are strictly net.
No Extra Discounts

VR-531 TOUCH BAR SERIES

SURFACE MOUNTED • REVERSIBLE • RIM TYPE VERTICAL ROD TYPE



ADDITIONAL MODELS

VR-S5531
VR-S5531-XL
Solid Stainless Steel

VR-5311PB
VR-5311XL-PB
Polished Brass

VR-5311CMP
VR-5311XL-CMP
Polished Chrome

**Solid Stainless Steel
Vertical Rod Model**

TOUCH BAR MODEL

**THIS MODEL IS
AVAILABLE FOR
USE WITH DOORS
UP TO 10' HIGH.
(PLEASE REQUEST
EXTRA LONG
RODS WHEN
ORDERING).**

SPECIFICATIONS & FEATURES

- Meets template requirements #161 cylindrical locked prepped doors and frames
- Available with most popular types of exterior access accessories
- Minimum working parts
- Easy installation
- Non-handed

FINISHES

4 Baked Enamel Finishes

- Satin Alum. (suffix A to Device No. VR-531)
- Satin Brass (suffix SB to Device No. VR-531) **NEW**
- Satin Gold Bronze (suffix B to Device No. VR-531)
- Satin Durododic (suffix D to Device No. VR-531)
- Stainless Steel (suffix VRS-5531)
- Polished Brass (suffix PB to Device No. VR-5311)
- Polished Chrome (suffix CMP to Device No. VR-5311)

PACKING

- One device per box - 6 per master carton
- Each unit packed with Rim Strike, Shim, complete kit of fasteners including mounting templates and instructions
- Blank filler plate for lock backset, Blank ANSI Strike for frame, 4 sex bolts complete available

FUNCTIONS

For functions with outside operation or trim, add trim numbers per trim pack description

DOOR SIZE

- For all doors up to 38" in width, 84" in height, specify Model VR-531.
- Wider doors up to 48" in width, specify VR531-XL

PAIR OF DOORS





- Useable on pairs of doors; 2 vertical rod type or 1 VR531 and 1 ED501 (use strike #PS-09)

DOGGING

- with Hex Key Dogging


ALL ED500 series panic devices are available with our EAK500 alarm kit at \$30.00 extra.

**UL Listed
Underwriters
Laboratories
Listed for USA
and Canada**



VR 531 SERIES

TOUCH BAR SERIES • ANSI PREPPED • RIM TYPE VERTICAL ROD EXIT DEVICE

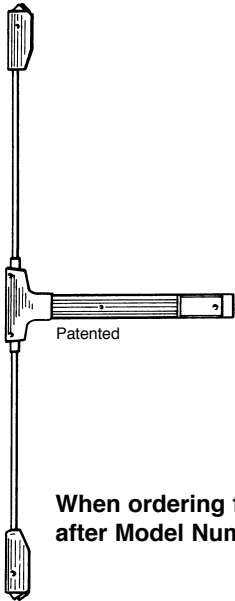

Patented

This model available for use with doors up to 10' high. Specify extra long rods when ordering


This model available for use with doors up to 8' high. Specify 12" rod extension w/coupling

When ordering for wide doors 42" and up specify XL after Model Number - EXAMPLE: VR531-XL


PRICE FOR EXIT ONLY MODEL VR531 ALU/DURO/BRZ	PRICE FOR EXIT ONLY MODEL VR531-XL ALU/DURO/BRZ
PRICE FOR EXIT ONLY MODEL VR5311 PB & CMP	PRICE FOR EXIT ONLY MODEL VR5311-XL PB & CMP
PRICE FOR EXIT ONLY MODEL VR5531 US32D	PRICE FOR EXIT ONLY MODEL VR5531-XL US32D
Priced in case lots of 6. Less than case lots add 10%	

ANSI KIT #1

Unless you specify it, we will include this kit with all VR531 units ordered at \$ extra. The kit includes: Lock Front Filler, Strike Filler and Sex Bolts.




KIT-R




PER SET

No. TL-21
Top Pullman Latch



No. BL-22
Bottom Pullman Latch



Pullman latches supplied as standard with all VR-531 Vertical Rod Devices. Bottom Latch without hold-open feature

No. PS-03

No. PS-10

Used in conjunction with Rim Devices VR331 or VR531




Regular Strike For VR531
Standard Strike PS03 supplied with all pullman latches with vertical rod devices (top and bottom latch)

Recessed Strike
When recessed strike is necessary PS10 supplied for bottom pullman latch

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

OUTSIDE TRIM — ALL TRIM WILL COVER #161 CYLINDRICAL LOCK PREP — ANSI A115.2 AND A115.3



No. RC-051

RIM CYLINDER COMPLETE



Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.

For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.


Finishes:
Satin Chrome
Duronodic

No. PL-01

No. PL-02



No. P-08
SOLID ALUMINUM PULL





3" X 10" Plate
Solid Aluminum
and Brass

Finishes:
US28 Satin
Aluminum
US4 Satin Brass
Duronodic

No. PP-05

No. PP-06




PULL PLATE

Wrought Steel, Painted - 3 finishes
Polybagged with plated carriage bolts

No. PS-09

OVERLAPPING STRIKE



For pair of doors, rim and vertical rod application, use overlapping strike no. PS-09

BKL-500 (Entry)
BKL-530 (Entry - 1 3/8" Doors)
BKL-580 (Storeroom)

BALL KNOB KEY LOCK




US32D
US3
US10B

LEVER HANDLE KEY LOCK

LHL-500 (Entry)
LHL-580 (Storeroom)


Standard key function for panic device. Cylinder locks or unlocks lever. When unlocked lever retracts latch bolt.



US26D
Bright Brass
US10B


No. LP-01
LIP PULL

Finishes
Painted
Finishes
Aluminum
Bronze
Duronodic



US32D- Stainless Steel

EAK-500
Exit Alarm Kit



This alarm monitors the use of exit. When touch bar is depressed horn sounds an audible signal.

Quantity Discounts

24 Units - less 5%
72 Units - less 15%

48 Units - less 10%
96 Units - less 20%

Less than case lots - add 10%


All accessories are strictly net.
No Extra Discounts

F-VR 531 SERIES



UNDERWRITERS LABORATORIES FIRE LISTED

SURFACE MOUNTED • REVERSIBLE • RIM TYPE VERTICAL ROD EXIT DEVICE • TOUCH BAR MODEL

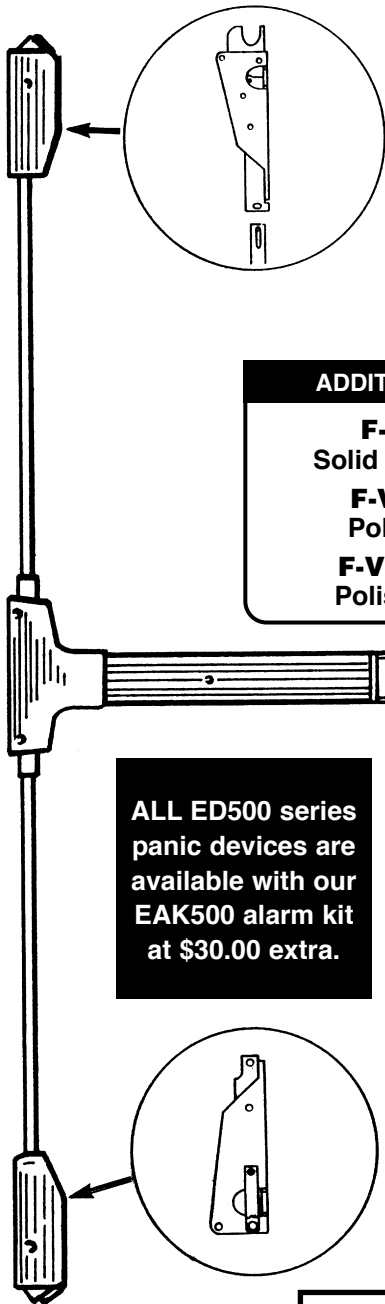

Top Latch Contains Patented Fusible Link Feature To Guarantee Top Latch Stays Locked During Fire

Top Rod Contains Patented Fusible Link Feature That Deactivates Top Rod in Case Of Fire And Helps Keep Door Bolted

ADDITIONAL MODELS

F-VR-S5531
Solid Stainless Steel

F-VR-531PB
Polished Brass

F-VR-531CMP
Polished Chrome

ALL ED500 series panic devices are available with our EAK500 alarm kit at \$30.00 extra.



Underwriters
Laboratories
Fire Listed for
USA and Canada

Bottom Latch Contains Patented Fusible Link Feature To Guarantee Bottom Latch Stays Locked During Fire

SPECIFICATIONS & FEATURES

- 3 Meets template requirements #161 cylindrical locked prepped doors and frames
- Available with most popular types of exterior access accessories
- Minimum working parts
- Patented fusible links in both top & bottom latches
- Easy installation
- Patented fusible links in top vertical rod
- Non-handed

FINISHES

- 4 Baked Enamel Finishes
- Satin Alum. (suffix A to Device No. F-VR531)
- Satin Brass (suffix SB to Device No. F-VR531) **NEW**
- Satin Gold Bronze (suffix B to Device No. F-VR531)
- Satin Durodonic (suffix D to Device No. F-VR531)
- Stainless Steel (suffix F VRS5531)
- Polished Brass (suffix PB to Device No. F-VR5311)
- Polished Chrome (suffix CMP to Device No. F-VR5311)

PACKING

- One device per box - 6 per master carton
- Each unit packed with Rim Strike, Shim, complete kit of fasteners including mounting templates and instructions
- Blank filler plate for lock backset, Blank ANSI Strike for frame, 9 hardened steel sex bolts

FUNCTIONS

- For functions with outside operation or trim, add trim numbers per trim pack description





DOOR SIZE

- For all doors up to 38" in width, 84" in height

PAIR OF DOORS


- Useable on pairs of doors; 2 vertical rod type or 1 F-VR531 and 1 F-ED501 (Use strike #PS-09)

PATENTED



F-VR 531 SERIES

TOUCH BAR SERIES VERTICAL ROD EXIT DEVICE

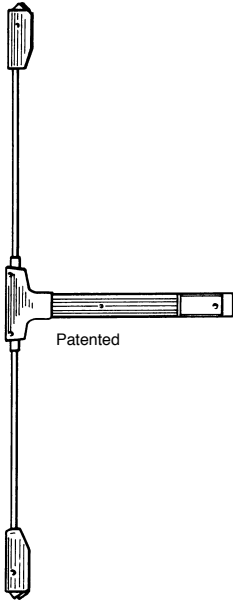

Patented

PRICE FOR EXIT ONLY MODEL F-VR531 COMPLETE
Aluminum, Durodonic and Bronze
PRICE FOR EXIT ONLY MODEL F-VR5311
Polished Brass and Polished Chrome
PRICE FOR EXIT ONLY MODEL F-VRS531 COMPLETE
Solid Stainless Steel/Satin
Priced in case lots of 6. Less than case lots add 10%

FIRE RATED ANSI PREPPED RIM TYPE

ANSI KIT #3

Unless you specify it, we will include this kit with all F-VR531 and F-VRS531 units ordered at \$ extra. The kit includes: Filler Strike and 9 hardened Steel Sex Bolts.



1 Strike Filler




9 Sex Bolts

KIT-R



Strike Shim




Strike (PS-01)

PER SET

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

No. TL-21
Top
Pullman
Latch



No. BL-22
Bottom
Pullman
Latch

Pullman latches supplied as standard with all VR-531 Vertical Rod Devices. Bottom Latch without hold-open feature

No. PS-03

No. PS-10

Used in conjunction with Rim Devices VR331 or VR531




Regular Strike For VR531
Standard Strike PS03 supplied with all pullman latches with vertical rod devices (top and bottom latch)



Recessed Strike
When recessed strike is necessary PS10 supplied for bottom pullman latch

OUTSIDE TRIM — ALL TRIM WILL COVER #161 CYLINDRICAL LOCK PREP — ANSI A115.2 AND A115.3



No. RC-051

RIM CYLINDER COMPLETE


Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.

For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.


Finishes:
Satin Chrome
Durodonic

No. PL-01

No. PL-02




3" X 10" Plate
Solid Aluminum
and Brass





No. P-08
SOLID ALUMINUM PULL

Finishes:
US28 Satin
Aluminum
US4 Satin Brass
Durodonic



No. PP-05

No. PP-06




PULL PLATE

Wrought Steel, Painted - 3 finishes

Polybagged with plate carriage bolts

No. PS-09

OVERLAPPING STRIKE



For pair of doors, rim and vertical rod application, use overlapping strike no. PS-09

BKL-500 (Entry)
BKL-530 (Entry - 1 3/8" Doors)
BKL-580 (Storeroom)

BALL KNOB KEY LOCK



US32D
US3
US10B


LEVER HANDLE KEY LOCK

DX-LHL-500 (Entry)

DX-LHL-580 (Storeroom)


Standard key function for panic device. Cylinder locks or unlocks lever. When unlocked lever retracts latch bolt.

US26D
Bright Brass
US10B




No. LP-01
LIP PULL

Finishes
Painted
Finishes
Aluminum
Bronze
Durodonic



US32D- Stainless Steel

EAK-500
Exit Alarm Kit



This alarm monitors the use of exit. When touch bar is depressed horn sounds an audible signal.

Quantity Discounts

24 Units - less 5% discount 48 Units - less 10%
72 Units - less 15% discount 96 Units - less 20%
Less than case lots - add 10%

All accessories are strictly net.
No Extra Discounts

EXTERIOR TRIM FOR TOUCH BAR SERIES PANIC DEVICES

Key Lock Ball Knob Design. Deluxe Heavy Construction



A New Improved Spindle Latch Mechanism to make the removal of the cylinder easier and more efficient.

- Please note knob lock is equipped with a **unique new "patented feature"**.
- Feature is novel for this type of device. Will make it usable on **all brands**, types and models of surface rim mounted panic exit devices, **both handed and non-handed**.
- Also model BKL500 available for use with 1 $\frac{3}{8}$ " thick doors when ordering. **Specify BKL530.**

MANY NEW POPULAR COMMERCIAL FINISHES

MODEL - BKL500

Standard key function for panic device. Can be set in locked or unlocked position. Cylinder locks or unlocks knob. When unlocked, knob retracts latch bolt.

MODEL - BKL580

Rigid knob, key function similar storeroom function. Can only be operated by key.


NET PRICES EA.

MODEL NO.	FINISH	PRICE
BKL500	US32D	
	US3	
	US10B	
BKL580	US32D	
	US3	
	US10B	
BKL530	US32D	
	US3	
	US10B	

If supplied without cylinder – Deduct \$ per lock
Add tail piece TP-LI to adapt Lori 6 pin cylinder
– \$ ea.

PACKED: 20 PER MASTER CARTON

QUANTITY DISCOUNTS	26 UNITS — LESS 10%
	60 UNITS — LESS 15%
	100 UNITS — LESS 20%

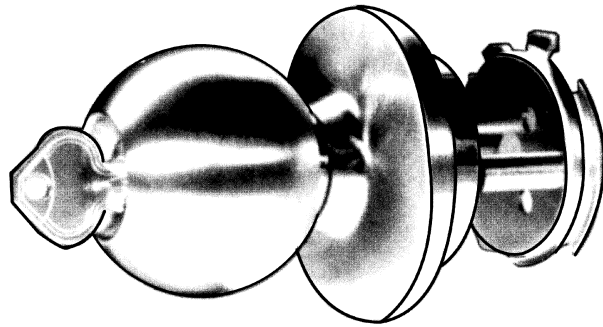


Patent Being Applied For

- The most modern exterior access for touch bar #161 ANSI cylindrical lockset prepped hollow steel doors. **ANSI A115.2 and A115.3.**
- Available in:
 - US32D - Satin Stainless
 - US3 - Polished Brass
 - US10B Oil Rubbed Bronze
- Available with 6 pin tumbler Schlage C keyway, Russwin D1 keyway and Corbin 60 keyway.

Unless One of Our Stock Keyways is Specified, We will Ship, At Random, Any of The Three Popular Keyways That We Stock.

- Also available without cylinder for use with several brands of replacement cylinders, in many popular keyways.
- **Can be used with LORI 6 pin tumbler variable keyway cylinders with use of our tail piece models TP-L1.**
- This lock can be used with other popular brands of
 - TouCORBIN – #29 SARGENT – #2829
 - RUSSWIN – #372 SIDRO – #S1200
 - VON DUPRIN – #22 and others

When for use with other devices, either conventional handed or Touch Bar Type, specify with mounting plate #PL04.

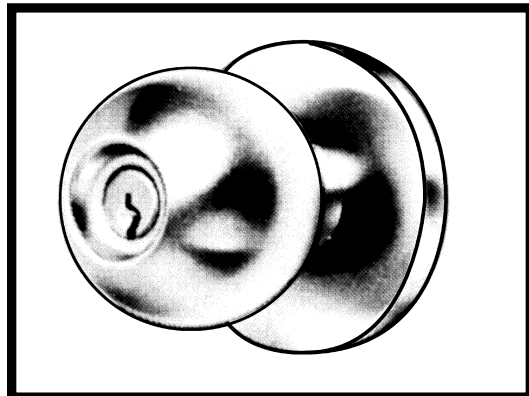

E


Exterior Trim For TOUCH BAR SERIES PANIC DEVICES

Passage Lock

Ball Knob Design Deluxe - Heavy Construction

- Please note lever lock is equipped with a unique "patented" feature.
- Feature is novel for this type of device. Will make it usable on all brands, types and models of surface rim mounted panic exit devices, both handed and nonhanded.
- The most modern Passage Trim for touch bar #161 ANSI Cylindrical lockset prepped hollow steel doors, ANSI A115.2 and ANSI A115.3
- These locks available in US32D-Satin Stainless
 - US3-Polished Brass

MODEL NO.	FINISH	PRICE
BKL510	US32D US3	
Quantity Discounts	20 Units-LESS	10%
	60 Units-LESS	15%
	100 Units-LESS	20%

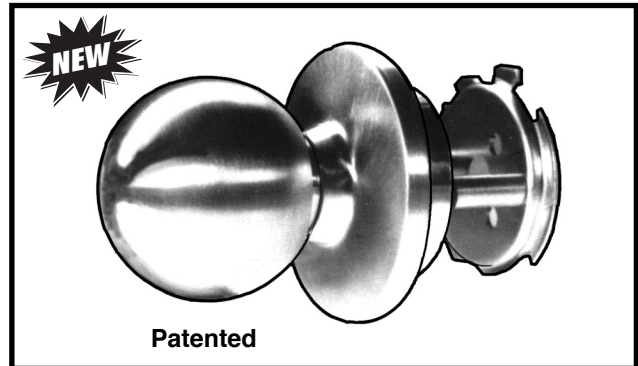

Model:

BKL510

Standard Passage function for panic device.


When for use with other devices, either conventional Handed or Touch Bar Type specify with mounting Plate #PL04.

Passage Lock

Lever Handle Design Deluxe - Heavy Construction

- Please note lever lock is equipped with a unique "patented" feature.
- Feature is novel for this type of device. Will make it usable on all brands, types and models of surface rim mounted panic exit devices, both handed and nonhanded.


CONFORMS TO ALL A.D.A. HANDICAP CODES & CONFORMS WITH ALL ACCESSIBILITY CODES

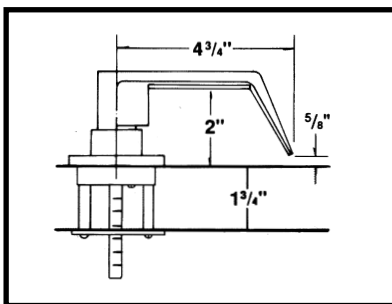

When for use with other devices, either conventional Handed or Touch Bar Type specify with mounting Plate #PL04.

BRIGHT BRASS FINISH IS NOT A HIGHLY POLISHED US3 FINISH BUT A GOOD BRIGHT BRASS FINISH

MODEL NO.	FINISH	NET PRICE
LHL510	US26D BRIGHT BRASS	NEW NEW
Quantity Discounts	20 Units-LESS	10%
	60 Units-LESS	15%
	100 Units-LESS	20%

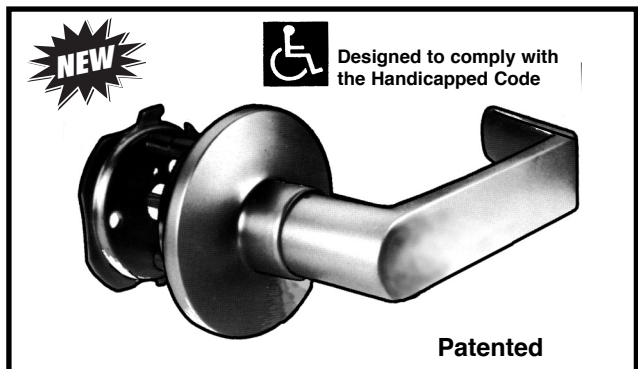

THE FINEST QUALITY AND STRONGEST CONSTRUCTION FOR A STANDARD DUTY LEVER LOCK. NO WOBBLE OR RATTLE IN SPINDLE.

The most modern and functional Exterior Access for #161 ANSI Cylindrical lockset prepped hollow steel doors, ANSI A115.2 and ANSI A115.3

Model:



LHL510

Standard Passage trim function for panic device.

THESE ANSI GRADE II LEVER LOCKS SHOULD NOT BE USED ON HEAVY INSTITUTIONAL OR HIGH TRAFFIC DOORS WHERE ANSI GRADE I LOCK IS REQUIRED

NEW IMPROVED KEY-IN-LEVER LOCK KIT

FOR USE WITH MOST BRANDS RIM PANIC EXIT DEVICES

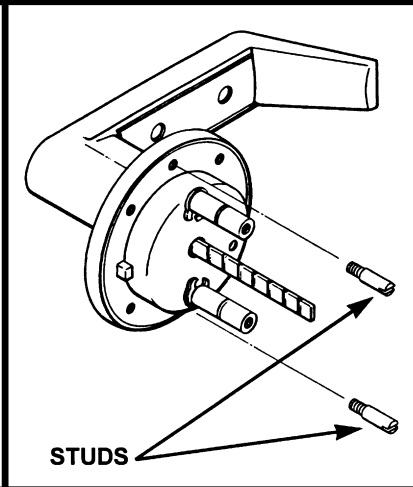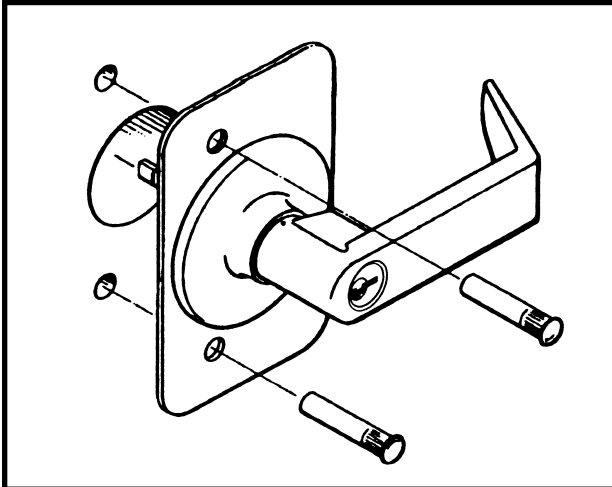

ALL MODELS OF
LEVER KITS NOW
INCLUDE
2-SCREW-IN STUDS
2-SEX BOLTS
1-MOUNTING PLATE
AND AT NO PRICE
INCREASE

E

“TO PREVENT ROTATION IN LOCKED POSITION”, now supplied complete with 2 ANTI-ROTATION MOUNTING STUDS and with New Deluxe Mounting Plate with 2 thru-Bolting Sex Bolts

- The most modern exterior access for touch bar #151 ANSI cylindrical lockset prepped hollow steel doors, ANSI A 115.2 and A115.3. Available with Schlage C, Corbin 60 and Russwin D1 keyways

Can be used with LORI 6 pin tumbler variable keyway cylinders with use of our tail piece models TP-L1

- This lock can be used with other popular brands of Touch Bar Rim Exit Devices:
Corbin-#68 • Sargent-#2829 • Russwin-#372
Sidro-#S1200 • Von Duprin #22 • and others
When for use with other devices, either Conventional Handed or Touch Bar Type specify with mounting plate #PL04

Models:

DX-N-LHL500



Standard key function for panic device, can be set in locked or unlocked position. Cylinder locks or unlocks lever. When unlocked, lever retracts latchbolt.

DX-N-LHL580



Rigid lever, key function similar storeroom function. Can only be operated by key.

Key Lock Lever Handle Design. Deluxe Heavy Construction



A New Improved Spindle Latch Mechanism to make the removal of the cylinder easier and more efficient.

- Please note lever lock is equipped with a unique patented feature which makes these locks usable with handed and nonhanded Rim Exit Devices that are activated by a tail piece.
- This feature is novel for this type of locking device
- **NO OTHER BALL OR LEVER LOCK OFFERS THIS PATENTED DEVICE FEATURE**

CONFORMS TO ALL A.D.A. HANDICAP CODES & CONFORMS WITH ALL ACCESSIBILITY CODES

MODEL NO.	FINISH	NET PRICE
DX-N-LHL500	US26D US3, US10B	
DX-N-LHL580	US26D US3, US10B	
DX-N-LHL530	US26D	

If supplied without cylinder-Deduct \$ per lock
Add tail piece TP-L1 to adapt to a LORI
6 PIN Cylinder \$ ea.
Packed: 20 per master carton

BRIGHT BRASS FINISH IS NOT A HIGHLY POLISHED FINISH. BUT A GOOD BRIGHT BRASS FINISH

Quantity Discounts

20 Units — 10%
60 Units — 15%
100 Units — 20%

NEW IMPROVED KEY-IN-LEVER LOCK KIT

FOR USE WITH MOST BRANDS RIM PANIC EXIT DEVICES

HOW TO USE AND INSTALL OUR ANTI ROTATION MOUNTING STUDS AND/OR DELUXE MOUNTING PLATE COMPLETE WITH SEX BOLTS

Please note that you always consider using mounting studs on any lever operated locking device because of the extra torquing pressure created.

Without the use of mounting studs or the deluxe mounting plate with thru sex bolts, the lever lock may rotate when over torqued in the locked position.

It is simple to install this lever locking device with either the thru bolts or deluxe mounting plate with sex bolts. Just follow these instructions.

WHEN USING LEVER LOCK WITH TWO MOUNTING STUDS:




Firstly, note that we have re-engineered all of our ball and lever locks in a way that they now automatically contain two small cast spurs at the 3:00 and 9:00 o'clock position.

These two small spurs will interface with the small cutouts in most hollow steel doors prepped for a cylindrical lock. (A 2 1/8" diameter hole in face of the door)

These two small spurs will substantially reduce the risk of the lock rotating when torqued in the locked position.

In addition, we have supplied two mounting studs which are used at the 12:00 and 6:00 o'clock positions. To install them, follow the instructions outlined below:

MOUNTING STUDS INSTALLATION

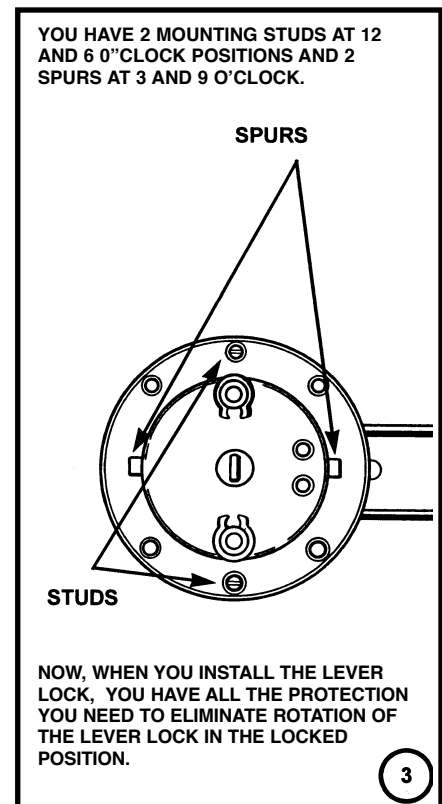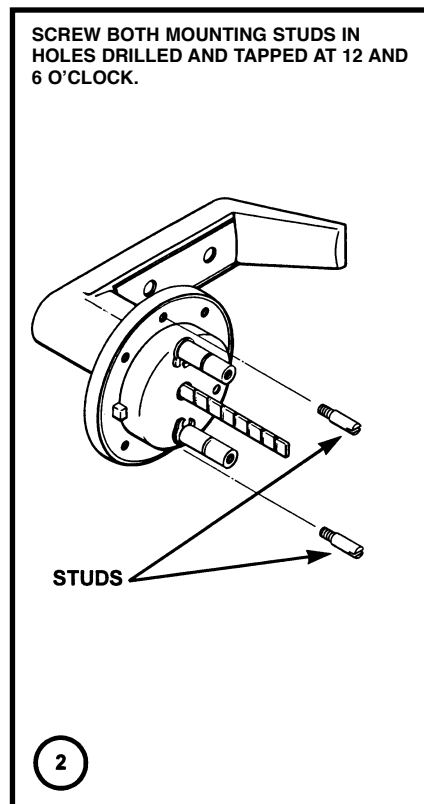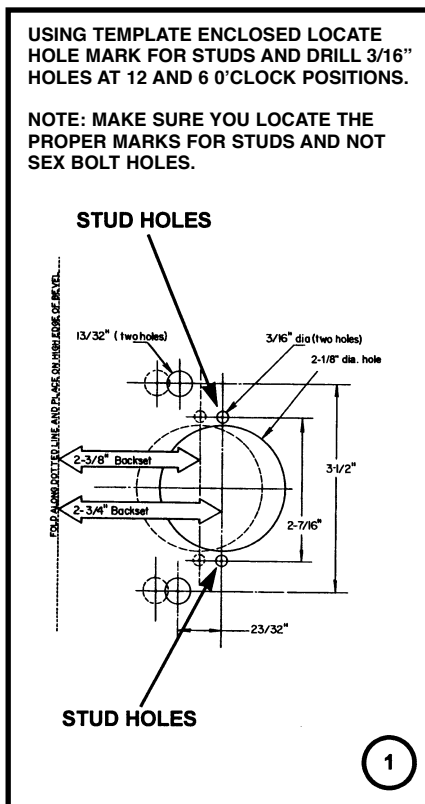


NOW, WHEN YOU INSTALL THE LEVER LOCK, YOU HAVE ALL THE PROTECTION YOU NEED TO ELIMINATE ROTATION OF THE LEVER LOCK IN THE LOCKED POSITION.

NEW IMPROVED KEY-IN-LEVER LOCK KIT

FOR USE WITH MOST BRANDS RIM PANIC EXIT DEVICES


E

Take the mounting plate and attach it to the back flanges side of the lever lock with the use of this four small set screws supplied. Be sure that you position the mounting plate correctly so that it will interface with the position needed for the attaching of the lever lock and mounting plate to our ED500 series panic device with the use of the two sex bolts supplied.

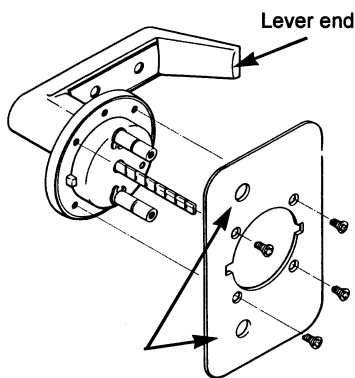

1


Also, be sure that you mount the plate to the lever lock so that the countersunk holes of the mounting plate face away from the lock. Otherwise, the small mounting machine screws for the mounting plate will not lay flat and will protrude above the surface of the mounting plate.

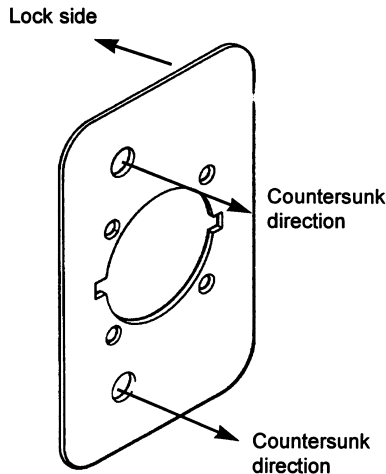

2


After you have properly attached the mounting plate to the lever lock, with the use of the template supplied, drill your holes for the sex bolts supplied.

NOTE: MAKE SURE YOU LOCATE THE PROPER MARKS FOR SEX BOLT AND NOT STUD HOLES.

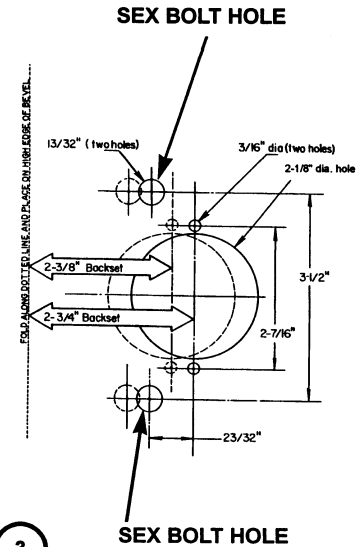


3

Install the panic device and attach it to the lever lock and mounting plate with the use of the two thru sex bolts.

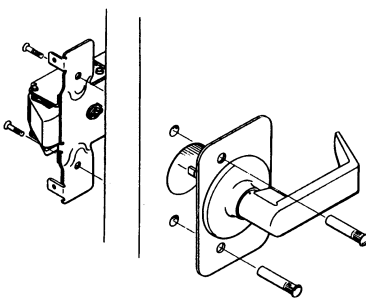

4

This installation is excellent. The lever lock cannot rotate in the locked position.

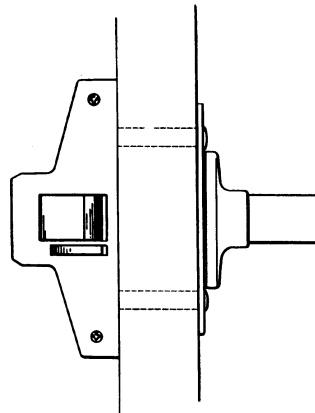

5

Also, if you are using our DX-N-LHL500, DX-N-LHL580 or DX-N-LHL510 with other brands of rim panic devices and if you want to use our deluxe mounting plate, we are in position to supply it in two different ways; one with the holes drilled for the thru rim sex bolts and our standard mounting plate has the two holes drilled.

The model without the two holes drilled permits you to drill the two thru bolt holes in any position to interface with the position needed to interface with the mounting holes of other rim panic devices.

Also, you may consider the following possibility. When using our LHL500 series locks with the deluxe mounting plate and other brands of panics, if you do not want to thru bolt it, you can mount it by drilling four screw holes in the corners of the mounting plate and fasten it to the door with full threaded sheet metal screws.

INTEGRATED THUMB LATCH & MORTISE CYLINDER PANIC LOCK

For use on All types of Commercial Doors including

- ANSI prepped Steel and Wood Doors
- Non ANSI prepped Steel and Wood doors
- Trimline Aluminum Doors. (Specify TP600)

This product can be used with most brands of handed and non handed touch bar and conventional types of Panic Rim Exit Devices.

Unless otherwise specified, orders will be shipped with 2 - 3"x 8" (LTP3X8) TRIM/REINFORCING PLATE as shown in exploded view.

For use with Narrow Stile Trimline Doors, order our Model TP600 without Trim Plates.

Price includes mortise key cylinder

**NEW
WIDE FRAME
MODEL**




LOCK FACE SIZE
2 1/2" WIDE
7 1/4" LONG

This model covers 2 1/8" dia. ANSI prepped door holes

NO. WF-TP600 NON - HANDED

NEW IMPROVED CONSTRUCTION • EASY TO INSTALL

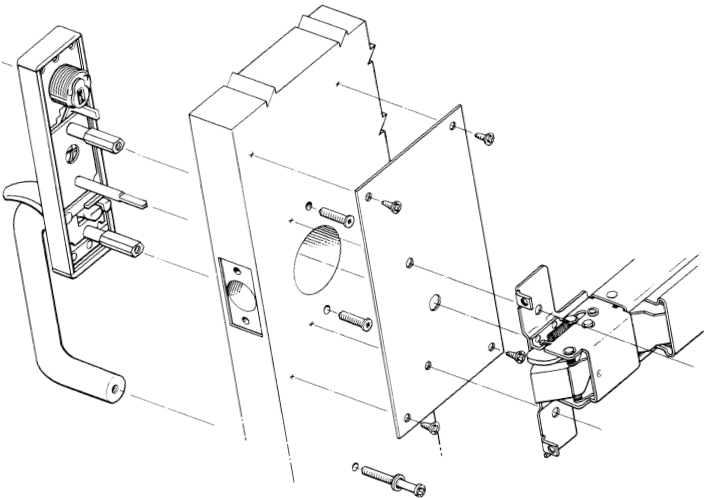



Please note with this model you don't need 3"x 8" Trim Plates. However Trim Plates will enhance the panic and lock installation.

Available in 3 finishes:

- WF-TP600A - ALUMINUM
- WF-TP600D - DURONODIC
- WF-TP600BZ - BRONZE

<h2>PRICE</h2>	<p>WITH TRIM PLATE</p> <p>WITHOUT TRIM PLATE</p> <p>In case lots of 10</p> <p>Add 10% for less than case lot</p>	<h2>QUANTITY DISCOUNT</h2>	<p>50 Lots - less 5%</p> <p>100 Lots - less 10%</p> <p>Can be assorted with WF-L600, WF-K600</p>
----------------	--	----------------------------	--

DOOR HANDING USA STANDARD




DOOR HANDS DETERMINED FROM OUTSIDE

VERY IMPORTANT

IF REHANDING IS REQUIRED, YOU MUST POSITION THE ACTUATOR SHAFT AND CAM ASSEMBLY AS SHOWN IN FIG. 1 AND FIG. 2. OTHERWISE YOU MAY DAMAGE LOCK

NEW IMPROVED CAM ACTION

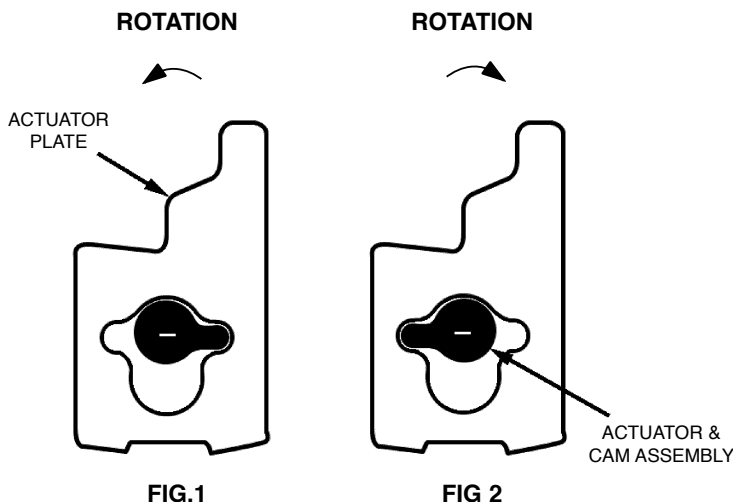

VERY IMPORTANT


1. DO NOT REVERSE THIS LOCK! WHEN USED WITH ANY TOUCH BAR PANIC DEVICE, USE AS PRESET RHR OR LHR.
2. ONLY REVERSE WHEN USED WITH ANY CONVENTIONAL TYPE DEVICE. THEN, FOLLOW ABOVE INSTRUCTIONS CAREFULLY.

TRIM REVERSING INSTRUCTIONS FOR HANDING

FOR HANDED PANIC DEVICES ONLY

- FOR USE WITH TOUCH BAR WITH "CENTER ACCESS HOLE, FIG. A, PAGE 3" NO NEED TO REVERSE HANDING. USE AS IS.
 - FOR USE WITH PANIC DEVICES WITH "TWO ACCESS HOLES, FIG. B, FIG. C, PAGE 3" FOLLOW THESE INSTRUCTIONS TO REVERSE HANDING:
1. Remove top and bottom Hex stud.
 2. Remove backplate Assembly. (Note: Be careful not to disturb or lose internal components.)
 3. Lift up Actuator Shaft and Cam Assembly. Flip over and remove retaining clip at bottom of Actuator Shaft. Remove Cam and flip over to achieve opposite handing desired according to Touch Bar brand, Fig 1 & 2. Reinstall Cam into bottom of Actuator then install Retaining Clip.
 4. Reinstall Actuator and Cam assembly back into Actuator Plate. Note: Actuator Plate stays always in the same position as in Fig 1 & 2.
 5. Reinstall Backplate Assembly (Note: Make sure Actuator Plate is in locked or at rest position)
 6. Screw in top & bottom hex studs. Test to make sure Actuator Shaft rotation is correct and trim functions smoothly. loosen Studs and adjust if required.
 7. Proceed with trim/device installation.

IMPORTANT: YOU MUST ENGAGE CAM EXACTLY AS SHOWN TO PREVENT ANY DAMAGE TO LOCK

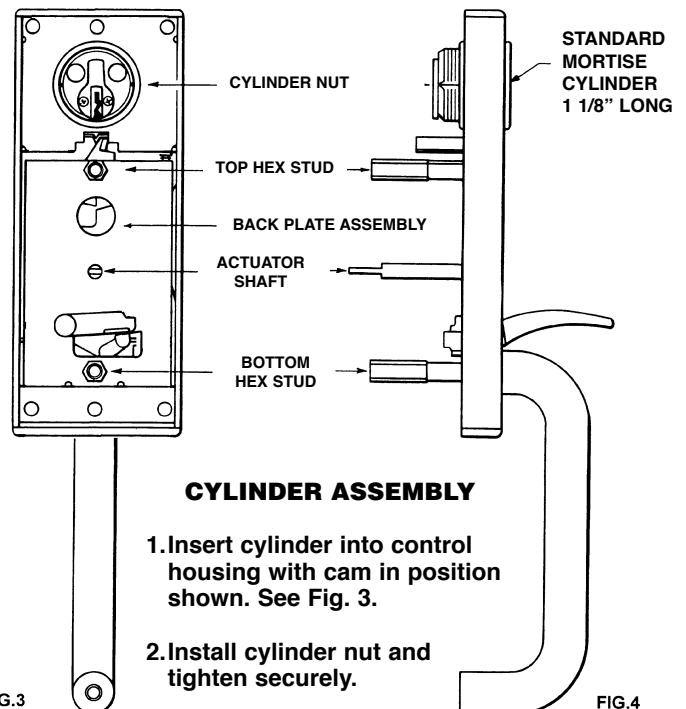

CYLINDER ASSEMBLY

1. Insert cylinder into control housing with cam in position shown. See Fig. 3.
2. Install cylinder nut and tighten securely.

INTEGRATED LEVER LOCK & MORTISE CYLINDER PANIC LOCK

For use on All types of Commercial Doors including

- ANSI prepped Steel and Wood Doors
- Non ANSI prepped Steel and Wood doors
- Trimline Aluminum Doors. (Specify L600)

This product can be used with most brands of handed and non handed touch bar and conventional types of Panic Rim Exit Devices.

Unless otherwise specified, orders will be shipped with 2 - 3" x 8" (LTP3X8) TRIM/REIN-FORCING PLATE as shown in exploded view.

For use with Narrow Stile Trimline Doors, order our Model L600 without Trim Plates.


Price includes mortise key cylinder

**NEW
WIDE FRAME
MODEL**

**LOCK FACE SIZE
2½" WIDE
7¼" LONG**


This model covers 2½" dia. ANSI prepped door holes

NEW

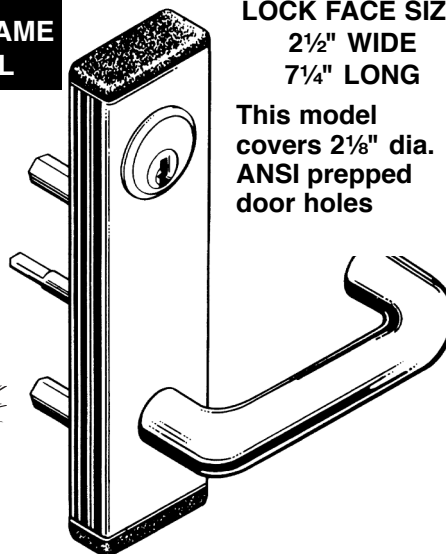

NO. WF-L600 NON - HANDED

NEW IMPROVED CONSTRUCTION • EASY TO INSTALL

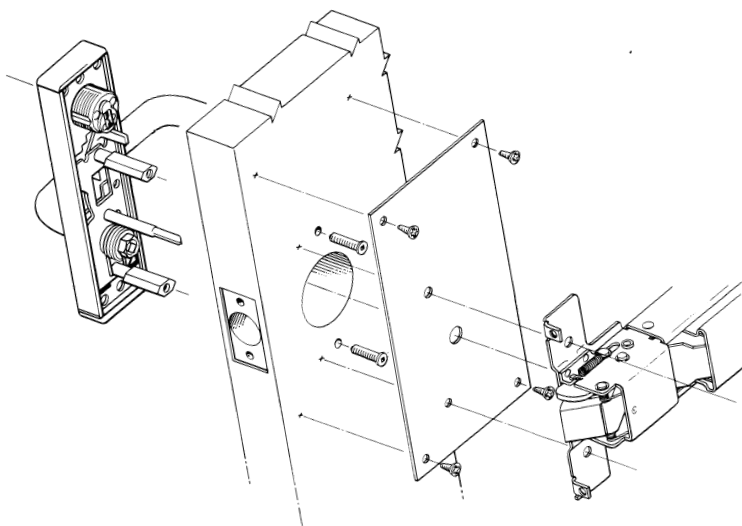

Please note with this model you don't need 3" x 8" Trim Plates.

However Trim Plates will enhance the panic and lock installation.

Available in 3 finishes:

- WF-L600A - ALUMINUM
- WF-L600D - DURONODIC
- WF-L600BZ - BRONZE

**NET
PRICE**

**WITH TRIM
PLATES**

**WITHOUT
PLATES**

In case lots of 10



Add 10% for less than case lot

**QUANTITY
DISCOUNT**

**50 Lots - less 5%
100 Lots - less 10%**

Can be assorted with
WF- TP600,WF- K600

DOOR HANDING USA STANDARD



DOOR HANDS DETERMINED FROM OUTSIDE

VERY IMPORTANT

IF REHANDING IS REQUIRED, YOU MUST POSITION THE ACTUATOR SHAFT AND CAM ASSEMBLY AS SHOWN IN FIG. 1 AND FIG. 2. OTHERWISE YOU MAY DAMAGE LOCK

NEW IMPROVED CAM ACTION

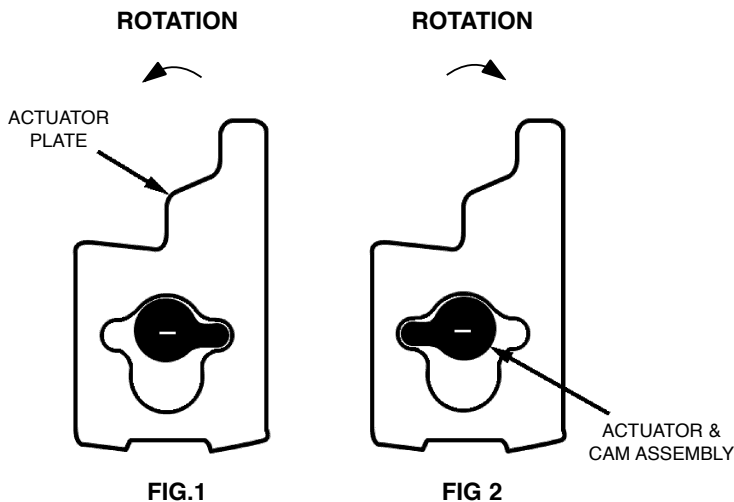


FIG.1

FIG 2

VERY IMPORTANT

1. DO NOT REVERSE THIS LOCK! WHEN USED WITH ANY TOUCH BAR PANIC DEVICE, USE AS PRESET RHR OR LHR.
2. ONLY REVERSE WHEN USED WITH ANY CONVENTIONAL TYPE DEVICE. THEN, FOLLOW ABOVE INSTRUCTIONS CAREFULLY.

TRIM REVERSING INSTRUCTIONS FOR HANDING

FOR HANDED PANIC DEVICES ONLY

- FOR USE WITH TOUCH BAR WITH "CENTER ACCESS HOLE, FIG. A, PAGE 3" NO NEED TO REVERSE HANDING. USE AS IS.
 - FOR USE WITH PANIC DEVICES WITH "TWO ACCESS HOLES, FIG. B, FIG C, PAGE 3" FOLLOW THESE INSTRUCTIONS TO REVERSE HANDING:
1. Remove top and bottom Hex studs, then remove Lever Retaining Nut (A) and Washer(D). Remove Locking Disk (B) while observing its handing which will be reversed later, then remove Spring and Collar Assembly (C).
 2. Pull Lever out and remove backplate Assembly. (Note: Be careful not to disturb or lose internal components.)
 3. Lift up Actuator Shaft and Cam Assembly. Flip over and remove retaining clip at bottom of Actuator Shaft. Remove Cam and flip over to achieve opposite handing desired according to Touch Bar brand, Fig 1 & 2. Reinstall Cam into bottom of Actuator then install Retaining Clip.
 4. Reinstall Actuator and Cam assembly back into Actuator Plate. Note: Actuator Plate stays always in the same position as in Fig 1 & 2.
 5. Reinstall Backplate Assembly and both Top and Bottom Studs. (Note: Make sure Actuator Plate is in locked or at rest position)
 6. Install lever in desired handing. Insert Spring and Collar Assembly (C) onto Lever Shaft. Reverse original handing of Locking Disk (B) by flipping horizontally and install Washer (D) and Lever Retaining Nut (A). Make sure Actuator Shaft rotation is correspondent to desired handing and that trim is functioning properly.
 7. Proceed with trim/device installation.

IMPORTANT: YOU MUST ENGAGE CAM EXACTLY AS SHOWN TO PREVENT ANY DAMAGE TO LOCK

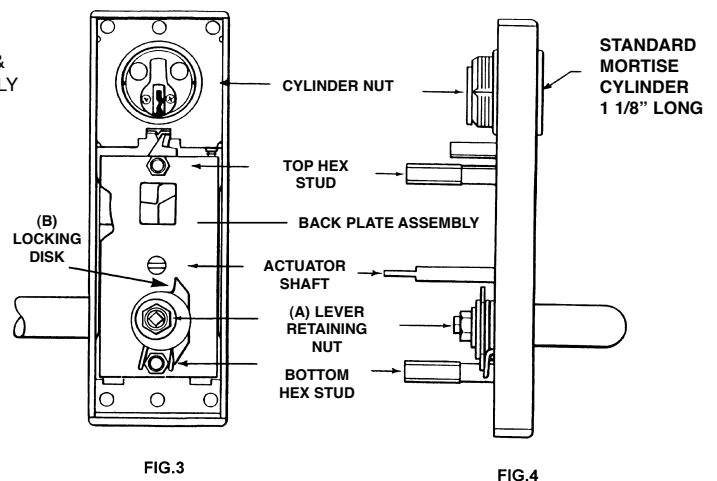


FIG.3

FIG.4

CYLINDER ASSEMBLY

1. Insert cylinder into control housing with cam in position shown. See Fig. 3.
2. Install cylinder nut and tighten securely.

INTEGRATED KNOB LOCK & MORTISE CYLINDER PANIC LOCK

For use on All types of Commercial Doors including

- ANSI prepped Steel and Wood Doors
- Non ANSI prepped Steel and Wood doors
- Trimline Aluminum Doors. (Specify K600)

This product can be used with most brands of handed and non handed touch bar and conventional types of Panic Rim Exit Devices.

Unless otherwise specified, orders will be shipped with 2 - 3"x 8" (LTP3X8) TRIM/REIN-FORCING PLATE as shown in exploded view.


For use with Narrow Stile Trimline Doors, order our Model K600 without Trim Plates.

Price includes mortise key cylinder

**NEW
WIDE FRAME
MODEL**


LOCK FACE SIZE
2½" WIDE
7¼" LONG

This model covers 2⅛" dia. ANSI prepped door holes

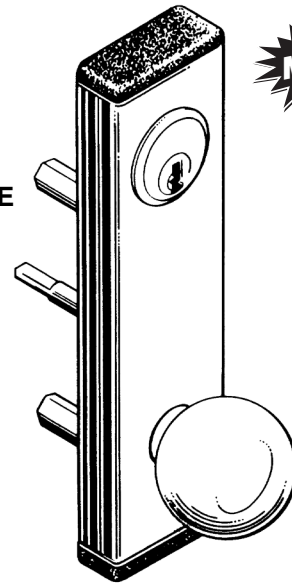

NO. WF-K600 NON - HANDED

NEW IMPROVED CONSTRUCTION • EASY TO INSTALL

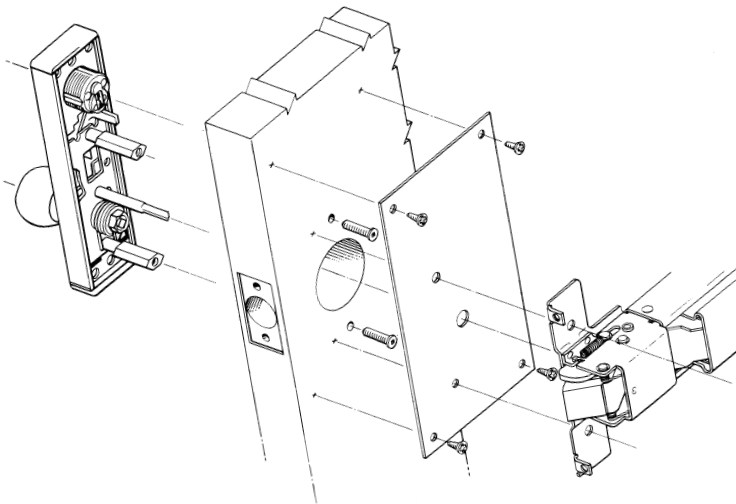

Please note with this model you don't need 3"x 8" Trim Plates.

However Trim Plates will enhance the panic and lock installation.

Available in 3 finishes:

- WF-K600A - ALUMINUM
- WF-K600D - DURONODIC
- WF-K600BZ - BRONZE

**NET
PRICE**

**WITH TRIM
PLATES
WITHOUT
PLATES**



In case lots of 10
Add 10% for less than case lot

**QUANTITY
DISCOUNT**

**50 Lots - less 5%
100 Lots - less 10%**

Can be assorted with
WF- L600, WF- TP600

DOOR HANDING USA STANDARD



DOOR HANDS DETERMINED FROM OUTSIDE

VERY IMPORTANT

IF REHANDING IS REQUIRED, YOU MUST POSITION THE ACTUATOR SHAFT AND CAM ASSEMBLY AS SHOWN IN FIG. 1 AND FIG. 2. OTHERWISE YOU MAY DAMAGE LOCK

NEW IMPROVED CAM ACTION

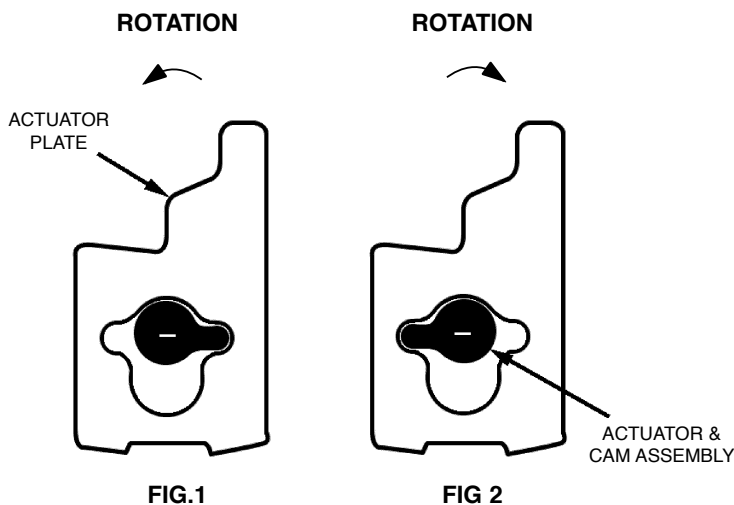


FIG.1

FIG 2

VERY IMPORTANT

1. DO NOT REVERSE THIS LOCK! WHEN USED WITH ANY TOUCH BAR PANIC DEVICE, USE AS PRESET RHR OR LHR.
2. ONLY REVERSE WHEN USED WITH ANY CONVENTIONAL TYPE DEVICE. THEN, FOLLOW ABOVE INSTRUCTIONS CAREFULLY.

TRIM REVERSING INSTRUCTIONS FOR HANDING

FOR HANDED PANIC DEVICES ONLY

- FOR USE WITH TOUCH BAR WITH "CENTER ACCESS HOLE, FIG. A, PAGE 3" NO NEED TO REVERSE HANDING. USE AS IS.
 - FOR USE WITH PANIC DEVICES WITH "TWO ACCESS HOLES, FIG. B, FIG. C, PAGE 3" FOLLOW THESE INSTRUCTIONS TO REVERSE HANDING:
1. Remove top and bottom Hex studs, then remove Knob Retaining Nut (A) and Washer(D). Remove Locking Disk (B) while observing its handing which will be reversed later, then remove Spring and Collar Assembly (C).
 2. Pull Knob out and remove backplate Assembly. (Note: Be careful not to disturb or lose internal components.)
 3. Lift up Actuator Shaft and Cam Assembly. Flip over and remove retaining clip at bottom of Actuator Shaft. Remove Cam and flip over to achieve opposite handing desired according to Touch Bar brand, Fig 1 & 2. Reinstall Cam into bottom of Actuator then install Retaining Clip.
 4. Reinstall Actuator and Cam assembly back into Actuator Plate. Note: Actuator Plate stays always in the same position as in Fig 1 & 2.
 5. Reinstall Backplate Assembly and both Top and Bottom Studs. (Note: Make sure Actuator Plate is in locked or at rest position)
 6. Install knob in desired handing. Insert Spring and Collar Assembly (C) onto Knob Shaft. Reverse original handing of Locking Disk (B) by flipping horizontally and install Washer (D) and Knob Retaining Nut (A). Make sure Actuator Shaft rotation is correspondent to desired handing and that trim is functioning properly.
 7. Proceed with trim/device installation.

IMPORTANT: YOU MUST ENGAGE CAM EXACTLY AS SHOWN TO PREVENT ANY DAMAGE TO LOCK

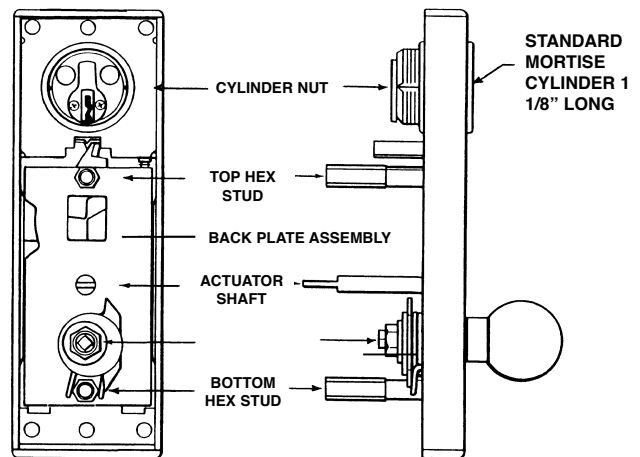


FIG.3

FIG.4

CYLINDER ASSEMBLY

1. Insert cylinder into control housing with cam in position shown. See Fig. 3.
2. Install cylinder nut and tighten securely.

ECONOMY SERIES ED-300

REVERSIBLE - RIM TYPE PUSH BAR EXIT DEVICES

also available with
Cam Keylock
MODEL
ED-K301



Also Available
with Key Lock
Dogging not
Shown—ED-K301

300 Series Rim Devices

An economy line, easy to install, rugged and durable, low maintenance, reversible with unique dogging feature.



**Underwriters
Laboratories
Listed for
USA and
Canada**

IMPORTANT - Please Note!

ED301 now useable on ANSI prepped steel doors with 2 3/4" backset. Specify with Ball Knob Lock BKL300 and with Lockfront Filler Plate (LF-1) and Strike Filler Plate (SF-1) shown here. For prices see pages G-21 and G-23.



BKL300
Ball Knob
Key Lock

LF-1




Lock
Front
Filler
Plate

SF-1



Strike
Filler
Plate

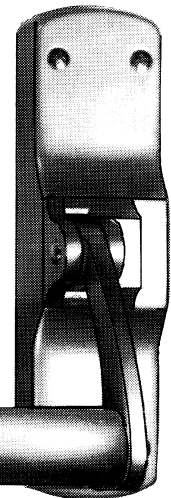

Features:

- Non-Handed — easily reversed
- Wrought steel and pressure cast chassis
- Pressure cast levers with seamless steel cross bar
- All internal operating parts are steel or solid brass
- Strike with additional shim plate
- Available with sex bolts for thru bolt mounting

Finishes:

3 Durable Baked Satin Enamel Finishes:

- Satin Aluminum (suffix A to Device Number)
- Satin Gold Bronze (suffix B to Device Number)
- Satin Duronodic (suffix D to Device Number)

2 NEW Polished Finishes:

- Polished Brass (suffix PB to Device Number) ✨
- Polished Chrome (suffix CMP to Device Number) ✨

Packing:


- One device per box — 6 per master carton with (pre-set) 3 RHR, 3 LHR
- Each unit packed with Rim Strike, Shim, Fastener Kit, Mounting Instructions & Templates. Cross Bar packed separately. Also available packed with cross bar in box. Specify Model BX-ED301 (add \$2.50 each)

Functions: ED301 Exit Only

- For functions with outside operation or trim, add trim numbers per trim pack description

Door Size:


- For all doors up to 36" in width, also available with longer cross bars for doors up to 48" (specify ED-301XL)

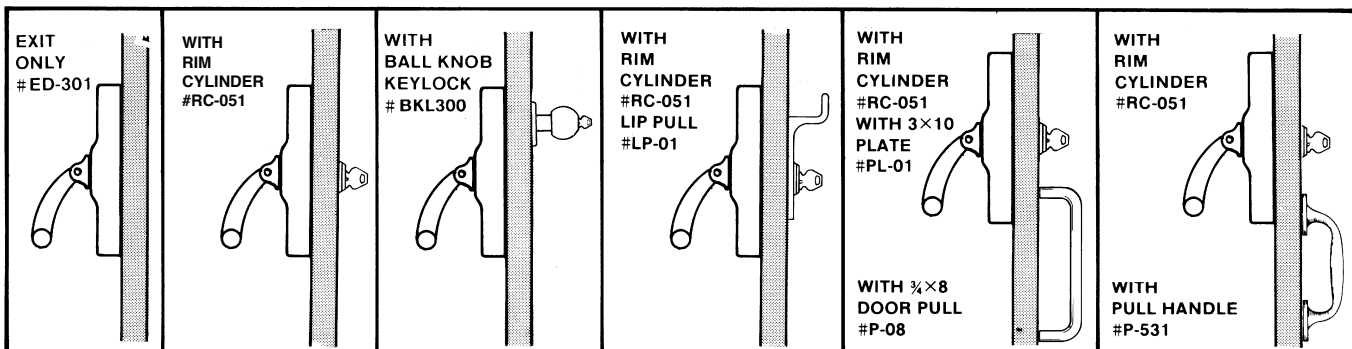

These Exit Devices have been marketed for 10 years in many foreign markets with thousands in use worldwide. Now also available in USA and Canada exclusively through TRANS-ATLANTIC CO.

ED-300 SERIES

ECONOMY SERIES RIM TYPE EXIT DEVICE

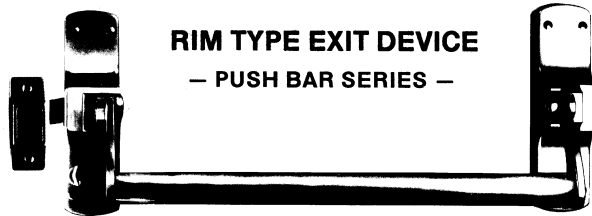

RIM TYPE EXIT DEVICE
— PUSH BAR SERIES —

PLEASE NOTE: THE ED-300 SERIES IS NOW UL TESTED AND LISTED

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

PRICE FOR EXIT ONLY Model ED301 Complete

Polished Brass
or Chrome Finish



in case lots of 6
less than case lots add 10%

PRICE FOR EXIT ONLY Model ED-K301 Complete

With Key Lock Dogging

Polished Brass
or Chrome Finish




in case lots of 6
less than case lots add 10%

Extra Charge for EXTRA LONG CROSSBAR

For doors up to 48" wide

Extra Charge for SEX BOLT KIT No. SB-8

per set (8 pcs.) with panic device




LF-1
Lock
Front
Filler
Plate

SF-1
Strike
Filler
Plate

per set

BKL300
BKL380


BALL KNOB
KEY LOCK



This model
number for use
with ED300 Series

US32D
US10B
US3

OUTSIDE TRIM PACKS AND ACCESSORIES



No. RC-051

RIM CYLINDER COMPLETE

Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.

For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.


Finishes:

Satin Chrome
Duronodic


3" x 10"
Plate

Solid Aluminum
Aluminum or
Brass Anodized

No. PL-01



No. PL-02



No. P-08

SOLID ALUMINUM PULL

1" wide x 8" long from center to center of screw holes. Solid aluminum.


Finishes:

US28 Satin Aluminum
US4 Satin Brass
Duronodic



No. LP-01
LIP PULL


Finishes
Painted Finishes
Aluminum
Bronze
Duronodic



US32D- Stainless Steel

No. SB-08

Please Note: Price shown is only when ordered with panic device. When ordered separately, price is \$.39 ea. or \$3.12 a set of 8.

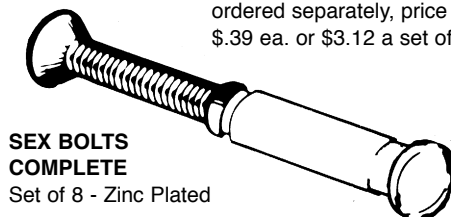

SEX BOLTS COMPLETE


Set of 8 - Zinc Plated

No. TA-P531

Commercial type Door Pull

A-Aluminum
F-Brass
D-Duronodic

7 1/2" long
1 7/8" wide
2 1/4" high



Quantity Discounts

20 Units - 5% discount • 50 Units - 10% • 100 Units - 15% discount
Less than case lots - add 10%

All accessories are strictly net.
No Extra Discounts

ECONOMY SERIES VR331 & N-VR331



EXIT DEVICE • REVERSIBLE • RIM TYPE TRADITIONAL MODEL with VERTICAL RODS

Now can be used with all our models of panic locks
for use on all ANSI prepped doors

300 Series Rim Devices

An economy line, easy to install, rugged & durable, low maintenance. Reversible for LHRB or RHRB applications

NEW IMPROVED **MODEL N-VR331**

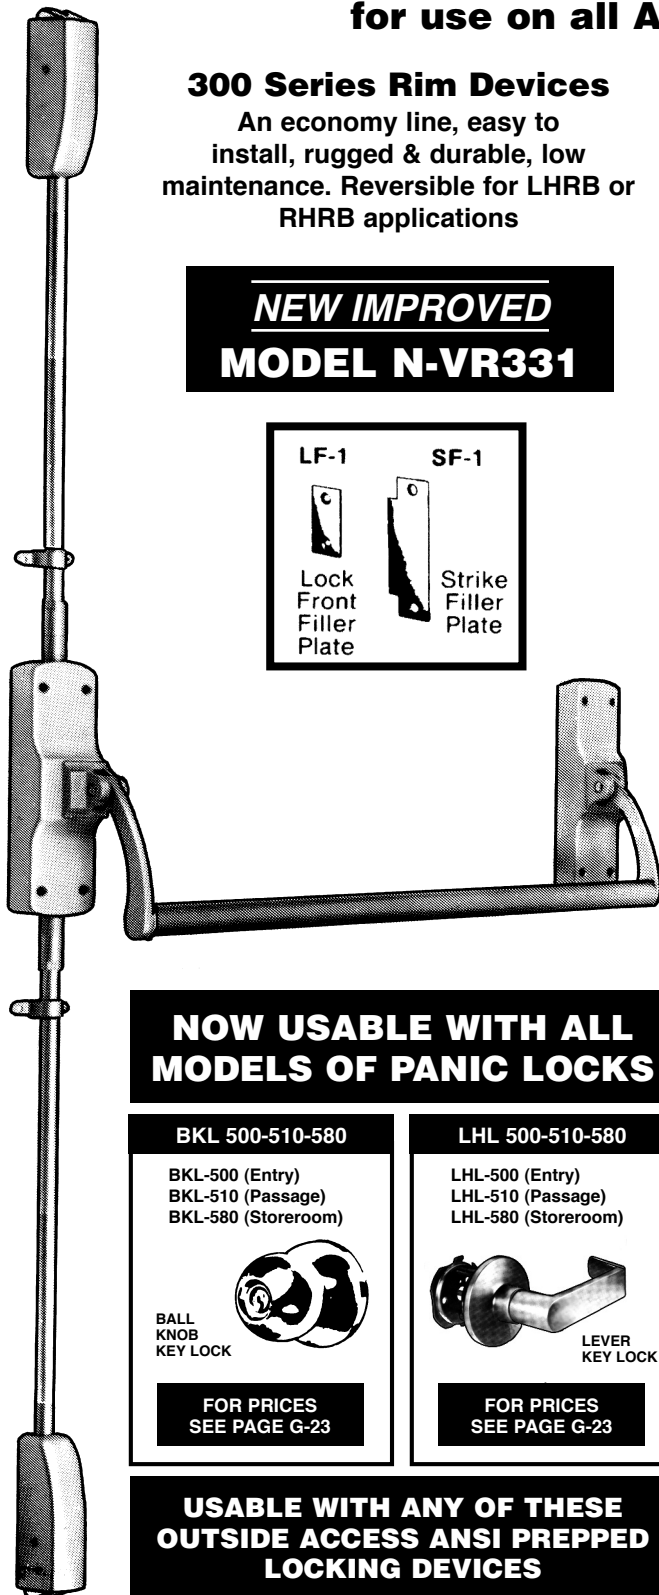

SPECIFICATIONS & FEATURES

- Non-handed, easily reversible.
- Wrought Steel & pressure cast chassis
- Pressure cast levers with seamless steel cross bars
- All internal parts are steel or solid brass
- Pullman Latches (at top)
Extruded brass, 15/16" throw, with hold-open feature. When in hold-open position, holds bottom latch too. Hold-open feature automatically releases both top and bottom latches!
- Pullman Latches (at bottom)
Extruded brass, 15/16" throw

FINISHES

- 3 Durable Baked Satin Enamel Finishes
 - Satin Aluminum (suffix A to Device Number)
 - Satin Gold Bronze (suffix B to Device Number)
 - Satin Duronodic (suffix D to Device Number)
- 2 NEW Polished Finishes:
 - Polished Brass (suffix PB to Device Number)
 - Polished Chrome (suffix CMP to Device Number)

PACKING

- One device per box – 6 per master carton with (pre-set) 3 RHR, 3 LHR
- Each unit packed with Rim Strike, Shim, Fastener Kit, Mounting Instructions & Templates. Cross Bar packed separately. Also available packed with cross bar in box. Specify Model BX-VR331 (add \$ ea.)

DOOR SIZE

- For all doors up to 36" in width, also available with longer cross bars for doors up to 48" (specify VR-331XL)

NOW USABLE WITH ALL MODELS OF PANIC LOCKS

BKL 500-510-580

BKL-500 (Entry)
BKL-510 (Passage)
BKL-580 (Storeroom)




BALL KNOB KEY LOCK

FOR PRICES
SEE PAGE G-23

LHL 500-510-580

LHL-500 (Entry)
LHL-510 (Passage)
LHL-580 (Storeroom)




LEVER KEY LOCK


FOR PRICES
SEE PAGE G-23

USABLE WITH ANY OF THESE
OUTSIDE ACCESS ANSI PREPPED
LOCKING DEVICES


WF-TP600




WF-L600



WF-K600



ECONOMY SERIES • VR331 & N-VR331 VERTICAL ROD TYPE RIM EXIT DEVICE

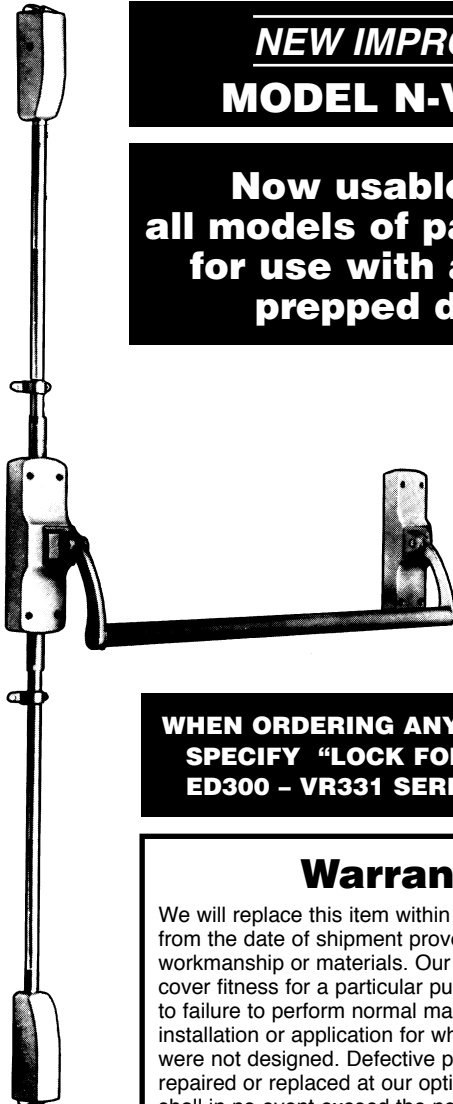

NEW IMPROVED MODEL N-VR331

**Now usable with
all models of panic locks
for use with all ANSI
prepped doors**



**WHEN ORDERING ANY PANIC LOCK
SPECIFY "LOCK FOR USE WITH
ED300 - VR331 SERIES PANICS"**

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

PRICE FOR EXIT ONLY Model VR331 Complete

Polished Brass
or Chrome Finish



in case lots of 6
less than case lots add 10%

This model available for use with
doors up to 10' high. Specify extra
long rods when ordering.

PRICE FOR EXIT ONLY Model VR331-XL Complete

Polished Brass
or Chrome Finish



in case lots of 6
less than case lots add 10%

This model available for use with
doors up to 8' high. Specify 12" rod
extension w/coupling.

EXTRA CHARGE FOR SB-8 SEX BOLT KIT

BKL500 SERIES

LHL500 SERIES


MODEL	FINISH	PRICE	MODEL	FINISH	PRICE
BKL500	US32D		DX-LHL500	US26D	
	US3			US3	
	US10B			US10B	
BKL510	US32D		DX-LHL510	US26D	
	US3			US3	
BKL580	US32D		DX-LHL580	US26D	
	US3			US3	
	US10B			US10B	

SEE LOCK PAGES FOR QUANTITY DISCOUNTS

WF-TP600	ALU	with plate without plate	WF-L600	ALU	with plate without plate
	DURO			DURO	
	BRONZE			BRONZE	
WF-K600	ALU	with plate without plate	SEE LOCK PAGES FOR QUANTITY DISCOUNTS		
	DURO				
	BRONZE				

No. PS-08 Overlapping Strike

For pair of doors,
rim and vertical
rod application,
use overlapping
strike No. PS-08




No. PS-03 No. PS-10

Used in conjunction with
Devices VR331 or ED301



Regular Strike for VR331

Standard strike supplied
with all Pullman latches with
vertical rod devices
(Both top and bottom latch)



Recessed Strike

When recessed strike
necessary, PS-10
supplied for bottom
Pullman latch



No. RC-051



RIM CYLINDER COMPLETE

Solid Brass Rim Cylinder complete with
adapter ring, 5 pin tumbler, available (KA)
or (KD) keying, Schlage C keyway.

For use on 2 1/8" diam. ANSI prepped door.
Specify with mounting plate #803.

Finishes:
Satin Chrome
Duronodic

No. PP-05 No. PP-06



PULL PLATE

Wrought Steel, Painted - 3 finishes
Polybagged with plate carriage bolts

Quantity Discounts

20 Units - 5% discount • 50 Units - 10% • 100 Units - 15% discount
Less than case lots - add 10%

All accessories are
strictly net.
No Extra Discounts

MODEL ED201

REVERSIBLE - NON-HANDED -RIM TYPE EXIT DEVICE

CROSS REFERENCE SARGENT 9898

- Precision Made
- Heavy Duty
- E-Z-to install
- Easy to maintain
- Positive hex key dogging



Underwriters Laboratories
Listed for USA and
Canada

ANSI PREPPED

ANSI GRADE 1

Features:

- One of the only **non-handed** conventional type rim exit devices, exactly same construction as Sargent model 9898
- Available in 3 finishes: US26D, US10B, and US28
- Three functions in one panic lock case. All parts are in place for dummy, key operated or thumb piece function.
- Basic Exit only unit easily converted for use with a variety of exterior access accessories including; Thumb Latch, Ball knob key lock, Rim cylinder, and Pulls
- Available for doors up to 48" wide

Specifications

Conforms to Federal Specifications FF-H-106A Series 810

For doors Packed standard for 1 $\frac{3}{4}$ " doors

Covers Bronze, Aluminum or Satin Chrome

Arms Bronze, Aluminum or Satin Chrome

Crossbar 1" bronze, aluminum or satin chrome tubing, .062" thick - Packed standard for use on 36" wide doors

Crossbar Ht 36" from floor standard - For elementary school installation, 33" from floor recommended

Reversible Not handed - Packed RHRB


Latchbolt Extruded brass, $\frac{5}{8}$ " throw

Keys Two, brass, nickel plated

Cylinders Brass, 5-Pin, Schlage C keyway

U.L. Listed For Panic

Finishes US10B, US26D, and US28

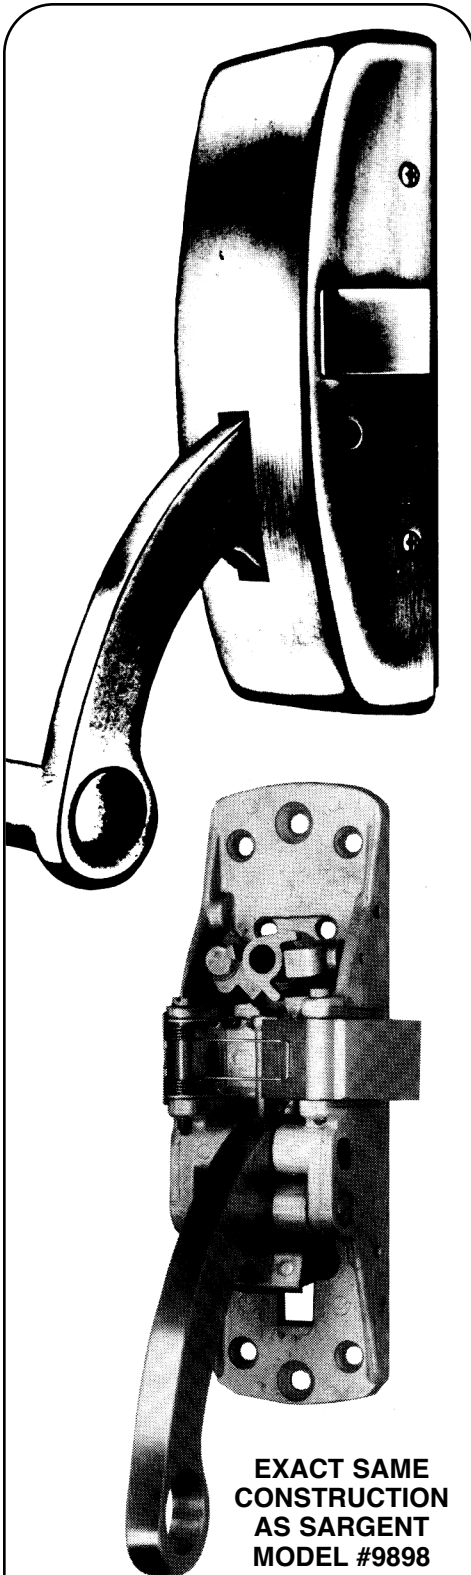


**EXACT SAME
CONSTRUCTION
AS SARGENT
MODEL #9898**

In order to appreciate the fine quality and construction of this exit device you should inspect one

Fire Rated model and Vertical Rod Model available soon

MODEL ED201

EXIT RIM DEVICE

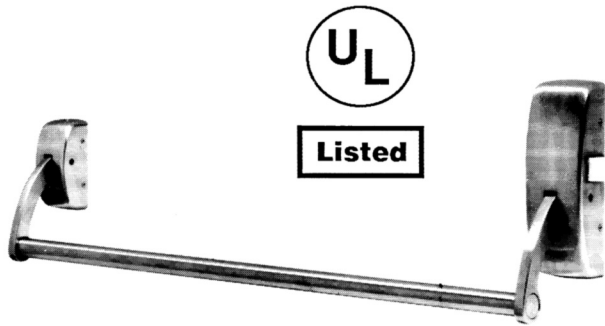

UNDERWRITER LABORATORIES LISTED. LISTING #45R7

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

Price for Exit Device Only —

ED201- US28	ED201- US26D	ED201- US10B
--------------------	---------------------	---------------------

Priced in case lots of 6

Less than case lots add 10%

Price for Exit Device Only — XL Model

ED201XL- US28	ED201XL- US26D	ED201XL- US10B
----------------------	-----------------------	-----------------------

Priced in case lots of 6

Less than case lots add 10%

LF-1



Lock Front Filler Plate

SF-1



Strike Filler Plate

\$1.64 per set

BKL-500 - ENTRANCE FUNCTION
BKL-530 - ENTRY KEY FUNCTION
 (1 3/8" Doors)
BKL-580 - STOREROOM FUNCTION



US32D
US10B
US3

QUANTITY DISCOUNT


24 UNITS - LESS 5%
48 UNITS - LESS 7 1/2%
96 UNITS - LESS 10%

LESS THAN CASE LOTS ADD 10%

ALL ACCESSORIES ARE STRICTLY NET

OUTSIDE TRIM PACKS & ACCESSORIES

TPB - TPA

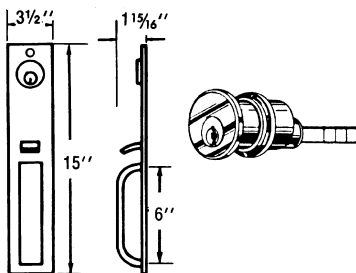

TRIM PACKAGE

Thumb Piece w/Plate and Rim Cylinder (RC-051C)

TPB or TPA will cover cutouts manufactured in accordance with ASA standards. Trim is thru-bolted to center case with exposed grommet nuts.

TPB x US26D

TPB x US10B

TPA x US28

No. RC-051



RIM CYLINDER COMPLETE

Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.

For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.

Finishes:
 Satin Chrome
 Duronodic

No. P-08

SOLID ALUMINUM PULL

1" wide x 8" long from center to center of screw holes. Solid aluminum.

Finishes:
 US28 Satin Aluminum
 US4 Satin Brass
 Duronodic



No. SB-08

Please Note: Price shown is only when ordered with panic device. When ordered separately, price is \$.39 ea. or \$3.12 a set of 8



SEX BOLTS COMPLETE


Set of 8
 Zinc Plated

No. TA-P531

Commercial Type Door Pull

A—Aluminum
 F—Brass
 D—Duronodic

7 1/2" long
 1 7/8" wide
 2 1/4" high



VR-231

CONVENTIONAL
PUSH BAR SERIES


SURFACE MOUNTED • REVERSIBLE • RIM TYPE VERTICAL ROD TYPE




CROSS REFERENCE:
SARGENT 9700



**Underwriters
Laboratories
Listed for USA
and Canada
#45R7**

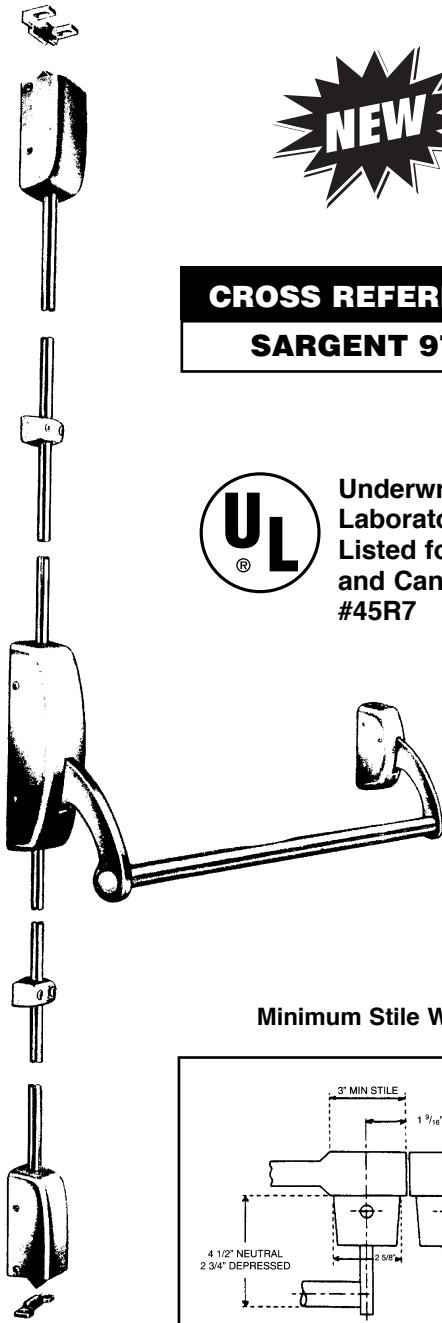

Minimum Stile Width

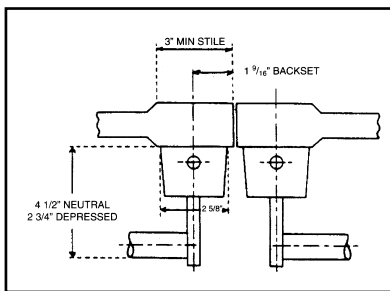

EXIT ONLY VR-231	EXIT ONLY VR-231 WITH PULL P08	EXIT/ENTRANCE VR-231 WITH THUMB LATCH TPB Passage function only

SPECIFICATIONS & FEATURES

- Conforms to ANSI Std. A156.3 Grade 1
- Available with most popular types of exterior access accessories
- Minimum working parts
- Easy installation
- Non-handed

FINISHES

- Available in five finishes :
- Satin Alum. (suffix A to Device No. VR-231)
 - Satin Gold Bronze (suffix B to Device No. VR-231)
 - Satin Chrome (suffix C to Device No. VR-231)
 - Duronodic (Suffix D to Device No. VR-231)
 - Oil Rubbed Bronze (Suffix RB to Device No. VR-231)

PACKING

- One device per box - 6 per master carton
- Each unit packed with Rim Strike, Shim, complete kit of fasteners including mounting templates and instructions
- Blank filler plate for lock backset, Blank ANSI Strike for frame, 4 sex bolts complete available

FUNCTIONS

- For functions with outside operation or trim, add trim numbers per trim pack description

DOOR SIZE

- For all doors up to 38" in width, specify Model VR-231. Wider doors up to 48" specify VR-231-XL

PAIR OF DOORS

- Useable on pairs of doors; 2 vertical rod type or 1 VR-231 and 1 ED201 (use strike #PS-09)

DOGGING

- with Hex Key Dogging

MODEL VR-231

EXIT RIM DEVICE

Warranty

We will replace this item within a one year period from the date of shipment proven defective in workmanship or materials. Our warranty does not cover fitness for a particular purpose, defects due to failure to perform normal maintenance, faulty installation or application for which our products were not designed. Defective product will be repaired or replaced at our option. Our liability shall in no event exceed the net cost of the merchandise. No material may be returned without our written consent. We are not responsible for any charges for labor or materials incurred by others. This is the limit of warranty and liability for our products.

PRICE FOR EXIT DEVICE ONLY

VR231-US28	
VR231-US26D/US10B	
VR231XL-US28	
VR231XL-US26D/US10B	
LESS THAN CASE LOTS ADD 10%	

LF-1
Lock Front
Filler Plate



SF-1
Strike
Filler Plate




per set

QUANTITY DISCOUNT

24 UNITS - LESS 5%
48 UNITS - LESS 10%
96 UNITS - LESS 15%
LESS THAN CASE LOTS ADD 10%

ALL ACCESSORIES ARE STRICTLY NET

OUTSIDE TRIM PACKS & ACCESSORIES



TPB - TPA

TPB or TPA will cover cutouts manufactured in accordance with ASA standards. Trim is thru-bolted to center case with exposed grommet nuts.

TRIM PACKAGE

Thumb Piece w/Plate
No Rim Cylinder

PASSAGE FUNCTION ONLY


TPB x US26D

TPB x US10B


TPA x US28

No. PS-08 Overlapping Strike

For pair of doors, rim and vertical rod application, use overlapping strike No. PS-08



No. SB-08 Sex Bolts Complete Set of 8 Zinc Plated




Please Note: Price shown is only when ordered with panic device. When ordered separately, price is \$0.39 each or \$3.12 a set of 8

No. TA-P531 Commercial Type Door Pull

Finishes:
A-Aluminum
F-Brass
D-Duronodic

7 1/2" long
1 7/8" wide
2 1/4" high



\$3.50 ea.

No. P-08 Solid Aluminum Pull

1" wide x 8" long from center to center of screw holes. Solid aluminum.

Finishes:
US28 Satin Aluminum
US4 Satin Brass
Duronodic





SERIES ED-800

NARROW STILE EXIT DEVICES

Rim • Vertical Rod Rim • Vertical Rod Concealed • Push Bar Type

Suitable for narrow, medium or wide stile aluminum doors or 1 $\frac{3}{4}$ " hollow metal. For use on outswinging single acting doors, hung on hinges or offset or center hung pivots.

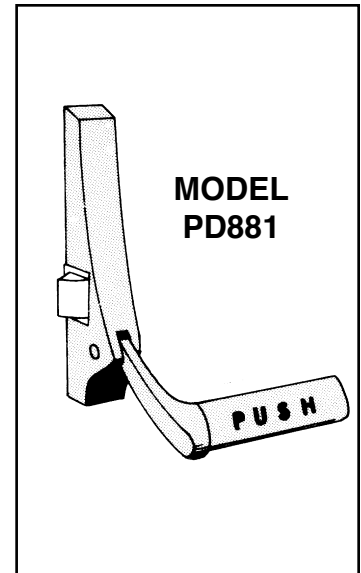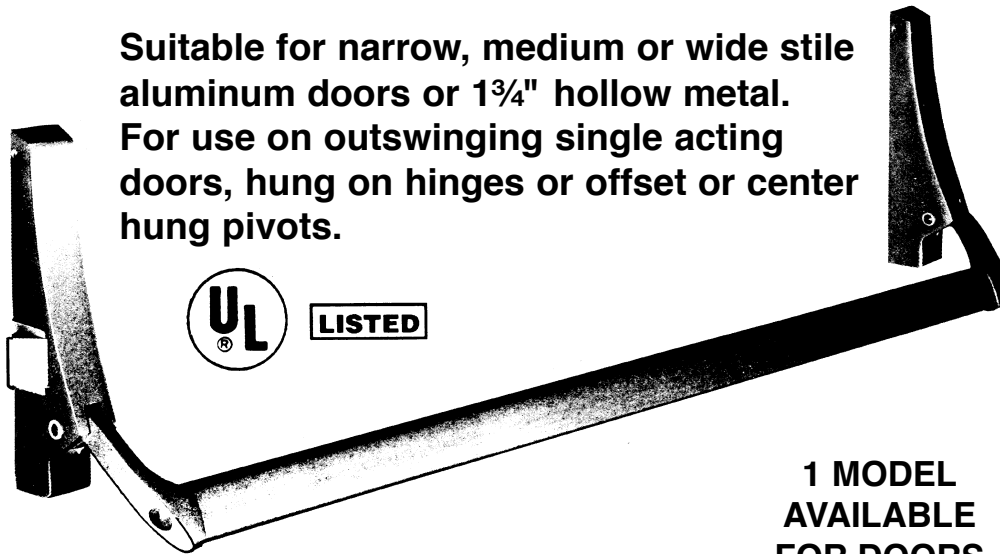

MODEL
PD881

Push Paddle
EXIT DEVICE

1 MODEL
AVAILABLE
FOR DOORS
UP TO 42"
WIDE

FINISHES


ALU = Satin Aluminum
DURO = Satin Duronodic

CROSS REFERENCE

JACKSON No. 1095

DOROMATIC No. 2090

Regular Rim Application

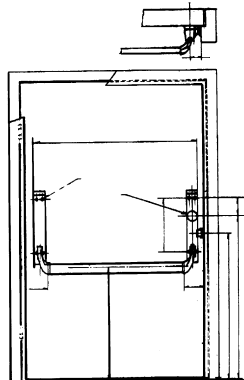


ED801 RIM TYPE

Features

- Concealed fastenings
- Pullman type steel latch
- 1 $\frac{1}{16}$ " wide x 7 $\frac{1}{2}$ " long x 2 $\frac{1}{2}$ " projection permit use on narrow stile doors as small as 1 $\frac{3}{4}$ " wide and all wider ones
- Wear points insulated by nylon sleeves and rollers
- Contoured cross-bar
- Functional easy to operate dogging - hold-open feature
- Handed - non-reversible
- Surface mounted rim strike does not require cut-out and has nylon silencer feature

Concealed V/R Application

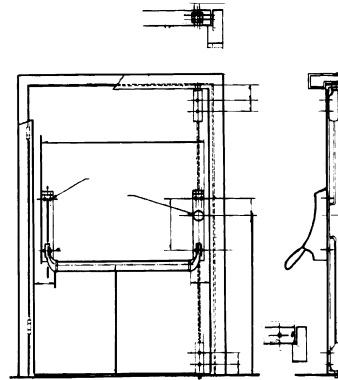

VC861 CONCEALED V/R TYPE

Features


- Concealed fastenings
- Pullman type top & bottom latches
- 1 $\frac{1}{16}$ " wide x 7 $\frac{1}{2}$ " long x 2 $\frac{1}{2}$ " projection permit use on narrow stile doors as small as 1 $\frac{3}{4}$ " wide and all wider ones
- Wear points insulated by nylon sleeves and rollers
- Contoured cross-bar
- Functional easy to operate dogging - hold-open feature
- Reversible -- non-handed
- Adjustable top rod assembly for custom fitting
- Steel rods add strength and endurance

ECONOMY PRICED • COMPARE OUR PRICES WITH COMPETITION

NARROW STILE EXIT DEVICES

SERIES ED-800


MOUNTING TEMPLATE

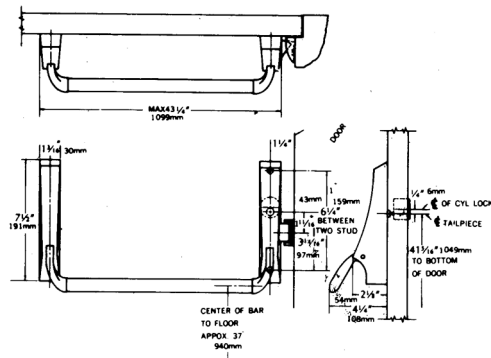

Standard models ED801 and VC861 are for use on doors up to 42" wide.


ED801 Rim Type

MOUNTING TEMPLATE

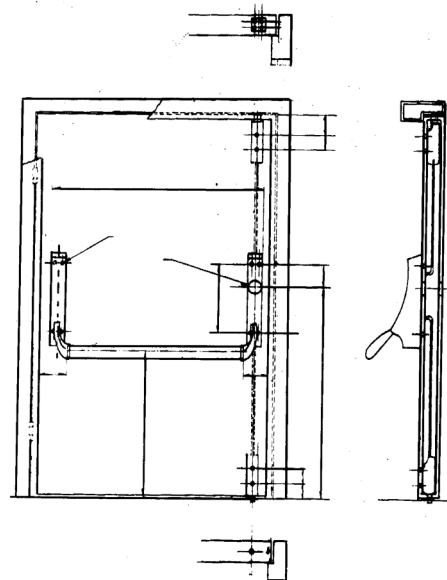


VC861 V/R Concealed Type

HAND OF DOOR

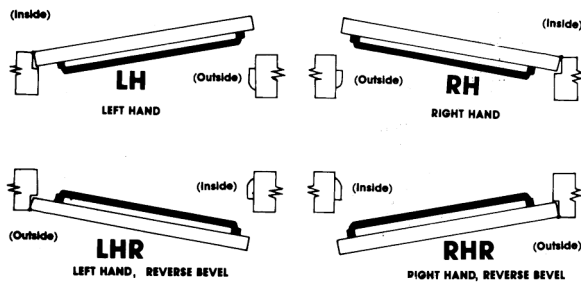

PD881 PUSH PADDLE EXIT DEVICE



Model PD881
Used with active case of an exit device in lieu of crossbar and eliminating the inactive case. (handed)

OUTSIDE TRIM

No. RC-051 Finishes: Satin Chrome, Duronodic



RIM CYLINDER COMPLETE
Solid Brass Rim Cylinder complete with adapter ring, 5 pin tumbler, available (KA) or (KD) keying, Schlage C keyway.

For use on 2 1/8" diam. ANSI prepped door. Specify with mounting plate #803.

P-09



Solid Aluminum & Duro Offset Pull

LP-01



Lip Pull

Aluminum or Duronodic

FUNCTIONS

EXIT ONLY



EXIT ONLY



EXIT WITH P-09 PULL

EXIT & ENTRANCE



EXIT WITH RC-051 RIM CYLINDER



EXIT WITH P-09 PULL AND RC-051 RIM CYLINDER

NET PRICE EA. — COMPLETE UNIT

ED801 ALU
ED801 DURO

When ordering specify hand (LHR or RHR)

VC861 ALU
VC861 DURO

(non-handed)

PD881 ALU
PD881 DURO

When ordering specify hand (LHR or RHR)

PRICES SHOWN ABOVE ARE IN CASE LOTS OF 6 • LESS THAN CASE LOTS ADD 10%

QUANTITY DISCOUNTS


24 UNITS - LESS 5% DISCOUNT
48 UNITS - LESS 10% DISCOUNT
96 UNITS - LESS 15% DISCOUNT

• CAN BE ASSORTED TO SECURE QUANTITY DISCOUNTS
• ALL ACCESSORIES ARE NET

STANDARD OR HEAVY DUTY RIM TYPE ELECTRIC STRIKES

For Use with Rim Panic Exit Devices

SD3310 - STANDARD DUTY
XH3310 - EXTRA HEAVY-DUTY
(SOLID STAINLESS STEEL)

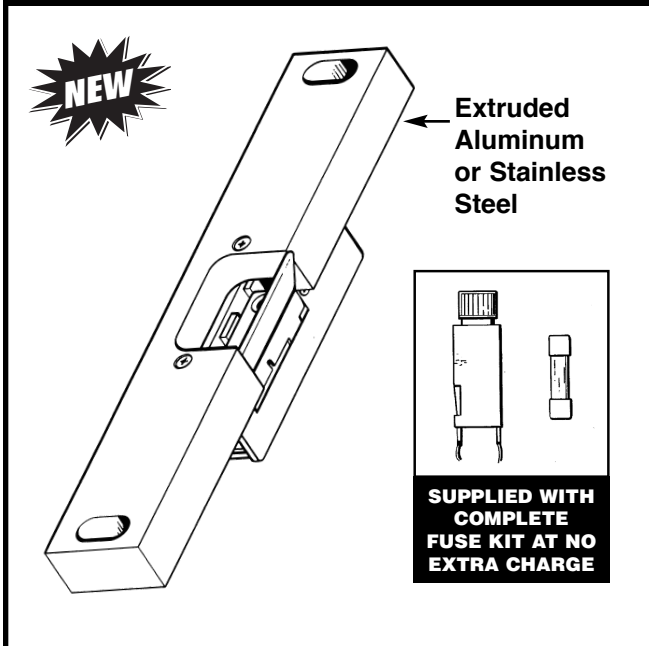

USEABLE ON ALL BRANDS OF RIM PANIC EXIT DEVICES

STANDARD FEATURES

- Finish: US4 (Satin Brass)
US28 (Satin Aluminum)
US32D (Brushed Stainless Steel)
- Surface mounted on 1 3/4" frames or partially mortised into 2" frames depending on the strike projection
- Holding Force 1000 lbs.
- Cycle Tested 400,000
- Tamper resistant
- Any size door frame
- Non fail safe
- 12V or 24V - AC or DC
- Extruded aluminum face plate
- Non handed
- 2 way horizontal adjustment
- Supplied with mounting screws

CROSS REFERENCE

FOLGER ADAM - Model 310-4

HOW TO ORDER:

SD3310- X - Y - Z

01-08 VOLTAGE

FINISH:
F = Satin Brass
A = US28

4 = 3/4" Face Plate
4SF = 1/2" Face Plate

XH3310- X - Y - Z

01-08 VOLTAGE

FINISH:
F = Satin Brass
SS = US32D

4 = 3/4" Face Plate
4SF = 1/2" Face Plate

OPTIONAL FEATURES

- AC or DC Transformer
- Rectifier - FOR AC USE
- Remote control unit

FOR USE WITH RIM MOUNTED PANIC EXIT DEVICES

PRICE

SD3310
XH3310

QUANTITY DISCOUNT

10 UNITS - LESS 5%
25 UNITS - LESS 10%


No Finer Electric Strike Made for Use with Rim Panic Exit Devices!

**Trans-Atlantic Now Offers You...
All Models of our ED500 Series
Reversible - Rim Type
TOUCH BAR EXIT DEVICES**

Complete with an ALARM KIT

**Model No.
EAK500**

This is a self contained battery operated alarm unit that is easily installed and used with any model of our 500 series panic devices.

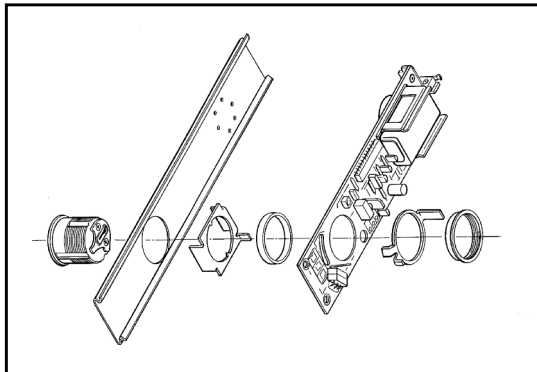

**NOW WITH
LOUDER,
MORE
INTENSE
SOUNDING
ALARM!
(100-120 db)**


E



Alarm Unit Under This Plate

The **EAK500** Alarm Kit can be Retrofitted to any 500 series Panic Device.

ED501 PANIC DEVICE complete with EAK500 ALARM KIT \$

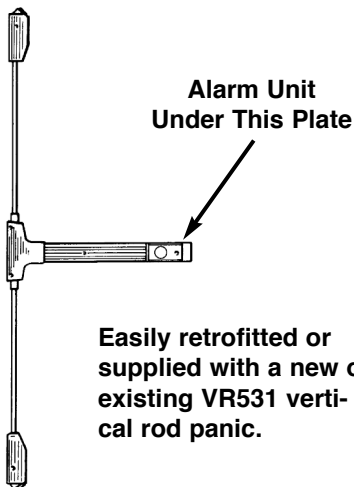

Alarm Unit Under This Plate

Easily retrofitted or supplied with a new or existing VR531 vertical rod panic.

Combining an **EAK500** Alarm Kit with any 500 series Rim Panic Device will result in an **EXCELLENT:**

EXIT ALARM RIM PANIC DEVICE

WITH MANY OPTIONAL FEATURES:


- Can be activated or deactivated via the mortise cylinder.
- Includes time delay feature when arming to permit exiting before unit is armed.
- Can also be used with our ETB500 Touch-Bar Device.

PRICE

EAK500
Alarm Kit complete with key cylinder

When supplied with any 500 SERIES panic device, ADD \$ to the net price of the panic device.

Each

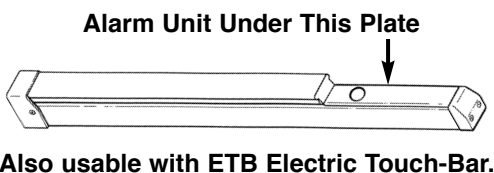

Alarm Unit Under This Plate

Also usable with ETB Electric Touch-Bar.

Seeing Is Believing...

ORDER SAMPLES NOW!

You can't tell the quality
of a product without inspecting it.



Call Today
AND SEE FOR
YOURSELF!

800-523-9956

NO RISK OR OBLIGATION TO BUY!

- *Keep samples for 90 days at no cost.*
- *After 90 days, purchase the items or return them to us.*

5%

BONUS CREDIT

On your first order for any items you sample.

You Pay Nothing...

*unless you keep the samples.
If you decide not to, we'll
even pay the return shipping.*